Out of the Wood

BY MIKE WOOD

When white light isn't white— Part 2



LAST ISSUE WE TALKED ABOUT WHITE LIGHT from LEDs and how *white* might mean different things at different times with different LEDs. In particular we concentrated on broadband white emitters that use a deep blue or UV LED die with a phosphor coating to create white light, but also talked about the white produced by a combination of red, green and blue (RGB) emitters. In this issue I want to expand on the topic a bit further and look at what happens when you dim those same LEDs.

Up until recently what happened when you dim an LED wasn't much of a concern—they often weren't really bright enough so we were nearly always using them at full power anyway. Also, as we discussed last time, the major use was as effects lighting in mid to saturated colors where any color shift when dimming was rarely noticeable. However, we are now starting to use these sources as white light to illuminate performers where our needs are much more critical. In the last year or so we've seen TV news studios using fully white LED lighting rigs for all their lighting, including key and fill lights on the newscasters. They still aren't really dimming them much, but that day is close at hand.

(It's faces that matter and where we make our decisions ... **)**

We are all very familiar with what happens when you dim an incandescent lamp. As the filament power is reduced it cools and emits less light, that cooling also means the color shifts towards the red end of the spectrum. The color point always remains on the Planckian locus (black body line) but at a lower color temperature. This color shift seems very natural to us; partly I think because it's what we have grown up with since Edison & Swan (I'm not getting into the discussion of which it was!) introduced incandescent lamps, but also at a more fundamental level because it's what you see in nature. What happens when the sun goes down at dusk? The sky gets redder. Throw a log on the fire and you see the colors of incandescence as the wood and ash heat up and burn with that familiar shift from black to red, through orange, and on to yellow. Coal burning in a furnace gets hotter still, and almost gets to a whitish incandescence. Whatever the reason I believe this color shift is very deeply ingrained in the human perception system and looks *natural*. As a lamp changes color along the Planckian locus we see the color is changing but we accept it and unconsciously allow for it.

Figure 1 shows the same scene with different colors of illumination but I hope you'll agree that both appear completely natural.



Figure 1 – Warm and cool light

On the right hand side is the picture as it was taken in daylight where the colors are cool. That on the left simulates the same shot later in the day as the sun is setting. Much warmer color tones but it doesn't look wrong, our brain is quite happy to accept either of these as correct. It's faces that matter and where we make our decisions—if faces look right then we are quite happy with everything else. If you take a close up on a part of the photo then the difference is more pronounced and the color difference much more obvious.



Figure 2 – The same color?

This is what's going on when we dim an incandescent lamp on stage. The color changes, but in a way we are comfortable with. Would it be better if it didn't change? Possibly—but if it didn't would we end up having to put the color shift back in to make the scene look natural? At least that way it would be under the control of the lighting designer.

The other light sources we are very familiar with for entertainment use are high intensity discharge (HID) lamps such as HMI, MSR, Xenon and so on. It's very common for these to be dimmed in an optical or mechanical fashion where an iris or other mechanism progressively cuts out more and more light. This gives dimming without color change and, again, we know about it and use it appropriately. For example I think a dim with no color change is entirely appropriate for a fade to black on a follow spot—a follow spot dimming isn't a naturally occurring event and we know it. It's more important that the audience's attention isn't distracted from looking at the performer, so a smooth color-change-free fade works well. Similarly, it's often true that a fade on a moving light being used as an effects projector should be color-change-free.

The problem comes when we try and mix these technologies and tasks. It's become increasingly common to use moving lights to augment the conventional luminaires on a stage not just as effects lights, but also as key or modeling lights on performers. Now if we try and dim the entire composite scene we get a conflict—the incandescent lights get redder while the moving lights don't. That conflict can jar and change the whole appearance and emphasis of the scene. Depending on the overall brightness ratio of the two lamp types your beautifully balanced scene suddenly tilts one way or the other; the incandescent lights might look unnaturally red or the moving lights chillingly blue. The designer can compensate by subtly tweaking the color mixing of the moving lights if they have the facility, but the result isn't always as planned.

All this is by way of a preamble to set the scene for our LED discussion. The problem when we dim LEDs is that pretty much anything might happen. Depending on which type of LED technology is being used, and what dimming method, the color point may rise, may fall, may stay the same or may even go off sideways!

There are two (at least) types of dimming used for LED based luminaires. The most common is PWM (Pulse Width Modulation) dimming where the LED is switched from full on to full off very rapidly. This switching happens so quickly and at such a high rate that the eye doesn't see the transitions and integrates the individual flashes into what appears to be a continuously illuminated light. The amount of time the LED is on relative to the time it's off determines the apparent brightness. This is a very efficient means of dimming as the driver electronics are always operating at full on or full off rather than in the "in between" area where semiconductor devices can be very lossy. There is another way of dimming LEDs, however, where we directly control the current value in an analog manner so the current smoothly rises as we fade up the LED. The relationship between current and light output isn't a linear one but the technique works and is very controllable.

C... your beautifully balanced scene suddenly tilts one way or the other; the incandescent lights might look unnaturally red or the moving lights chillingly blue.

What's perhaps odd is that the color point of an LED when it's being dimmed differs between these two techniques. Once you realize that LEDs have a highly non-linear relationship between both voltage and current and current and light output, and that the color changes both with current and with temperature then this perhaps isn't quite so odd.

When an LED is run from a PWM signal it only ever sees two current values; zero and full. That means that the color point when the LED is at full current is the only color point we ever see. When it's at the zero part of the PWM cycle there's no light output anyway! However when you run that same LED from a varying current source then the LED sees all the intermediate current values and its color point varies as the current changes. In both cases there's also a change of color with temperature. However that tends to be the same for both dimming systems as the temperature is dependent on the average power consumed by the LED which, within reason, will be the same in both cases.

To try and make this clearer—imagine an extreme case where the color of a hypothetical LED varies from blue at low currents up to red at high currents. If you run it with a PWM signal then either



it's running at the high current, red, end or it's off; nothing else is possible. What you have in this case is a rapidly flashing red light. Now consider that same hypothetical LED running off a current source, this time as you dim it will move from red towards the blue changing color all the time as the current changes.

To complicate things further, different types and colors of LEDs also have different non-linear behavior. For example red, green and blue LEDs all dim differently, and have different temperature dependencies. Add in the phosphors for white LEDs and things get really complicated! In just our simple case restricted to two methods of dimming we have four possible scenarios; PWM dimming with phosphor white LEDS or RGB LEDs and current dimming with both types of LEDs, and they all behave differently!

The phosphor white LEDs where the white is produced by using a blue/UV LED plus phosphor exhibit the smallest overall shift in color as dimmed. This isn't too surprising as the light emitted by phosphor (usually around the yellow wavelengths) isn't significantly affected by all the changes—it's the blue LED die itself that changes and exhibits the non-linearity.

So let's look at those white LEDs first. According to research done at the Lighting Research Center of Rensselaer Polytechnic Institute_(*Ref 1*) dimming a phosphor coated white LED using PWM from 100% down to 3% resulted in a very small color shift of around the size of a 2-step MacAdam ellipse, small enough that it likely wouldn't be noticed. What shift occurred moved the color point towards shorter wavelengths—i.e. towards the blue.

It was a completely different story though when exactly the same LED was dimmed using current source dimming. This time the color point shifted by a very noticeable amount; more than the size of a 4-step MacAdam ellipse and around three times the shift that PWM caused. That's a very visible change and one that most people would notice, particularly if a dimmed LED and an undimmed one were viewed side by side. What's even odder and counter-intuitive (at least to me) is that the shift using current source dimming is in the *opposite* direction from that seen when using PWM dimming. The source color point moves in a direction that decreases its effective color temperature and, more worryingly, moves it towards the green area of the CIE chart.

Note: We've talked about MacAdam ellipses in earlier articles specifically in the last issue where we discussed LED binning. A single step MacAdam ellipse represents a region plotted on a color space diagram showing where colors are perceived to be the same by the average viewer. Thus a 4-step ellipse is four times larger—in other words a color difference that is four times more than the minimum color difference we can see.

Both these color shifts pale into insignificance however once we start looking at dimming a white source produced using RGB LEDs. **Figure 3** shows the big picture on the CIE chart.

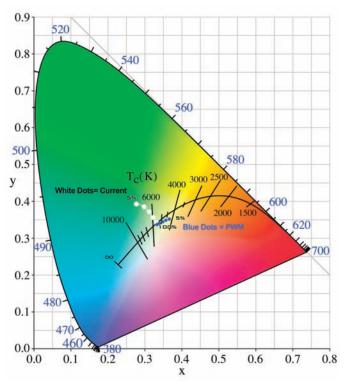


Figure 3 – Dimming color shift for a White source using RGB LEDs

The blue dots on **Figure 3** show how the color point of an RGB combination moves as it's dimmed using PWM. At 100% output it emits light with a color temperature just less than 6000 K and a color point close to the Planckian locus. As the power is reduced by PWM dimming the three colors equally the color point shifts to the right, or lower color temperature, keeping fairly close to the locus and ends up with a correlated color temperature (CCT) of about 4000 K when dimmed down to 5%. This is familiar behavior somewhat similar to an incandescent source, albeit a smaller shift over that range. I would imagine that this shift looks fairly natural to the eye.

Current source dimming those same LEDs gives us completely different results. Look at the white dots on **Figure 3**, they start out at just under 6000 K again at full power but this time dimming moves the color point pretty much perpendicular to the Planckian locus and sharply towards the green area of the chart as well as increasing the CCT to about 7500 K. This much shift on the CIE chart is very significant and would likely be very objectionable. I should point out that these shifts would only be seen when running all three LEDs with the same linear dimming curve. I would hope and expect that any manufacturer using such a technique would be aware of this issue and would modify the dimming curves to help counteract this effect. **Figure 4** illustrates the results for these four combinations in more detail. The color points all start at much the same point at 100% but then shoot off in different directions as the LEDs are dimmed.

Out of the Wood | When white light isn't white—Part 2

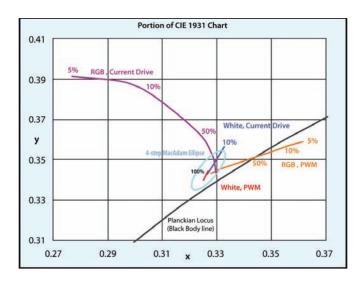


Figure 4 – Dimming color shift for Phosphor White and RGB LEDs.

These are worst case scenarios chosen for emphasis and, depending on how much the manufacturer of an LED fixture takes control of this situation and how much they leave up to the user; you may not see such extreme cases as illustrated here. However these shifts are all real and are something else we need to understand about using LEDs. If color consistency when dimming is important to you, then you need to look at the exact units you are planning to specify on a show using the control and dimming you are intending to use. The last LED fixture you used behaved in one manner when dimmed, but the chances are that another luminaire from a different manufacturer will behave differently. It isn't that one is right and the other is wrong—it's just a question of understanding the issues and knowing which is which.

Thanks to the Lighting Research Center of the Rensselaer Polytechnic Institute, Troy, NY for permission to quote extracts from their research which was sponsored by the Alliance for Solid-State Illumination Systems and Technologies (ASSIST)

Mike Wood is President of Mike Wood Consulting LLC which provides consulting support to companies within the entertainment industry on technology strategy, R&D, standards, and Intellectual Property. A 30-year veteran of the entertainment technology industry, Mike is the Treasurer and Immediate Past President of ESTA.

Reference:

1. Dyble, M, N. Narendran, A. Bierman, and T. Klein. 2005. *Impact of dimming white LEDs: Chromaticity shifts due to different dimming methods.* Fifth International Conference on Solid State Lighting, Proceedings of SPIE 5941, 291-299. Bellingham, WA: International Society of Optical Engineers.



19 PROTOCOL