



US010015460B2

(12) **United States Patent**
Hochman

(10) **Patent No.:** **US 10,015,460 B2**

(45) **Date of Patent:** **Jul. 3, 2018**

(54) **CONTROL AND DISPLAY SYSTEM WITH SYNCHRONOUS DIRECT VIEW VIDEO ARRAY AND INCIDENT KEY LIGHTING**

(71) Applicant: **Revolution Display, LLC**, Glendale, CA (US)

(72) Inventor: **Jeremy Hochman**, Walnut, CA (US)

(73) Assignee: **Revolution Display, LLC**, Glendale, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/644,386**

(22) Filed: **Jul. 7, 2017**

(65) **Prior Publication Data**

US 2017/0310941 A1 Oct. 26, 2017

Related U.S. Application Data

(60) Continuation of application No. 15/260,559, filed on Sep. 9, 2016, now Pat. No. 9,706,183, which is a (Continued)

(51) **Int. Cl.**
H04N 9/75 (2006.01)
H04N 9/44 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H04N 9/75** (2013.01); **H04N 9/12** (2013.01); **H04N 9/44** (2013.01); **H05B 33/086** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC ... H04N 9/75; H04N 9/12; H04N 9/44; H05B 33/086; H05B 33/0863; H05B 33/0872; H05B 33/029

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,386,363 A 5/1983 Morrison
5,838,310 A 11/1998 Uya
6,292,227 B1 9/2001 Wilf et al.
6,490,006 B1 12/2002 Monjo

(Continued)

FOREIGN PATENT DOCUMENTS

WO 1998031153 7/1998
WO 2012150378 A1 11/2012
WO 2013167901 A1 11/2013

OTHER PUBLICATIONS

European Extended Search Report dated Nov. 7, 2017, in corresponding EU Patent Application No. 14888591.6.
International Search Report and Written Opinion dated Aug. 21, 2014, in corresponding International Application No. PCT/US2014/033542, filed Apr. 9, 2014.


Primary Examiner — Michael Teitelbaum

(74) *Attorney, Agent, or Firm* — Downs Rachlin Martin PLLC

(57) **ABSTRACT**

Various embodiments relate to an apparatus for controlling a lighting device. A light control circuit can use a controlled lighting sequence control and drive viewed sections of a lighting device to display chroma key color or emit infrared light, while driving other unviewed portions of the lighting device to display ambient and incident lighting. The viewed and unviewed lighting sections can be based on the field of vision of an image capture device and can change in relation to movements of the image capture device. A sensor can make measurements to determine the field of vision of the image capture device and can be used to generate or modify the controlled lighting sequence. An image processing circuit can generate a composite image using the chroma key while maintaining the subjects that are captured using ambient and incident lighting.

32 Claims, 4 Drawing Sheets

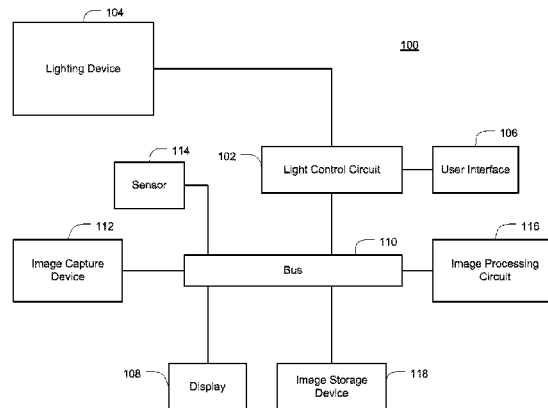

Related U.S. Application Data

division of application No. 14/248,212, filed on Apr. 8, 2014, now abandoned.

(51) **Int. Cl.**

H04N 9/12 (2006.01)

H05B 33/08 (2006.01)

H05B 37/02 (2006.01)

(52) **U.S. Cl.**

CPC *H05B 33/0863* (2013.01); *H05B 33/0872* (2013.01); *H05B 37/029* (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

6,897,984 B2	5/2005	Warthen
8,253,822 B2	8/2012	Yule et al.
8,264,458 B2	9/2012	Kurtz et al.
8,837,855 B2	9/2014	Relyea et al.
9,264,627 B2	2/2016	Holmes et al.
2002/0150400 A1	10/2002	Warthen
2008/0136348 A1	6/2008	Varrin et al.
2008/0247727 A1	10/2008	Hochman et al.
2010/0128137 A1	5/2010	Guidash
2011/0117532 A1	5/2011	Relyea et al.
2015/0250041 A1	9/2015	Jobe et al.
2015/0289338 A1	10/2015	Hochman

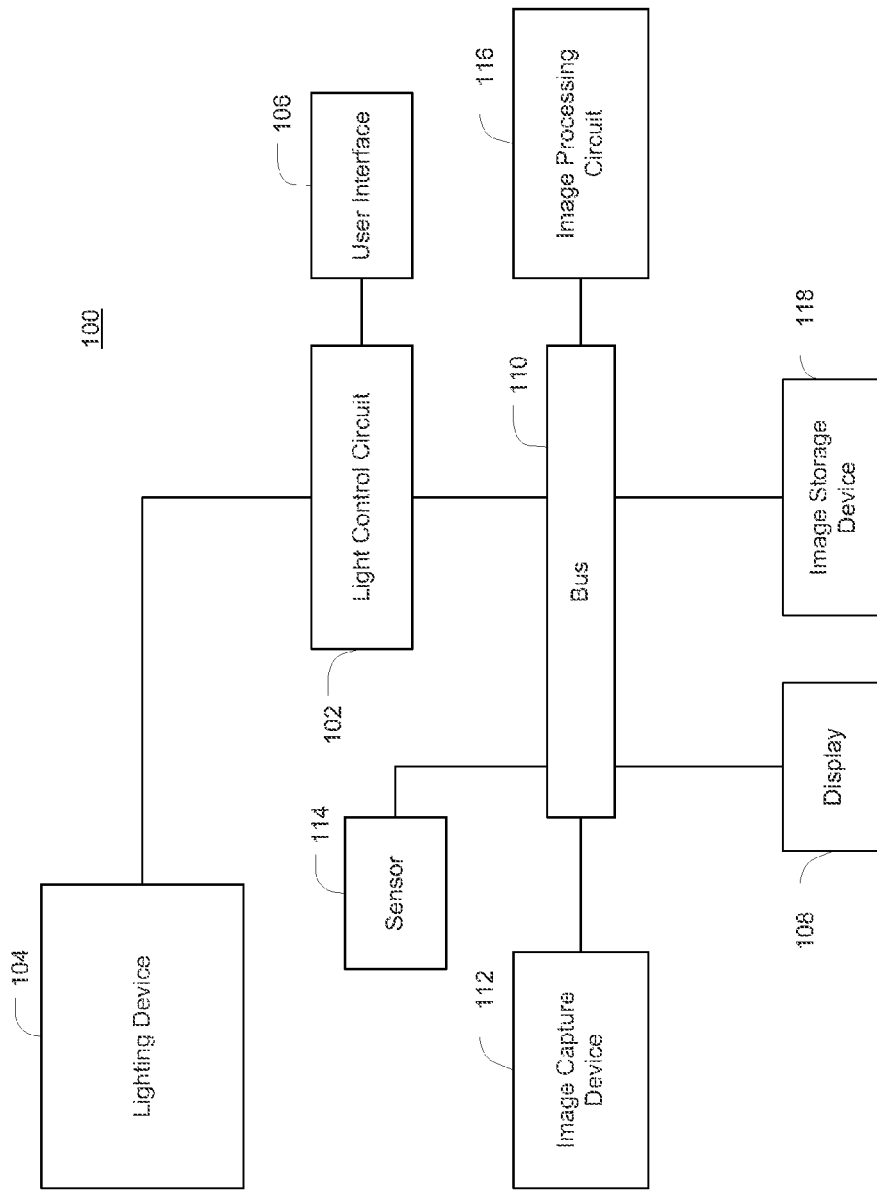


FIG. 1

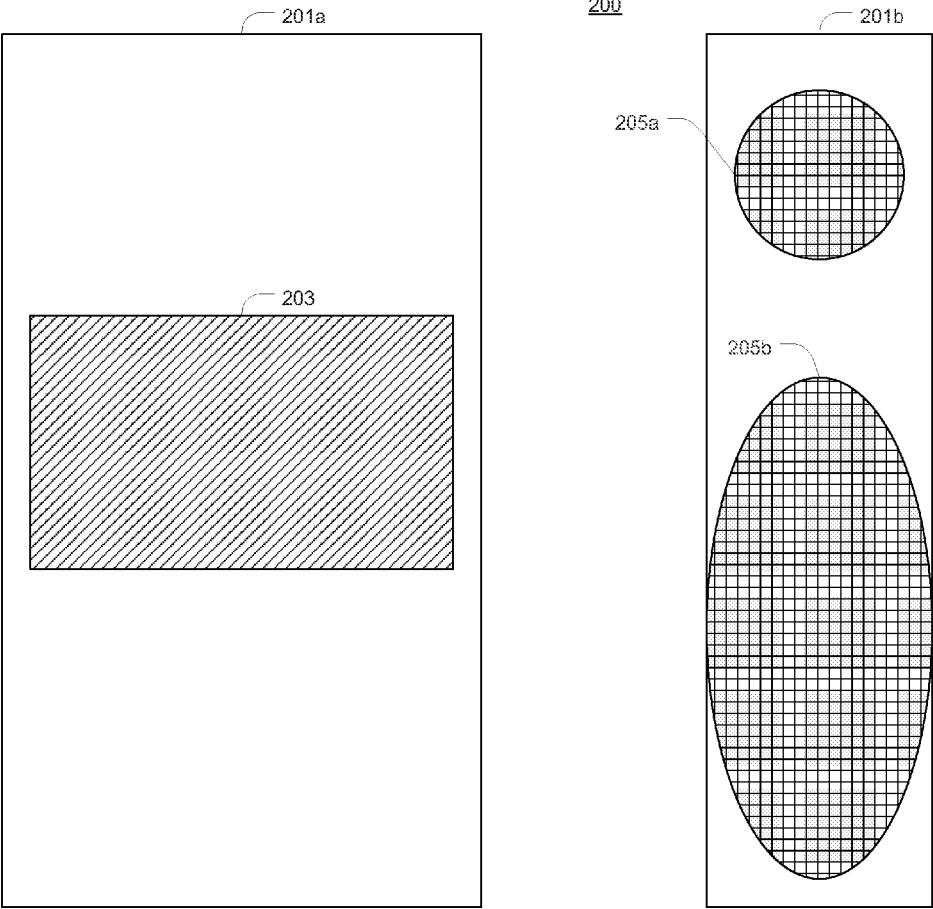


FIG. 2

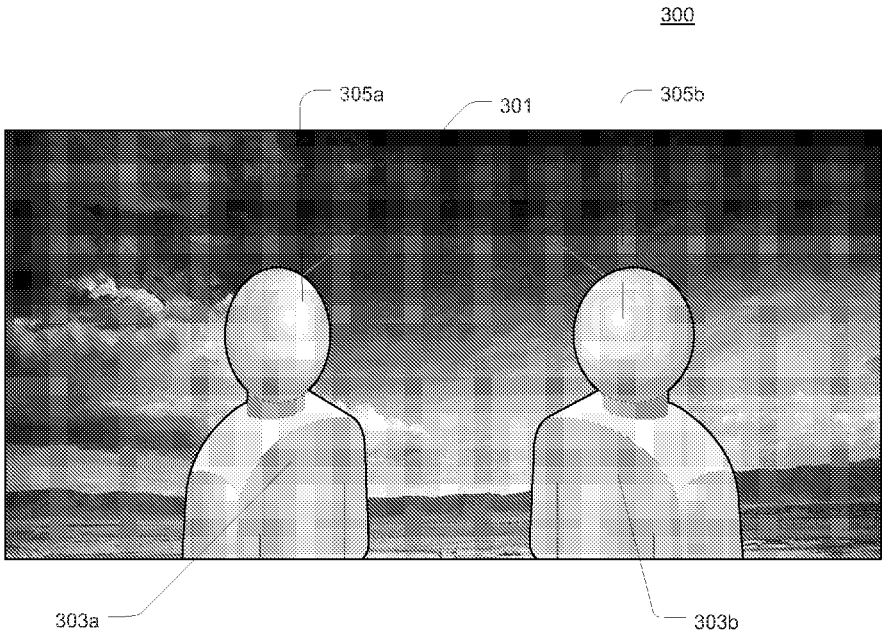


FIG. 3

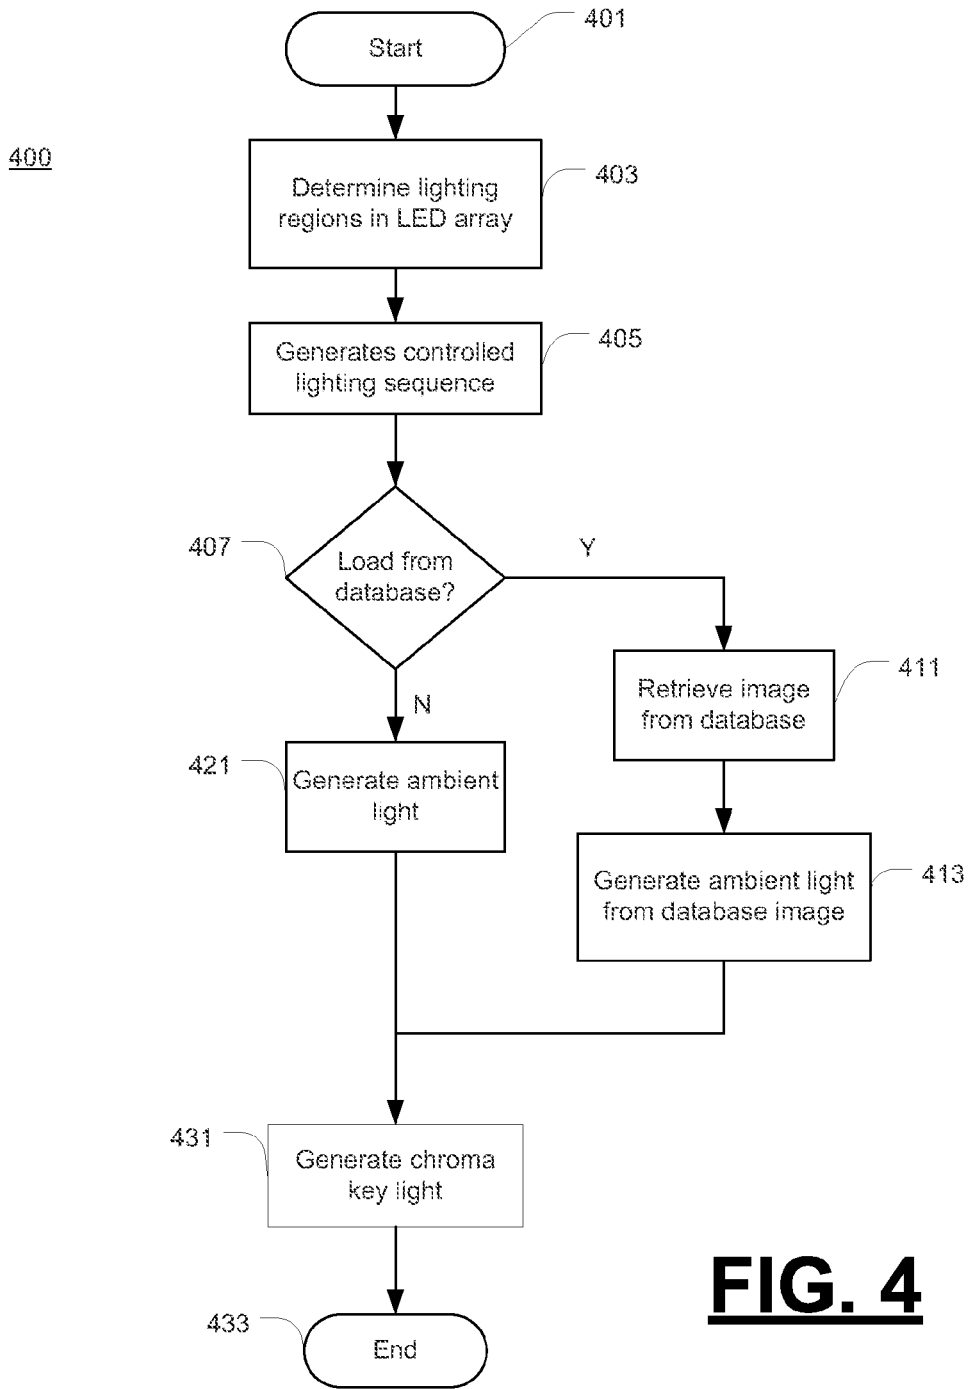


FIG. 4

CONTROL AND DISPLAY SYSTEM WITH SYNCHRONOUS DIRECT VIEW VIDEO ARRAY AND INCIDENT KEY LIGHTING

RELATED APPLICATION DATA

This application is a continuation of U.S. patent application Ser. No. 15/260,559, filed on Sep. 9, 2016, and titled "CONTROL AND DISPLAY SYSTEM WITH SYNCHRONOUS DIRECT VIEW VIDEO ARRAY AND INCIDENT KEY LIGHTING", now allowed, which application is a divisional of U.S. patent application Ser. No. 14/248,212, filed on Apr. 8, 2014, and titled "AUTOMATIC CHROMA KEY BACKGROUND GENERATOR WITH INCIDENT KEY LIGHTING." Each of these applications are incorporated herein by reference in its entirety.

FIELD OF THE INVENTION

Various exemplary embodiments disclosed herein relate generally to video production. Specifically, exemplary embodiments relate to lighting control for video effects.

BACKGROUND

Chroma key depositing (i.e., chroma keying) is a technique used in image and video production to produce a composite image. A portion of a target image including a subject is replaced with another image; in order to ease the replacement of the portion of the target image, that portion is "keyed" with a single color that is distinguishable from the rest of the image and is replaced with the second image. During video production, a solid green or blue (to be furthest away from natural skin tone) are used as background. During post-production the background color is replaced with another background to produce the composite image.

Recently, solid matte backgrounds have been replaced with light-emitting diode (LED) array lighting systems. Some LED systems replace existing lights, such as LED-mounted spotlights or on-camera flashes. In some instances, LED arrays have also been used as background to supplement or even replace a chroma key background for a composite image. However, unless the LED array is emitting the same color as the chroma key background, the LED array must be completely out of the camera's field of vision in order for the post-production processing of the chroma key background to be effective.

In view of the foregoing, it would be desirable to incorporate LED lighting arrays in chroma key images and videos. In particular, it would be desirable to use LED lighting within a camera's field of vision in chroma key video capture.

SUMMARY OF THE DISCLOSURE

In light of the present need for controlled chroma key and incident lighting, a brief summary of various exemplary embodiments is presented. Some simplifications and omissions may be made in the following summary, which is intended to highlight and introduce some aspects of the various exemplary embodiments, but not to limit the scope of the invention. Detailed descriptions of a preferred exemplary embodiment adequate to allow those of ordinary skill in the art to make and use the inventive concepts will follow in the later sections.

Various embodiments relate to a light control apparatus for controlling a lighting device. The light control apparatus

can include a lighting device comprising a viewed portion of lights and an unviewed portion of lights and a light control circuit that controls the viewed and unviewed portion of the LED array based on a controlled lighting sequence. The controlled lighting sequence can include an ambient light profile. In various aspects, the controlled lighting sequence also includes a chroma key color profile and/or an incident light profile.

In various aspects, the lighting device can include an LED array and/or a projector. In various aspects, the light control apparatus can also include a video capture device that records a first image, wherein only the viewed portion of the lighting device is in a field of vision of the video capture device. In an aspect, the lighting device can include one or more spotlight lighting sections that displays the incident light profile.

In various aspects, the light control apparatus can also include a sensor that records light measurements, wherein the light control circuit determines the field of vision of the image capture device based on the light measurements. In various aspects, the light control apparatus can also include a user interface connected to the light control circuit that sends signals to the light control circuit to modify the controlled lighting sequence. In an aspect, the lighting control circuit generates the incident light profile based the light measurements.

In various aspects, the light control apparatus can also include an image storage device that includes at least a reference image. In various aspects, the light control apparatus can also include an image processing circuit that generates a composite image based on the first image and the reference image. In an aspect, the image storage device stores images associated with a target GPS coordinate.

In various aspects, the light control apparatus can operate such that at least the viewed portion of the lighting device displays a chroma key color and/or emit infrared light. In an aspect, only the viewed portion of the lighting device displays the chroma key color and/or emits infrared light.

In various aspects, the light control apparatus can operate such that the unviewed portion of the lighting device displays the ambient light profile. In an aspect, only the unviewed portion of the lighting device displays the ambient light profile. In various aspects, the light control apparatus can operate such that the lighting device alternates between displaying the chroma key color and/or infrared light and the ambient light profile.

It should be apparent that, in this manner, various exemplary embodiments enable automatic chroma key and incident lighting. Particularly, by controlling individual lights within an lighting device for the filming period, the apparatus enables users to capture images using both chroma key lighting and ambient and incident lighting within the same recording period.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to better understand various exemplary embodiments, reference is made to the accompanying drawings wherein:

FIG. 1 illustrates a block diagram of an exemplary light control apparatus;

FIG. 2 illustrates an exemplary light-emitting diode array;

FIG. 3 illustrates an exemplary image employing an embodiment of the light control apparatus; and

FIG. 4 illustrates a flowchart for lighting a scene using an embodiment of the light control apparatus.

DETAILED DESCRIPTION

Referring now to the drawings, in which like numerals refer to like components or steps, there are disclosed broad aspects of various exemplary embodiments.

FIG. 1 illustrates a block diagram of an exemplary light control apparatus. Light control apparatus 100 can be used, for example, in image or video production to aid a user in making composite images and/or videos. Light control apparatus 100 can include a light control circuit 102, a lighting device 104, a user interface (UI) 106, a display 108, a bus 110, an image capture device 112, a sensor 114, an image processing circuit 116, and/or an image storage device 118. In some embodiments, multiple elements can be components in a single device. For example, image capture device 112, sensor 114, and display 108 can be in a single device, such as a digital video recorder. Similarly, light control circuit 102, user interface 106, and display 108 can be included in a single device.

Light control circuit 102 can include hardware to control each light in lighting device 104. In some embodiments, light control 102 can control multiple, discrete lighting devices 104 (not shown) in concert. Light control circuit 102 can send signals to control lighting device 104 via wired or wireless connection. Light control circuit 102 can control the functioning of each light in lighting device 104 through a controlled lighting sequence, which programs light characteristics of each light in lighting device 104 over a set period. Some light characteristics include, for example, the light plot (i.e., positioning of lights in a scene), color, focus, duration, brightness, quality (e.g., hard or soft), etc. In some embodiments, light control circuit 102 can receive feedback from sensor 114 and use the feedback to set light characteristics for lighting device 104.

In some embodiments, light control circuit 102 can include software to control characteristics of individual lights or light groups within lighting device 104. For example, light control circuit 102 can treat a light group as a skeuomorphic “spotlight”, with the light group within lighting device 104 treated as a single entity with all the light characteristics of the group being controlled in tandem. In some embodiments, a user can select individual lights within lighting device 104 to control through light control circuit 102.

During operation, light control circuit 102 can receive a controlled lighting sequence either through user interface 106, or from image storage device 118 (e.g., database, video recording device, hard drive, etc.) via bus 110 and can use the controlled lighting sequence to control each light in lighting device 104 during a set period. In some embodiments, light control circuit 102 can generate and/or modify the controlled light sequence. The controlled lighting sequence can include one or more lighting profiles, such as a chroma key profile, an ambient light profile, and/or an incident light profile. The controlled lighting sequence can, for example, set and modify light characteristics of specific lights or light groups during filming to mimic different landscapes and can help light a subject correctly while the subject moves within the scene. For example, the viewed portion can display a chroma key profile, the unviewed portion can generally display an ambient light profile, while specific light groups in the unviewed portion can display an incident light profile. In some embodiments, light control circuit 102 receives feedback from one or more sensors 114

and can change light characteristics of one or more lights based on the received feedback.

In some embodiments, light control circuit 102 can determine the viewed and unviewed sections of lighting device 104. For example, light control circuit 102 can receive signals from one or more sensors 114 that can be used to determine the field of vision of image capture device 112. In such instances, light control circuit 102 can set the viewed section of lighting device 104 to correspond with only the lights that are in the field of vision of image capture device 112. Light control circuit 102 can also set all the lights outside of the field of vision of image capture device 112 as the unviewed section of lighting device 104. Light control circuit 102 can set specific light characteristics for specific sections of lighting device 104. For example, light control circuit 102 can set the viewed section of lighting device 104 to display a monochromatic, chroma key color, such as green or blue, while setting the unviewed section of lighting device 104 to display programmed ambient light or incident light, such as simulating sunlight through moving cloud cover.

In some embodiments, light control circuit 102 can change light characteristics of lighting device 104 based on image capture device 112. For example, if image capture device 112 is a film camera shooting at 48 frames per second (fps), light control circuit 102 can alternate characteristics of all lights in lighting device 104 between a chroma key color and a plurality of colors to simulate ambient light. When light control circuit 102 changes the lights this way, half of the filmed frames are filmed when lighting device 104 is displaying the chroma key color, while the other half of the scenes are filmed using the ambient light profile stored in the controlled lighting sequence (thus lighting the subjects using simulated ambient light). This enables a user to generate a composite image using ambient light on the subject, as the user can use the chroma key images to insert a new background in the chroma-keyed images while using the ambient light images to light the subject using the correct lighting profile. In some embodiments, light control circuit 102 can use genlocking to synchronize image capture device 112 and lighting device 104.

In some embodiments, light control circuit 102 can generate a controlled lighting sequence based on images it receives. In some embodiments, light control circuit 102 can receive one or more high-resolution images via bus 110 from image storage device 118 and can generate light characteristics for lighting device 104 to emulate the profile of the received images. For example, light control circuit 102 can receive images of a harvest moon sky and a moon-lit ground. Light control circuit 102 can generate a controlled lighting profile for sections of lighting device 104 such that lights in lighting device 104 above the subject emulate the sky, while lights in lighting device 104 below the subject emulate the ground.

In some embodiments, a user can modify the generated profile to control individual lights or light groups. For example, a user can edit the controlled lighting profile to change the color, intensity, and/or focus of the light to better light a subject in a simulated night scene. In some embodiments, light control circuit 102 can control lighting device 104 such that it does not emit the chroma key color. In such embodiments, light control circuit 102 can control lighting device 104 to specifically light a subject. For example, sensor 114 can detect shadow areas or other lighting issues within the viewed portion of image capture device 112. Light control circuit 102 can then use the data received from

sensor **114** via bus **110** to drive individual lights or light groups within lighting device **104** to address the lighting issue.

Lighting device **104** can include one or more lights that are controlled and driven by light control circuit **102**. Each light in lighting device **104** can receive a control signal from light control circuit **102** and emits light based on the received control signal. In some instances, the control signal can alter the light over a set period and can change light characteristics like color and intensity and can control whether the light is on or off (e.g., “strobe effect”).

In some embodiments, lighting device **104** can comprise an array of light-emitting diodes (i.e., an “LED array”). The LEDs, such as red-green-blue (RGB) or red-green-blue-white (RGB+W)-type LEDs, can be used in conjunction with other LEDs in a group to display multiple colors at a high resolution, depending on the resolution of LED array **104**. In some embodiments, the LED array **104** can also include infrared LEDs. Light control circuit **102** can control the LED array **104** such that only those infrared LEDs within the viewed portion emit infrared light. In such instances, in lieu of the viewed portion emitting a chroma key color, image processing circuit **106** can use the detected infrared region to replace the background. When this occurs, the other RGB or RGB+W LEDs within the viewed portion can emit the ambient light.

In some embodiments, lighting device **104** can comprise a projector. In such embodiments, projector **104** can emit light onto one or more screens placed between projector **104** and image capture device **112**. In such instances, light control device **102** can drive images that are projected through projector **104** onto one or more screens. In some embodiments, projector **104** emits a chroma key color within the viewed portion of image capture device **112**. In some embodiments, projector **104** can include an infrared filter. In such instances, projector **104** can, in lieu of projecting a chroma key color, project infrared light only within the viewed portion of image capture device **112**.

In some embodiments, lighting device **104** can comprise multiple groups of lights. For example, lighting device **104** can comprise six walls of lights surrounding a subject. Light control circuit **102** can control each of the six discrete walls separately. In some embodiments, light control circuit **102** can control smaller groups of lights or individual lights within a light group. For example, light control circuit **102** can control a group of lights on a “front wall” light group as a skeuomorphic front spotlight.

User interface (UI) **104** can include hardware and/or software that communicates between the user and light control circuit **102**. In some embodiments, UI **104** can be a graphic user interface (GUI) that can display graphical representations of lighting device **104** and/or the frame being filmed by image capture device **112**. In some embodiments, UI **106** and display **108** can be used by the user to generate and/or modify a controlled lighting sequence to be sent by light control circuit **102** to control light characteristics for one or more lights in lighting device **104**. In some embodiments, the UI displays light groups within lighting device **104** as skeuomorphic lights within a light plot. A user can use UI **106** software to control such light groups like a single piece of lighting equipment. In some embodiments, UI **106** includes physical controls used to control one or more lights through light control circuit **102**.

Display **108** can be a monitor that receives signals via bus from other devices in light control apparatus **100**, such as image capture device **112**, image processing circuit **116**, UI **106**, image storage device **118**, and/or light control device

102, and displays an image based on the received signal. In some embodiments, light control apparatus **100** can include multiple displays **108**, such as discrete displays for image capture device **112** and image processing device **116**, respectively. Display **108** can be a liquid-crystal display (LCD) monitor or other digital display.

Bus **110** can be a line bus that facilitates communications between multiple devices in light control apparatus **100**. In some embodiments, all devices controlled via bus **110** are in the same device. In some embodiments, devices in light control apparatus **100** can communicate wirelessly; in such instances, bus **110** can be replaced with a wireless communications apparatus.

Image capture device **112** can comprise, for example, a still camera or video camera that captures images or video lit by lighting device **104**. In some embodiments, image capture device **112** can be within lighting device **104**. For example, when lighting device **104** includes six walls of lights, image capture device can be within the six light walls with the subject.

In some embodiments, one or more sensors **114** can be included with image capture device **112** to determine the field of vision of image capture device **112**. In such instances, sensor **114** in image capture device **112** can send a signal to light control circuit **102** that it then uses to set a viewed portion of lighting device **104**. In some embodiments, image capture device **112** can send its characteristics (e.g., aperture, shutter speed, video frame rate, view angle, etc.) to light control circuit **102**, which light control circuit **102** can use to generate or modify a controlled lighting sequence for lighting device **104**.

Sensor **114** can be, for example, one or more internal sensors inside of image capture device **112** or light control circuit **102**, or one or more external sensors positioned relative to image capture device **112** and lighting device **104**. Sensor **114** can be, for example, a visible light sensor, infrared light sensor, and/or gyroscope that can be used to determine the field of vision of image capture device **102**. In some embodiments, sensor **114** can be used to determine other quantitative measurements, such as light intensity, light temperature, room temperature, etc.

Measurements made by sensor **114** can be used by other devices in light control apparatus **100** to calibrate the controlled lighting sequence. In some embodiments, measurements made by sensor **114** can be used in maintenance and troubleshooting, such as when the light temperature is excessively high. In some embodiments, sensors **114** can be used to determine lighting issues within the visible portion of image capture device **112**, such as detecting shadow areas on a subject. One or more sensors **114** can send the lighting data to light control circuit **102**, which can change light characteristics of individual lights within lighting device **104** to change the detected shadow areas.

Image processing circuit **116** can include hardware to generate a composite image based on one or more images captured by image capture device **112**. In some embodiments, image processing circuit **116** can generate a composite image based on an image received from image capture device **112** and an image retrieved from image storage device **118**. In some embodiments, image processing circuit **116** can include software and/or a user interface (not shown) to enable a user to generate a composite image. In some embodiments, image processing circuit **116** generates the composite image in real time, receiving images from image capture device **112** as they are recorded. In some embodiments, image processing circuit **116** generates the composite image after all images were recording, retrieving both the

images recorded by image capture device 112 using lighting device 104 and other images from image storage device 118.

In some embodiments, generation of a composite image is aided based on the lighting device 104. For example, image capture device 112 can record an image with a chroma key background (e.g., the viewed portion of lighting device 104) while the subject is lit with ambient light. Image processing circuit 116 can retrieve another image (in some instances, from image storage device 118) and can replace the chroma key color in the recorded image of image capture device 112 with the other, retrieved image to generate the composite image. In such instances, the subject in the composite image is lit with ambient light even though chroma keying was used to replace the background in the image.

In some embodiments, image processing circuit 116 can merge two images recorded by image capture device 112. For example, the controlled lighting sequence drives lighting device 104 such that it alternates between displaying a chroma key color for half of the recorded frames and displaying ambient light for the remaining half of recorded frames. Image processing circuit 116 can merge consecutive images together through a process like genlocking such that the composite image is lit with ambient light even though chroma keying was used to enable image processing circuit 116 to replace the background in the image.

Image storage device 118 can be one or more databases, hard drives, video recording devices, and/or other media storage devices that store information for other devices in light control apparatus 100. In some embodiments, image storage device 118 stores images and/or video that light control circuit 102 uses as a reference when generating a controlled lighting sequence, such that lighting device 104 emulates playback of the stored image or video. For example, a user can upload high-resolution photographs and/or video to image storage device 118. Light control circuit 102 can then use the stored images and/or videos to generate a controlled lighting program for playback through lighting device 104 as ambient light emulating the stored media.

In some embodiments, users can download reference images onto image storage device 118 based on entered global positioning system (GPS) coordinates. For example, a user can enter coordinates {36.115369, -115.172761} and {36.121852, -115.171816} to retrieve multiple images between the two coordinates representing "The Strip" in Las Vegas. Multiple images and/or video can be stored in image storage device 118. Light control circuit 102 can then retrieve the stored images and/or videos to generate a controlled lighting program for playback through lighting device 104 as ambient light emulating the stored media.

In some embodiments, image storage device 118 stores the images recorded by image capture device 112 and/or composite images generated by image processing circuit 116. In such instances, image storage device 118 can also store the original images used by image processing unit 116 to generate the composite images.

FIG. 2 illustrates an exemplary lighting device. Lighting device 200 includes light wall sections 201a-b, viewed light portion 203, and programmed light sections 205a, 205b. In some embodiments, lighting device 200 can also include other wall sections (not shown) to surround a subject when capturing and image or video. For example, lighting device can include back wall portion 201a, front wall portion 201b positioned next to image capture device 112, a ceiling portion (not shown) above wall portions 201a-b, a ground portion (not shown), and image capture device 112.

Viewed light portion 203 is the portion of lighting device 200 that is in the field of vision of image capture device 112. In some embodiments, sensor 114 can make measurements that image capture device 112 and/or light control circuit 102 use to determine viewed portion 203 within lighting device 200. In some embodiments, image capture device 112 and/or light control circuit 102 can determine changes in the field of vision of image capture device 112 and modify the lights included in viewed portion 203. In some embodiments, light control circuit 102 can specifically control viewed portion 203 relative to lighting device 200 such that all the lights in viewed portion 203 display a chroma key color, while all other lights in lighting device 200 display ambient light based on an ambient light profile included in the controlled light sequence.

Programmed light sections 205a, b can be sections of lights within lighting device 104 that are specifically controlled by light control circuit 102 as a group. For example, light section 205a can be controlled together as a skeuomorphic spotlight and light section 205a can be controlled together as a specific geometric shape. In some embodiments, light section 205a can be as small as a single light or LED.

Users can control light section 205a, b within lighting device 200 to employ greater lighting control beyond a programmed light sequence based on a reference background image by using light sections to generate incident light on objects within the frame. For example, a user can add a light plot to the controlled lighting sequence and can control light characteristics of each skeuomorphic light within the light plot. When using the light plot, a controlled light sequence can be programmed such that for lighting device 200, all lights that are not in viewed section 203 or light sections 205a-b are displaying a programmed sequence of ambient light, viewed section 203 is displaying a chroma key color, and light sections 205a-b are displaying white lights to emulate spotlights. Image capture device 112 can then capture an image that specifically lights a subject in accordance with artistic lighting conventions, while also lighting the subject and other objects with appropriate ambient light and having a chroma key background light for post-production editing to create a composite image.

FIG. 3 illustrates an exemplary image employing an embodiment of the light control apparatus. Composite image 300 can be generated, for example, by image processing circuit 116 based on a background image stored in image storage device 118 and a recorded image of subjects using lighting device 104 and image capture device 112. Composite image 300 includes a background image 301, subjects 303a, b and specific subject lighting 305a, b.

Background image 301 can be, for example, an image replaced by image processing circuit 116 during post-production to replace a chroma key color background 203 generated by lighting device 104, 200. In some embodiments, background image 301 can be a high-resolution image displayed by lighting device 104 during specific frames of a controlled lighting sequence driven by light control circuit 102. For example, projector 104, 200 can display a high-resolution image or video onto wall portion 201a, with the viewed portion 203 being captured as background image 301.

Subjects 303a, b can be between light wall 201a and image capture device 112 during recording and can be subject to reflections of light made by all lights in lighting device 200. In some instances, subjects 303a, b can reflect light based on the display of lights in lighting device 200.

The subject reflection **305a, b** can be reflections of ambient light displayed by lighting device **104**, such as non-viewed portions of lighting device **104** and skeuomorphic spotlights **205a, b**. In some embodiments, subject reflections **305 a, b** can be initial shadow areas detected by sensor **114**. Light control circuit **102** can generate an incident lighting profile within the controlled lighting sequence that controls one or more lights in lighting device **104** to address the detected shadow region. In some embodiments, subject reflections **305a, b** are captured in one frame, while a chroma-keyed image is captured in another frame. Image processing circuit **116** can merge the two frames to produce a composite image **300** that replaces the chroma key background with background **301** while maintaining the subject reflections **305a, b** from the ambient light frame.

FIG. 4 illustrates a flowchart for lighting a scene using an embodiment of the light control apparatus. Light control apparatus **100** or light control circuit **102** can employ method **400** to generate a controlled light sequence and control lighting device **104, 200** when recording an image or video for later post-production editing. Method **400** can start at step **401** and proceed to step **403**, where light control circuit **102** can determine lighting regions in lighting device **104, 200**. In some embodiments, the lighting regions include viewed portion **203** and/or light sections **205a, b** that comprise a light plot within lighting device **104, 200**. In some embodiments, specific lighting regions may change over the period of the controlled lighting sequence, such as when image capture device **112** moves during recording period. In such instances, light control circuit **102** determines the specific lights included within each lighting region over each step (i.e., "route") and set the lighting regions for each frame to be filmed over the set period.

Once the lighting regions for lighting device **104, 200** are set, light control circuit **102** can then proceed to step **405**, where it generates a controlled lighting sequence. In some embodiments, light control circuit **102** can receive instructions from the user via UI **106** when producing the controlled lighting sequence. The controlled lighting sequence can include, for example, light characteristics for ambient light (i.e., "ambient light profile"), chroma key lighting settings, light sections for a light plot, skeuomorphic light settings, and other lighting characteristic settings for each light over every frame in the set period.

After generating the controlled lighting sequence, light control circuit in step **102** can proceed to step **407**, where it determines whether to load images or video from DB **118**. In some embodiments, light control circuit **102** can generate or modify the ambient light profile to represent a route generated from reference images or photographs, such as images saved in DB **118** or a set or sequence of GPS coordinates with associated landscape images stored by a third-party. If light control device **102** determines to load an image from DB **118** or from GPS coordinates, it proceeds to step **411**, where it retrieves an image from DB **118**. In some embodiments, light control device **102** retrieves images from a third-party database, such as a database of images based on GPS coordinates.

After retrieving the image, light control circuit in step **413** can drive the lighting device **104, 200** to generate ambient light based on the loaded image. Light control circuit can, for example, control lighting device **104, 200** to display ambient light in the unviewed portions of lighting device **104, 200**. In some embodiments, the loaded image modifies the controlled lighting sequence generated in step **405**.

If, in step **407**, light control circuit **102** determines not to load an image from a database, it proceeds to step **421**,

where it drives lighting device **104, 200** to generate ambient light. In instances where light control circuit **102** does not generate ambient light based on a stored image, light control circuit **102** can generate ambient light, for example, based on the controlled lighting sequence generated in step **405**.

After either step **413** or **421**, light control circuit can proceed to step **431**, where it drives lighting device **104, 200** to generate a chroma key light. In some embodiments, the chroma key light generated is only for viewed portion **203** of lighting device **104, 200**. In some embodiments, light control circuit **201** drives lighting device **104, 200** to alternate between displaying the ambient light generated in step **413** and the chroma key light generated in step **431**. Once the chroma key light is generated, light control circuit **102** can proceed to step **433** to end method **400**.

It should be apparent from the foregoing description that various exemplary embodiments of the invention may be implemented in hardware and/or firmware. Furthermore, various exemplary embodiments may be implemented as instructions stored on a machine-readable storage medium, which may be read and executed by at least one processor to perform the operations described in detail herein. A machine-readable storage medium may include any mechanism for storing information in a form readable by a machine, such as a personal or laptop computer, a server, or other computing device. Thus, a machine-readable storage medium may include read-only memory (ROM), random-access memory (RAM), magnetic disk storage media, optical storage media, flash-memory devices, and similar storage media.

It should be appreciated by those skilled in the art that any block diagrams herein represent conceptual views of illustrative circuitry embodying the principals of the invention. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudo code, and the like represent various processes which may be substantially represented in machine readable media and so executed by a computer or processor, whether or not such computer or processor is explicitly shown.

Although the various exemplary embodiments have been described in detail with particular reference to certain exemplary aspects thereof, it should be understood that the invention is capable of other embodiments and its details are capable of modifications in various obvious respects. As is readily apparent to those skilled in the art, variations and modifications can be affected while remaining within the spirit and scope of the invention. Accordingly, the foregoing disclosure, description, and figures are for illustrative purposes only and do not in any way limit the invention, which is defined only by the claims.

What is claimed is:

1. A method of controlling a video display, comprising:
 - receiving a signal from a sensor operably connected to a video capture device;
 - determining a field of vision of the video capture device based on the signal;
 - determining a viewed portion of the video display that is within the field of vision of the video capture device;
 - determining an unviewed portion of the video display that is not within the field of vision of the video capture device; and
 - controlling the video display to emit light in the viewed portion according to a viewed portion profile and emit light in the unviewed portion according to at least one of an ambient light profile and an incident light profile.

11

2. The method of claim 1, further comprising:
detecting a change in the field of vision of the video
capture device; and
changing one or both of a size and location of one or both
of the viewed portion and the unviewed portion of the
video display based on the change in the field of vision.
3. The method of claim 1, wherein the signal is at least one
of a video capture device aperture setting signal, a shutter
speed signal, a video frame rate signal, a view angle signal,
a movement signal, or a location signal.
4. The method of claim 1, wherein the sensor is a light
sensor and the signal is based on light measurements.
5. The method of claim 1, wherein the controlling the
video display to emit light in the unviewed portion includes
controlling the video display to emit light in the unviewed
portion to create ambient lighting in a scene recorded by the
video capture device that emulates an ambient source.
6. The method of claim 1, wherein the viewed portion
profile includes at least one of a chroma key color and video.
7. The method of claim 1, further comprising controlling
the video display to alternate between at least two of
displaying infrared light, a chroma key color, and video.
8. The method of claim 7, wherein the alternating occurs
over two or more sequential frames captured by the video
capture device in a single recording session.
9. The method of claim 1, further comprising synchronizing
the viewed portion profile and the ambient light
profile and/or the an incident light profile.
10. The method of claim 1, further comprising receiving
a light measurement signal from a light sensor and generat-
ing an incident light profile based on the light measure-
ment signal.
11. The method of claim 1, further comprising:
receiving a light measurement signal from a light sensor;
detecting, using the light measurement signal, shadow
areas within the field of vision of the video capture
device; and
changing light characteristics of the video display to
change or eliminate the detected shadow areas.
12. The method of claim 1, wherein at least one of the
viewed portion profile and the ambient light profile is
reference images or video stored in association with corre-
sponding global positioning system coordinates.
13. The method of claim 1, wherein at least one of the
viewed portion profile, ambient light profile or incident light
profile is a controlled video or computer-generated sequence
generated as a function of at least two sets of global
positioning system coordinates associated with a route and
corresponding respective reference images or video.
14. A non-transitory machine-readable storage medium
containing machine-readable instructions configured to
cause a processor of a display system to perform operations
comprising:
receiving a signal from a sensor operably connected to a
video capture device;
determining a field of vision of the video capture device
based on the signal;
determining a viewed portion of a video display that is
within the field of vision of the video capture device;
determining an unviewed portion of the video display that
is not within the field of vision of the video capture
device; and
controlling the video display to emit light in the viewed
portion according to a viewed portion profile and emit
light in the unviewed portion according to at least one
of an ambient light profile and an incident light profile.

12

15. The non-transitory machine-readable storage medium
of claim 14, wherein the controlling the video display to
emit light in the unviewed portion includes controlling the
video display to emit light in the unviewed portion to create
ambient lighting in a scene recorded by the video capture
device that emulates an ambient source.
16. The non-transitory machine-readable storage medium
of claim 14, the operations further comprising synchronizing
the viewed portion profile and the ambient light profile
and/or the incident light profile.
17. The non-transitory machine-readable storage medium
of claim 14, wherein at least one of the viewed portion
profile and the ambient light profile is reference images or
video stored in association with corresponding global posi-
tioning system coordinates.
18. The non-transitory machine-readable storage medium
of claim 14, wherein at least one of the viewed portion
profile, ambient light profile or incident light profile is a
controlled video or computer-generated sequence generated
as a function of at least two sets of global positioning system
coordinates associated with a route and corresponding
respective reference images or video.
19. The method of claim 1, wherein controlling the video
display to emit light in the viewed portion includes display-
ing video.
20. The method of claim 1, wherein controlling the video
display to emit light in the unviewed portion includes
displaying video.
21. A method of controlling a video display, comprising:
receiving a signal from a sensor operably connected to a
video capture device;
determining a field of vision of the video capture device
based on the signal;
determining a viewed portion of the video display that is
within the field of vision of the video capture device;
determining an unviewed portion of the video display that
is not within the field of vision of the video capture
device; and
controlling the video display to display images according
to a first video or lighting signal in the viewed portion
and display images according to a second video or
lighting signal that is different than the first video or
lighting signal in the unviewed portion.
22. The method of claim 21, further comprising:
detecting a change in the field of vision of the video
capture device; and
changing one or both of a size and location of one or both
of the viewed portion and the unviewed portion of the
video display based on the change in the field of vision.
23. The method of claim 21, wherein the signal is at least
one of a video capture device aperture setting signal, a
shutter speed signal, a video frame rate signal, a view angle
signal, a movement signal, a location signal, or a light sensor
signal.
24. The method of claim 21, further comprising control-
ling the video display to alternate between at least two of
displaying infrared light, a chroma key color, and video.
25. The method of claim 21, further comprising synchro-
nizing the first video or lighting signal and the second video
or lighting signal.
26. The method of claim 21, wherein at least one of the
first video or lighting signal and the second video or lighting
signal is reference images or video stored in association with
corresponding global positioning system coordinates.

13

27. A non-transitory machine-readable storage medium containing machine-readable instructions configured to cause a processor of a display system to perform operations comprising:

- receiving a signal from a sensor operably connected to a video capture device;
- determining a field of vision of the video capture device based on the signal;
- determining a viewed portion of a video display that is within the field of vision of the video capture device;
- determining an unviewed portion of the video display that is not within the field of vision of the video capture device; and
- controlling the video display to display images according to a first video or lighting signal in the viewed portion and display images according to a second video or lighting signal that is different than the first video or lighting signal in the unviewed portion.

28. The non-transitory machine-readable storage medium of claim 27, further comprising:
detecting a change in the field of vision of the video capture device; and

14

changing one or both of a size and location of one or both of the viewed portion and the unviewed portion of the video display based on the change in the field of vision.

29. The non-transitory machine-readable storage medium of claim 27, wherein the signal is at least one of a video capture device aperture setting signal, a shutter speed signal, a video frame rate signal, a view angle signal, a movement signal, a location signal, or a light sensor signal.

30. The non-transitory machine-readable storage medium of claim 27, further comprising controlling the video display to alternate between at least two of displaying infrared light, a chroma key color, and video.

31. The non-transitory machine-readable storage medium of claim 27, further comprising synchronizing the first video or lighting signal and the second video or lighting signal.

32. The non-transitory machine-readable storage medium of claim 27, wherein at least one of the first video or lighting signal and the second video or lighting signal is reference images or video stored in association with corresponding global positioning system coordinates.

* * * * *