



US007719195B2

(12) **United States Patent**
DeVincentis et al.

(10) **Patent No.:** **US 7,719,195 B2**
(45) **Date of Patent:** **May 18, 2010**

(54) **PLASMA LAMP WITH
FIELD-CONCENTRATING ANTENNA**

(75) Inventors: **Marc DeVincentis**, Palo Alto, CA (US);
Richard Gilliard, Morgan Hill, CA
(US)

(73) Assignee: **Luxim Corporation**, Sunnyvale, CA
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 465 days.

(21) Appl. No.: **11/619,989**

(22) Filed: **Jan. 4, 2007**

(65) **Prior Publication Data**

US 2007/0222352 A1 Sep. 27, 2007

Related U.S. Application Data

(60) Provisional application No. 60/756,087, filed on Jan.
4, 2006.

(51) **Int. Cl.**
H01J 65/04 (2006.01)

(52) **U.S. Cl.** **315/39**; 315/248; 313/634

(58) **Field of Classification Search** 315/39,
315/248; 313/231, 634, 636
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,787,705 A 1/1974 Bolin et al.
3,826,950 A 7/1974 Hruda et al.
4,001,631 A 1/1977 McNeill et al.
4,206,387 A 6/1980 Kramer et al.
4,485,332 A 11/1984 Ury et al.
4,498,029 A * 2/1985 Yoshizawa et al. 315/39

4,633,140 A 12/1986 Lynch et al.
RE32,626 E 3/1988 Yoshizawa et al.
4,749,915 A 6/1988 Lynch et al.
4,795,658 A 1/1989 Kano et al.
4,887,192 A 12/1989 Simpson et al.
4,950,059 A 8/1990 Roberts
4,975,625 A 12/1990 Lynch et al.

(Continued)

FOREIGN PATENT DOCUMENTS

JP 8148127 6/1996

(Continued)

OTHER PUBLICATIONS

“Chapter 4—Cavity Resonators, Army Technical Manual, TM11-
673—Generation and Transmission of Microwave Energy”, (Jun.
1953), 12 pgs.

(Continued)

Primary Examiner—David Hung Vu


Assistant Examiner—Tung X Le

(74) *Attorney, Agent, or Firm*—Schwegman, Lundberg &
Woessner, P.A.

(57) **ABSTRACT**

An electrodeless plasma lamp is described comprising a lamp
body including a solid dielectric material. The lamp includes
a bulb received at least partially within an opening in the solid
dielectric material and a radio frequency (RF) feed config-
ured to provide power to the solid dielectric material. A con-
ductive material is provided adjacent to the bulb to concen-
trate the power proximate the bulb. The conductive material
may be located below an upper surface of the solid dielectric
material. The conductive material may modify at least a por-
tion of an electric field proximate the bulb so that the portion
of the electric field is oriented substantially parallel to an
upper surface of the lamp body.

79 Claims, 10 Drawing Sheets

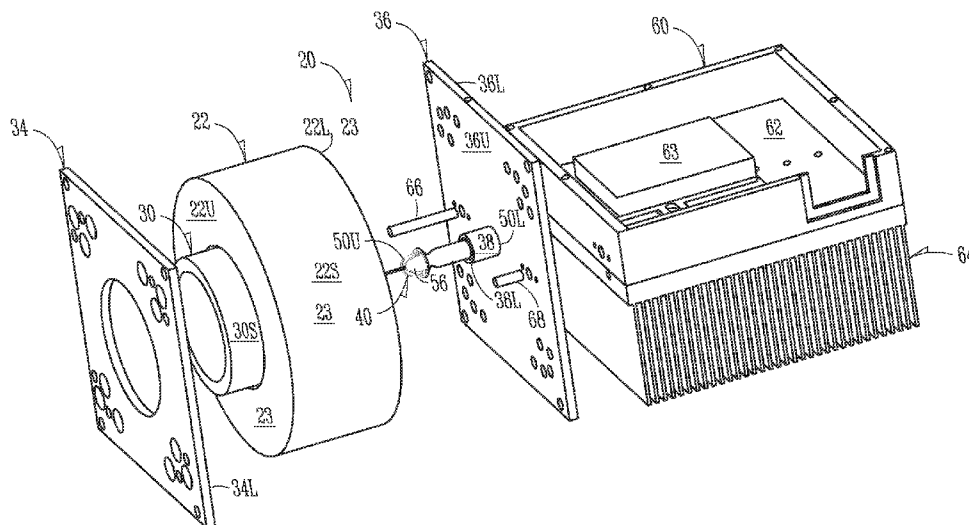

U.S. PATENT DOCUMENTS

4,978,891	A	12/1990	Ury	
5,039,903	A	8/1991	Farrall	
5,070,277	A	12/1991	Lapatovich	
5,072,157	A	12/1991	Greb et al.	
5,084,801	A	1/1992	El-Hamamsy et al.	
5,086,258	A	2/1992	Mucklejohn et al.	
5,113,121	A *	5/1992	Lapatovich et al.	315/248
5,361,274	A	11/1994	Simpson et al.	
5,438,242	A	8/1995	Simpson	
5,448,135	A	9/1995	Simpson	
5,498,937	A	3/1996	Korber et al.	
5,525,865	A *	6/1996	Simpson	315/39
5,594,303	A	1/1997	Simpson et al.	
5,786,667	A	7/1998	Simpson et al.	
5,910,710	A	6/1999	Simpson	
5,910,754	A	6/1999	Simpson et al.	
5,923,116	A	7/1999	Mercer et al.	
6,020,800	A	2/2000	Arakawa et al.	
6,031,333	A	2/2000	Simpson	
6,049,170	A	4/2000	Hochi et al.	
6,137,237	A	10/2000	MacLennan et al.	
6,246,160	B1	6/2001	MacLennan et al.	
6,252,346	B1	6/2001	Turner et al.	
6,265,813	B1	7/2001	Knox et al.	
6,291,936	B1 *	9/2001	MacLennan et al.	315/39
6,313,587	B1	11/2001	MacLennan et al.	
6,424,099	B1	7/2002	Kirkpatrick et al.	
6,518,703	B1 *	2/2003	Hochi et al.	315/39
6,566,817	B2	5/2003	Lapatovich	
6,617,806	B2 *	9/2003	Kirkpatrick et al.	315/248
6,621,195	B2	9/2003	Fuji et al.	
6,666,739	B2	12/2003	Pothoven et al.	
6,737,809	B2	5/2004	Espiau et al.	
6,856,092	B2	2/2005	Pothoven et al.	
6,922,021	B2	7/2005	Espiau et al.	
7,012,489	B2	3/2006	Sherrer et al.	
7,034,464	B1	4/2006	Izadian et al.	
7,291,985	B2	11/2007	Espiau et al.	
7,348,732	B2 *	3/2008	Espiau et al.	315/39
7,358,678	B2	4/2008	Espiau et al.	
7,362,054	B2 *	4/2008	Espiau et al.	315/39
7,362,055	B2	4/2008	Espiau et al.	
7,362,056	B2	4/2008	Espiau et al.	
7,372,209	B2	5/2008	Espiau et al.	
7,391,158	B2	6/2008	Espiau et al.	
7,429,818	B2	9/2008	Chang et al.	
2001/0035720	A1	11/2001	Guthrie et al.	
2002/0105274	A1 *	8/2002	Pothoven et al.	313/634
2002/0180356	A1	12/2002	Kirkpatrick et al.	
2003/0193299	A1 *	10/2003	Choi et al.	315/248
2005/0212456	A1	9/2005	Espiau et al.	
2005/0286263	A1	12/2005	Champion et al.	
2006/0250090	A9	11/2006	Guthrie et al.	
2007/0109069	A1	5/2007	Espiau et al.	
2007/0171006	A1	7/2007	DeVincentis	
2007/0211991	A1	9/2007	Espiau et al.	
2007/0217732	A1	9/2007	Chang et al.	
2007/0236127	A1	10/2007	DeVincentis et al.	
2008/0054813	A1	3/2008	Espiau et al.	
2008/0203922	A1 *	8/2008	Guthrie et al.	313/635
2008/0211971	A1	9/2008	Pradhan	

FOREIGN PATENT DOCUMENTS

KR	1020050018587	A	2/2005
WO	WO-2006070190		7/2006
WO	WO-2006129102		12/2006

WO WO-2007138276 12/2007

OTHER PUBLICATIONS

“International Application Serial No. PCT/US2007/060110, Search Report mailed Feb. 25, 2008”, 3 pgs.

“International Application Serial No. PCT/US2007/060110, Written Opinion mailed Feb. 25, 2008”, 5 pgs.

Espiau, F. M., et al., “Plasma Lamp”, U.S. Appl. No. 60/022,028, filed Jul. 31, 2000, 28 pgs.

Guthrie, C., et al., “A Corrugated Wave-Guide Used for the Excitation of an Electrode-Less Metal Halide Plasma Lamp Incorporating a Solid Dielectric Material”, U.S. Appl. No. 60/224,060, filed Aug. 9, 2000, 9 pgs.

Guthrie, C., et al., “A Method for Connecting the Antenna on a Printed Wiring Board to a Wave-Guide in a Light Source in Which an Electrode-Less Lamp is Built Into the Wave-Guide Structure”, U.S. Appl. No. 60/224,061, filed Aug. 9, 2000, 9 pgs.

Guthrie, C., “D.R.I. Drawings—Wave Guide Lamp Concept 8 (WGC008); Wave Guide Lamp Concept 9 (WGC009); and Wave Guide Lamp Concept 10 (WGC010)”, *Guthrie Exhibit 2173, Board of Patent Appeals and Interferences (Interference No. 105,393)*, (Jun. 28, 2000), 3 pgs.

Guthrie, Charles, et al., “Electrodeless Incandescent Bulb”, U.S. Appl. No. 60/639,857, filed Dec. 27, 2004, and Don Wilson, 16 pgs. Guthrie, Charles, “Lamp”, U.S. Appl. No. 60/687,458, filed Jun. 6, 2005, 12 pgs.

Guthrie, Charles, et al., “Lamp”, U.S. Appl. No. 60/687,280, filed Jun. 3, 2005, and Neate, 17 pgs.

Inventors Not Listed, “Lamp”, International Application Serial No. PCT GB2007 001935, International filing date May 24, 2007, GB Application Serial No. 0610580.3, filed May 30, 2006.

Izadian, J. S., et al., “Generating Light From Electromagnetic Energy”, U.S. Appl. No. 60/337,057, filed Nov. 6, 2001, 120 pgs.

Pozar, D. M., “Section 5.8, Tapered Lines”, *In: Microwave Engineering, 3rd Edition, 2005 (John Wiley & Sons, Inc.)*, (2005), 9 pgs.

Pozar, D. M., “Section 6.4, Circular Waveguide Cavities”, *in: Microwave Engineering, 3rd Edition, 2005 (John Wiley & Sons, Inc.)*, (2005), 8 pgs.

Prior, G., et al., “Quartz Bulb Enclosed in a Wave-Guide”, U.S. Appl. No. 60/234,415, filed Sep. 21, 2000, 5 pgs.

Prior, G., et al., “Wave-Guide Used for the Excitation of an Electrode-Less Metal Halide Plasma Lamp Incorporating a Solid Dielectric Material”, U.S. Appl. No. 60/224,059, filed Aug. 9, 2000, 7 pgs.

Prior, G., et al., “Wave-Guide Used for the Excitation of an Electrode-Less Metal Halide Plasma Lamp Incorporating a Solid Dielectric Material”, U.S. Appl. No. 60/224,298, filed Aug. 10, 2000, 5 pgs.

Sandberg, E., et al., “A Mechanical Means of Sealing the Window to an Electrode-Less Metal Halide Bulb That is Integrated Into a Waveguide”, U.S. Appl. No. 60/262,536, filed Jan. 17, 2001, 6 pgs.

Sandberg, E., “An Improved Drive Circuit for an Electrode-Less Plasma Lamp That is Embedded in a Waveguide”, U.S. Appl. No. 60/241,198, filed Oct. 17, 2000, 7 pgs.

Sandberg, E., “Light Source for Use in Microdisplay Based Light Engines”, U.S. Appl. No. 60/192,731, filed Mar. 27, 2000, 31 pgs.

Smoler, D., “E-Mail to C. Guthrie re: Ridged Waveguide Ideas”, (Jun. 27, 2000), 2 pgs.

Wharmby, D. O., “Chapter 11—Electrodeless Lamps”, *In: Lamps & Lighting, 4th Edition, 1997 (Arnold & John Wiley & Sons, Inc.)*, (1997), 13 pgs.

Wharmby, D. O., “Electrodeless Lamps for Lighting: A Review”, *IEEE Proceedings-A*, vol. 140 (6), (Nov. 1993), 9 pgs.

Wilson, D., et al., “Use of a Coating to Prevent the Reduction of Ceramic to Elemental Metal in the Bulb of a Wave-Guide Lamp”, U.S. Appl. No. 60/224,866, filed Aug. 11, 2000, 3 pgs.

Wilson, D., et al., “Electrode-Less Metal Halide Plasma Lamp With Integrated Electronics”, U.S. Appl. No. 60/224,290, filed Aug. 10, 2000, 9 pgs.

Wilson, D., et al., “High Temperature, Low Cost Window Sealing Technique for Plasma Lamps”, U.S. Appl. No. 60/224,291, filed Aug. 10, 2000, 5 pgs.

Wilson, D., et al., "Light Source Consisting of an Electrode-Less Metal Halide Plasma Bulb That is Integrated Into a Wave-Guide", U.S. Appl. No. 60/224,289, filed Aug. 10, 2000, 6 pgs.

Wilson, D., et al., "Means to Reduce EMI in a Wave-Guide", U.S. Appl. No. 60/224,503, filed Aug. 10, 2000, 20 pgs.

Wilson, D., et al., "R.F. Wave-Guide Into Which an Insert of a Hermetic Material That Has Been Either Molded or Plasma Deposited", U.S. Appl. No. 60/224,257, filed Aug. 10, 2000, 5 pgs.

Wilson, D., et al., "Use of a Heat Sink in a Plasma Light Source (Located Between a Wave Guide That Incorporates the Bulb and the

Drive Electronics", U.S. Appl. No. 60/224,961, filed Aug. 11, 2000, 6 pgs.

Wilson, D., et al., "Use of a Heat Sink in a Plasma Light Source (Located Externally and Surrounding the Lamp Assembly)", U.S. Appl. No. 60/224,617, filed Aug. 11, 2000, 20 pgs.

"Chapter 6.3—Rectangular Waveguide Cavities", in: *Microwave Engineering*, Pozar, D. M., Editor (John Wiley & Sons, Inc.), (Jul. 1997), pp. 313-318.

* cited by examiner

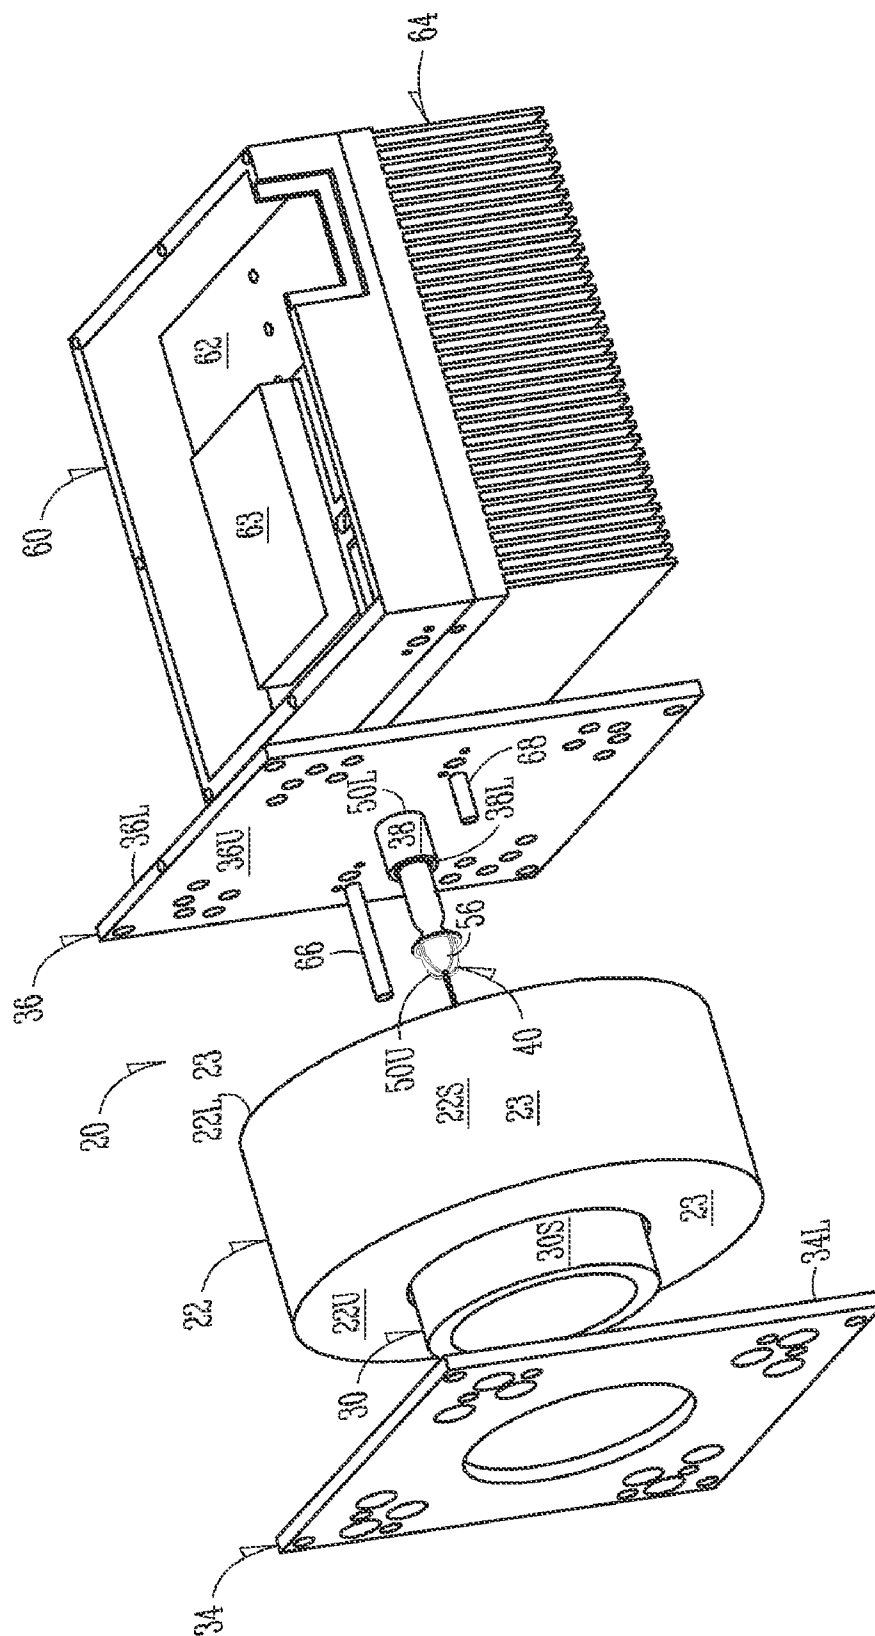


FIG. 1

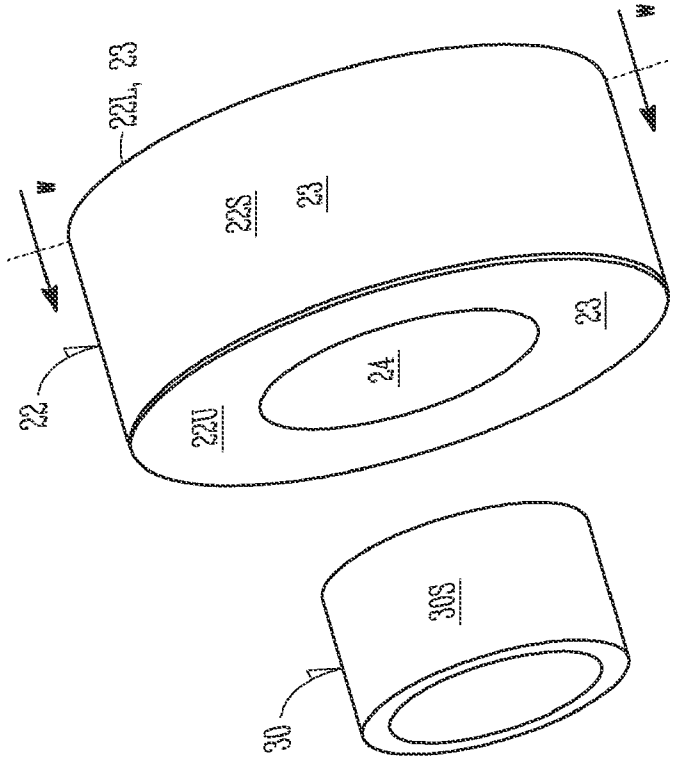


FIG. 2

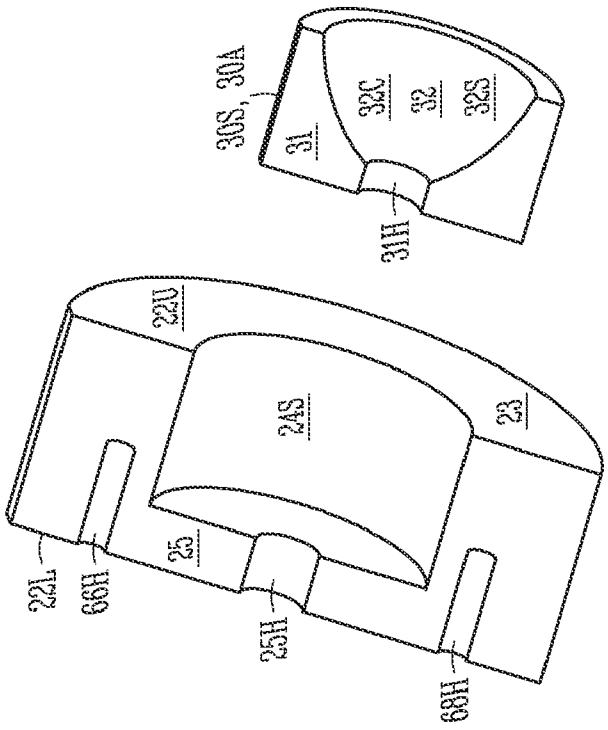


FIG. 3

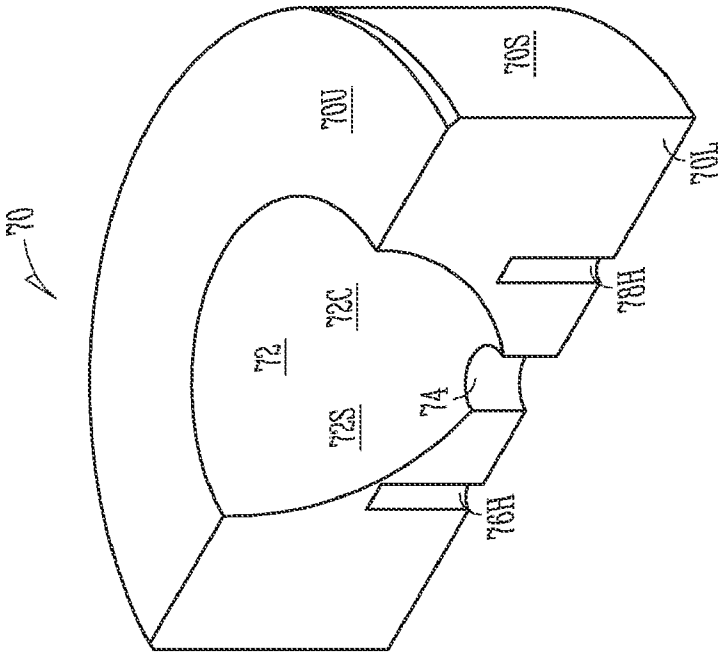


FIG. 4

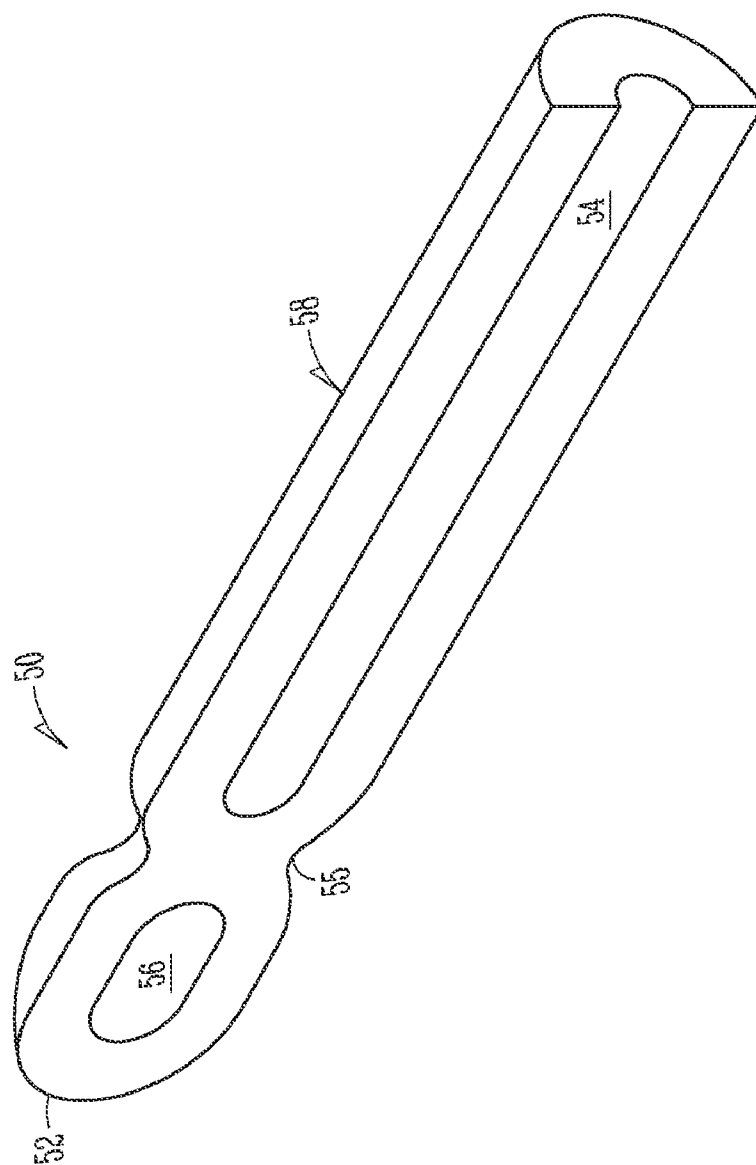


FIG. 5

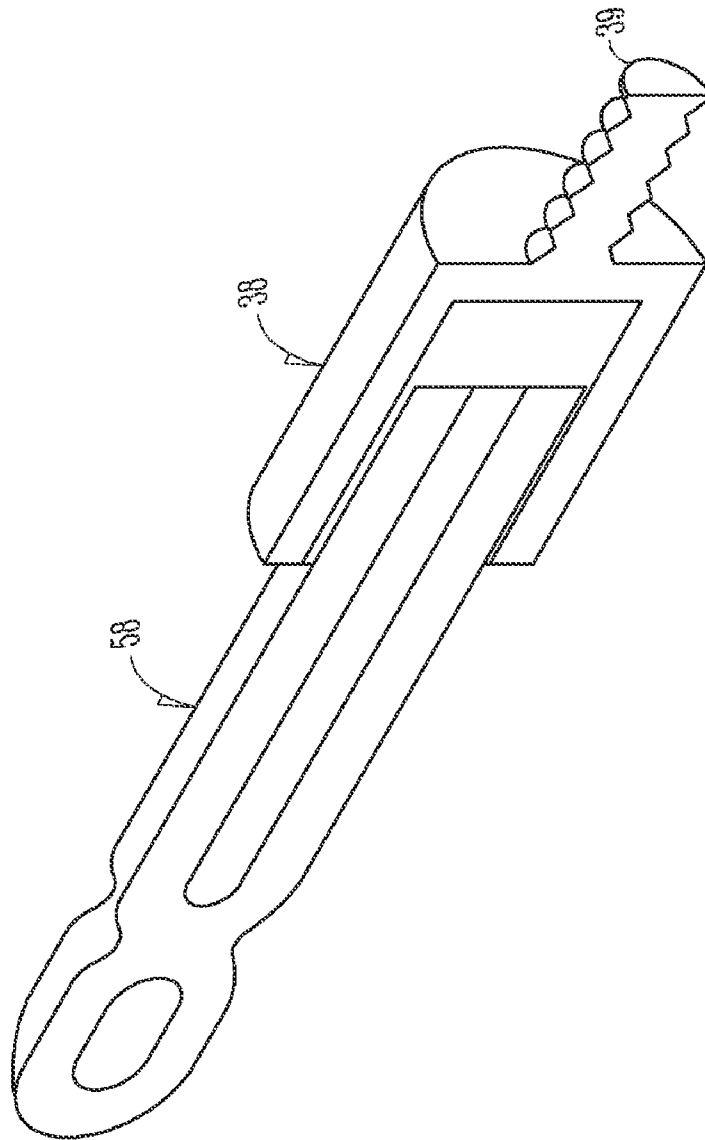


FIG. 6

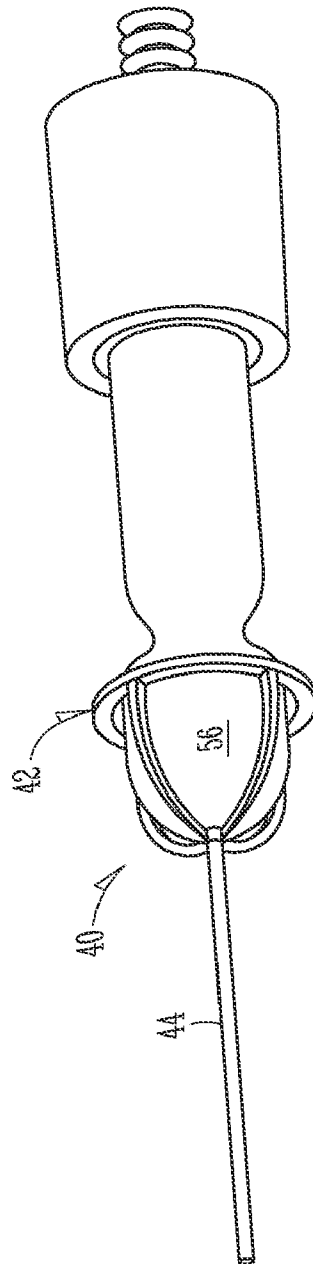


FIG. 7

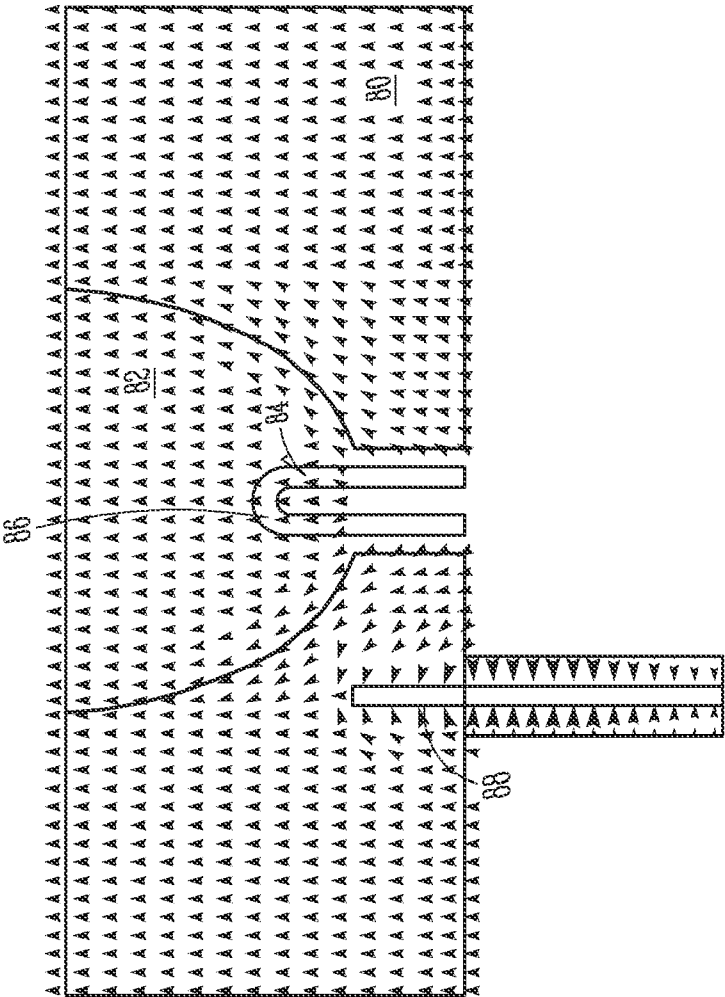


FIG. 8

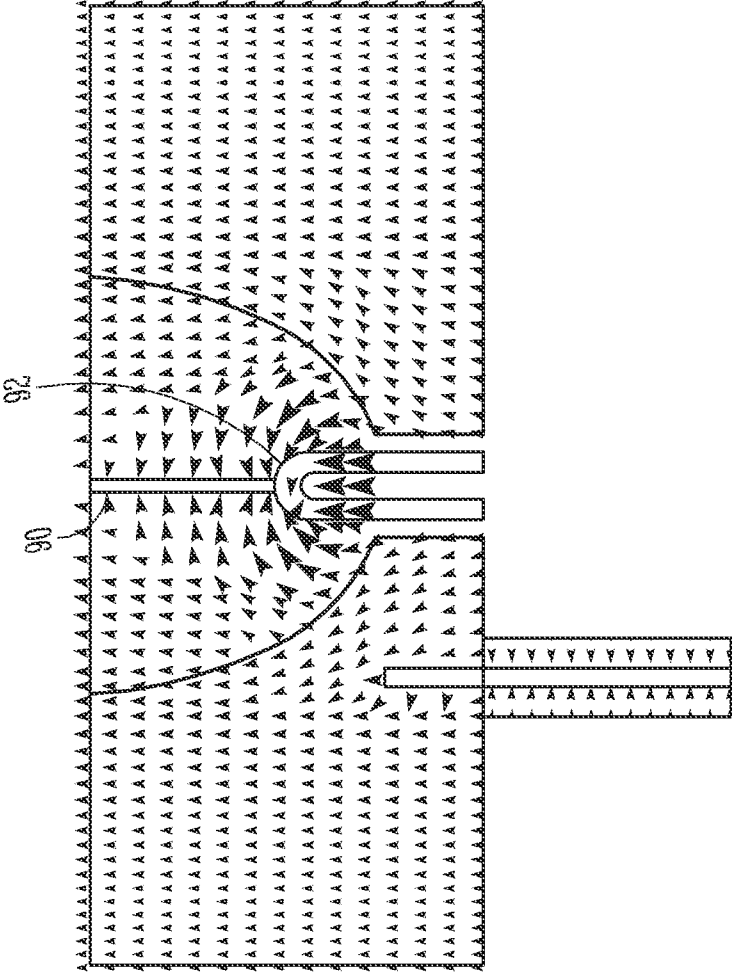


FIG. 9

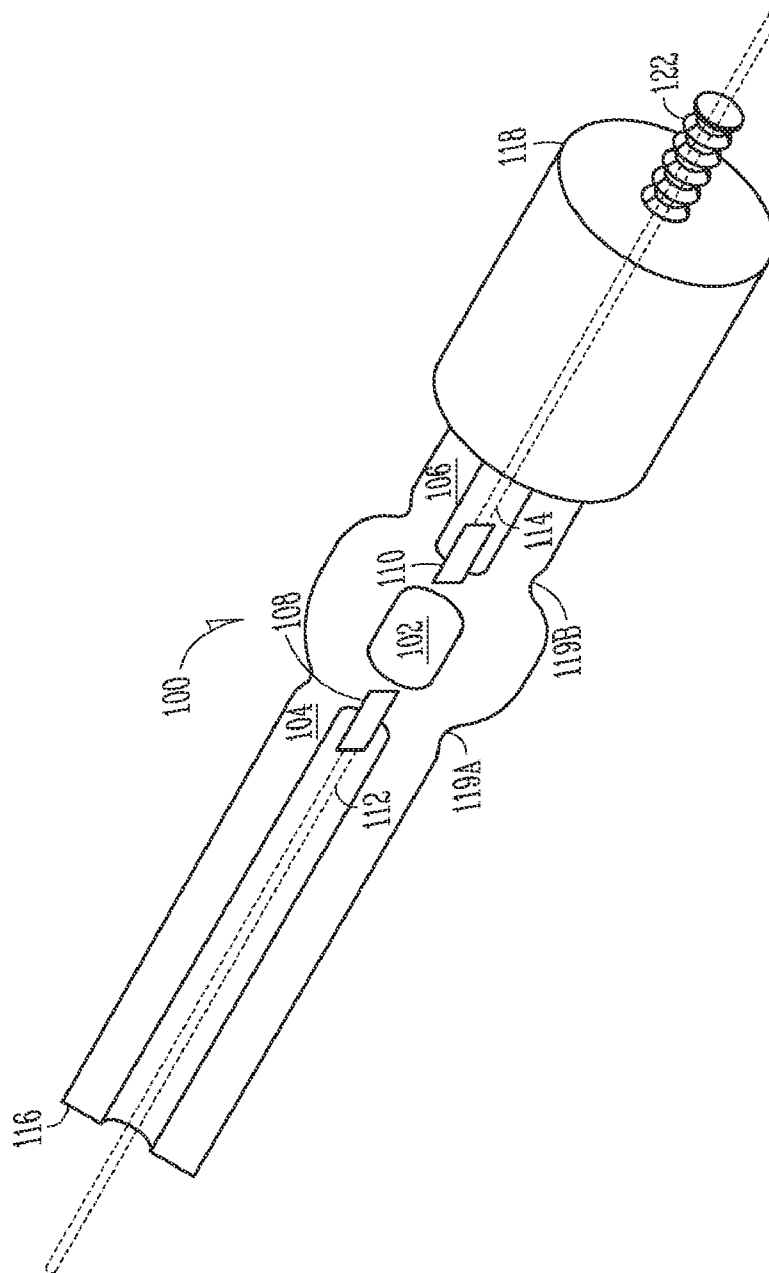


FIG. 10

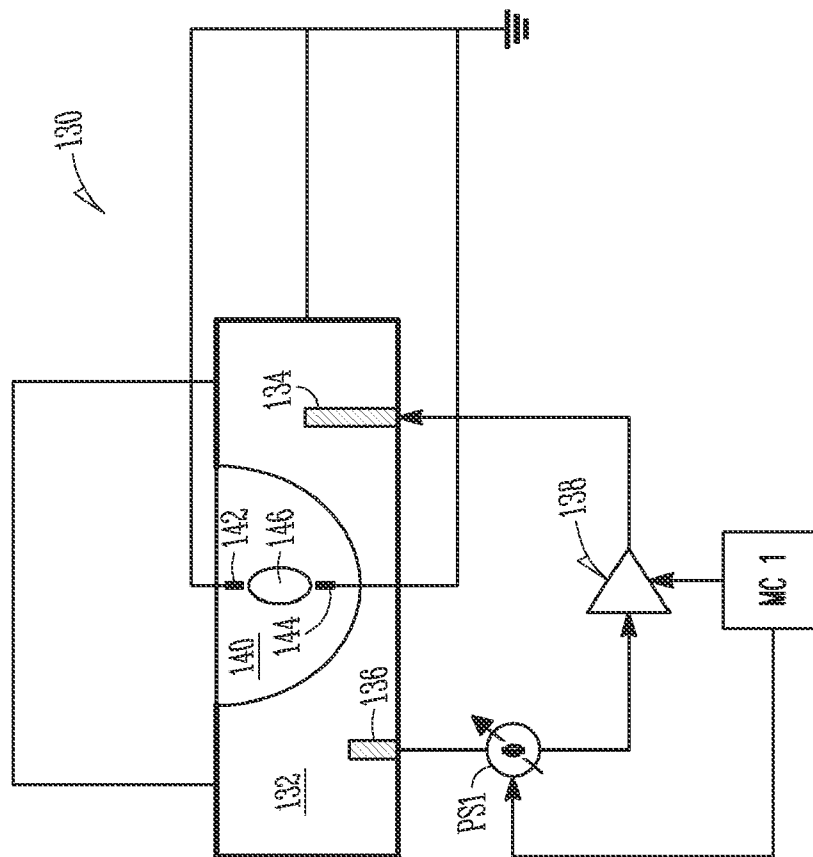


FIG. 11

1

PLASMA LAMP WITH FIELD-CONCENTRATING ANTENNA

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims benefit of priority to U.S. Provisional Application No. 60/756,087, filed on Jan. 4, 2006 entitled "PLASMA LAMP WITH FIELD-CONCENTRATING ANTENNA AND IMPROVED BULB, AND METHOD THEREFOR", the entire contents of which are incorporated herein by reference.

FIELD

The field of the present invention relates to devices and methods for generating light, and more particularly to electrodeless plasma lamps.

BACKGROUND

Electrodeless lamps may be used to provide point-like, bright, white light sources. Because electrodes are not used, they may have longer useful lifetimes than other lamps. Some plasma lamps direct microwave energy into an air cavity, with the air cavity enclosing a bulb containing a mixture of substances that can ignite, form a plasma, and emit light. However, for many applications, light sources that are brighter, smaller, less expensive, more reliable, and have longer lifetimes are desired.

Plasma lamps have been proposed that use a dielectric waveguide body to reduce the size of the lamp. An amplifier circuit may be used to provide power to the waveguide body to excite a plasma in a bulb positioned within a lamp chamber in the waveguide body.

What is desired are lamps with improved brightness and efficiency which can serve as a light source in products such as large-screen television sets and digital light processing projection systems. What is also desired are improved methods for production of plasma lamps, including manufacture of key components and overall lamp assembly.

INCORPORATION BY REFERENCE

All publications and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication or patent was specifically and individually indicated to be incorporated by reference.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features of the invention are set forth with particularity in the appended claims. A better understanding of the present invention will be obtained by reference to the following detailed description that sets forth illustrative embodiments, in which the principles of the invention are utilized, and the accompanying drawings of which:

FIG. 1 shows a partially exploded perspective view of a plasma lamp according to an example embodiment including a cylindrical dielectric waveguide body, a dielectric sleeve insert forming a lamp chamber with a light-reflecting paraboloidal surface, a bulb assembly with a tipless bulb, and a field-concentrating antenna.

FIG. 2 is an exploded perspective view of the FIG. 1 waveguide body and sleeve.

FIG. 3 is a sectional view of the FIG. 2 waveguide body and sleeve, taken along line 3-3.

FIG. 4 is a sectional view of a one-piece cylindrical dielectric waveguide body having a lamp chamber with a light-reflecting paraboloidal surface.

FIG. 5 is a sectional view of the FIG. 1 bulb assembly according to an example embodiment.

FIG. 6 is a sectional view of the FIG. 1 bulb assembly bonded to a metallic holder.

FIG. 7 is a detail perspective view of the FIG. 1 field-concentrating antenna and bulb assembly, and FIG. 6 metallic holder.

FIG. 8 graphically shows the spatial distribution and intensity of the electric field in the FIG. 1 waveguide body and lamp chamber in the absence of the field-concentrating antenna, for a resonant frequency of 878 MHz.

FIG. 9 graphically shows the spatial distribution and intensity of the electric field in the FIG. 1 waveguide body and lamp chamber with the field-concentrating antenna, for a resonant frequency of 878 MHz.

FIG. 10 is a perspective view of a bulb embodiment wherein two field-concentrating antenna elements are integrated within a quartz bulb assembly.

FIG. 11 schematically shows an electric circuit for a plasma lamp having a FIG. 10 bulb assembly.

DETAILED DESCRIPTION

While the present invention is open to various modifications and alternative constructions, the embodiments shown in the drawings will be described herein in detail. It is to be understood, however, there is no intention to limit the invention to the particular forms disclosed. On the contrary, it is intended that the invention cover all modifications, equivalences and alternative constructions falling within the spirit and scope of the invention as described herein and as expressed in the appended claims.

As shown in FIG. 11, an example embodiment provides a plasma lamp with a waveguide body 132 comprising a dielectric material. In the example embodiment of FIG. 11, the waveguide body is configured to resonate when power is provided to the waveguide body at a particular frequency. By operating at or near a resonant frequency, power builds in the waveguide body and can be used to ignite and sustain a plasma discharge in a bulb 146 adjacent to the waveguide body 132. Electromagnetically, the waveguide body acts as a resonant cavity in this example. In example embodiments, the waveguide body may be configured to resonate in a fundamental mode, a second order mode, third order mode or other resonant mode.

The size of the waveguide body required to achieve resonance at a desired frequency generally scales inversely with the square root of the dielectric constant of the material used. As a result, materials with a higher dielectric constant may be used to reduce the size of the lamp. In an example embodiment, the waveguide body 132 has a dielectric constant greater than 1, which is the dielectric constant of air. For example, alumina, a ceramic having a dielectric constant of about 9, may be used. In some embodiments, the dielectric material may have a dielectric constant in the range of from 2 to 10 or any range subsumed therein, or a dielectric constant in the range from 2 to 20 or any range subsumed therein, or a dielectric constant in the range from 2 to 100 or any range subsumed therein, or an even higher dielectric constant. In some embodiments, the waveguide body may include more

than one such dielectric material resulting in an effective dielectric constant for the body within any of the ranges described above.

In this example embodiment, the waveguide body forms a lamp chamber **140** with a tapered wall that reflects light out of the lamp chamber. In some embodiments, the wall may taper to a vertex and form a shape having a focal point in the lamp chamber. For example, the lamp chamber **140** may have a paraboloidal or ellipsoidal shape. The walls of the lamp chamber may comprise a reflective dielectric materials (such as alumina) and/or be coated with a reflective coating such as a thin film, multi-layer dielectric coating. In this example, the reflective surface is not made from a conductive material that would prevent or substantially attenuate the transmission of power from the waveguide body **132** into the lamp chamber **140**. In one example embodiment, a thin film, multi-layer dielectric coating of multiple layers of silicon dioxide (SiO₂) may be used. Another example embodiment uses layers of titanium dioxide (TiO₂). Typically, coatings used in the present invention have approximately 10 to 100 layers with each layer having a thickness in a range between 0.1 micron and 10 microns or any range subsumed therein.

In example embodiments, a bulb **146** is positioned completely or partially in the lamp chamber. The bulb contains a fill that forms a plasma and emits light when power is provided from the waveguide body to the bulb. The light is reflected from the walls of the lamp chamber **140** out the front of the lamp. The position of the bulb and the shape of the lamp chamber may be selected to provide desired ray divergence out the front of the lamp. In example embodiments, the bulb may be positioned above the vertex of the lamp chamber such that the arc formed in the bulb is near the focal point of the lamp chamber. In example embodiments, the rays exiting the lamp chamber may be convergent, parallel or have some other ray divergence that matches an optical system used with the lamp. For instance, an optical system with lenses, reflectors and/or light pipes may be used in a projection display system to provide light from the light source to a spatial light modulator (SLM). In an example embodiment, the position of the bulb and the shape of the lamp chamber may match the ray divergence required by the optical system used with the lamp (e.g., the optical system for a projection display). The surface shape may be optimized for the desired ray divergence using commercial ray-tracing software, taking into account the finite emission volume of the plasma in the bulb, geometric constraints imposed by the bulb support structure, and constraints imposed by manufacturing processes. Suitable software products include ZEMAX^(TM), available from Zemax Development Corporation of San Diego, Calif., and CODE-V^(TM), available from Optical Research Associates of Pasadena, Calif. In example embodiments, the lamp chamber may provide a reflective surface that approximates a paraboloidal or ellipsoidal shape and the center of the bulb may be positioned at or near a focal point for the particular shape. In example embodiments, the arc length of the plasma is relatively small and the arc may be centered at the focal point of the reflective lamp chamber.

In the example shown in FIG. **11**, the bulb **146** may be positioned completely inside the lamp chamber **140** and may be at or near a focal point of the lamp chamber. In some alternative embodiments, a portion of the bulb could be in contact with the walls of the waveguide body or another material to act as a heatsink. Also, in alternative embodiments, the end of the bulb could extend outside of the lamp chamber to isolate it from the region of highest plasma intensity. However, the example embodiment in FIG. **11** uses a bulb positioned completely in the lamp chamber and spaced

from the reflective walls of the waveguide in order to provide high brightness and desired reflection/ray divergence. In example embodiments, the power is provided along the entire length of the bulb, so the arc length of the bulb is determined primarily by the size of the bulb. The bulb has a relatively short inner length and small volume to provide a small arc length and high power density. In example embodiments, the arc length may be in the range of from 2 mm to 10 mm or any range subsumed therein. The bulb also has relatively thick walls to withstand exposure to the plasma environment. In an example embodiment, the top and bottom of the bulb have a hemisphere shape with a central cylindrical section connecting the two ends. In a particular example, the bulb may have an inner width of about 3 mm, an inner length of about 5 mm, a volume of about 23.55 mm³ and a wall width of about 3.5 mm.

Other bulb configurations may be used in other embodiments. For example, the bulb may be cylindrical with a planar top and bottom or hemisphere top and bottom; or the bulb may be spherical; or the bulb may have an oval cross section with curved top and bottom surfaces. These shapes are examples only and other shapes may be used as well such as parabolically contoured bulbs or irregularly shaped bulbs (e.g., hourglass shaped bulbs).

Each of the above bulbs has a length L between the inside walls of the bulb and an outer length OL. Each of the bulbs also has a width W between the inside walls of the bulb and an outer width OW. In bulbs with circular cross sections, the width W is equal to the inner diameter of the bulb and the outer width OW is equal to the outer diameter of the bulb. In a spherical bulb, the length and width are both equal to the diameter. For irregular shaped bulbs, the inner width may be determined by using the largest interior width in the region where power is predominantly coupled into the bulb and the inner length may be determined using the greatest length between distal ends of the bulb.

In example embodiments, the bulb may be in any of the above shapes or other shapes and have, for example, an outer width OW in a range between 2 and 35 mm or any range subsumed therein, an inner width W in a range between 1 and 25 or any range subsumed therein, a wall thickness in a range between 0.5 and 5 mm or any range subsumed therein, an inner length L between 3 and 20 mm or any range subsumed therein. In example embodiments, the bulb volume may be between 10.47 mm³ and 750 mm³ or any range subsumed therein. The above dimensions are examples only and bulbs with other dimensions may also be used in embodiments of the present invention.

Example bulbs in any of the above configurations may comprise an envelope of transmissive material such as quartz, sapphire or other solid dielectric. In some embodiments, the bulb envelope may be formed from a monolithic material. In other embodiments, bulbs may also be formed by a combination of materials forming an envelope. For example, a reflective body of ceramic may have an opening covered by a transmissive window of quartz, sapphire or other transmissive material. Some bulbs may also be formed in part by surfaces of the waveguide body and/or other surfaces of a lamp body. For example, a lamp chamber may be formed in the waveguide body and covered by a transmissive window of quartz, sapphire or transmissive material.

Some bulbs may be filled through a small opening that is then sealed. This can form a surface irregularity, called a "tip" or "tubulation", where the bulb is sealed. In particular, some bulbs may be filled through a side wall of the bulb and an irregular side tubulation may be formed. With high temperatures and high pressures in an electrodeless bulb, a side tubu-

5

lation that is too thin may be susceptible to failure and a side tubulation that is too thick may introduce optical distortions. Non-uniformities may also cause localized hot spots that can cause failure. For example, the pressure inside an electrodeless plasma bulb may be in the range of from 50 atmospheres to 250 atmospheres or more, or any range subsumed therein, and the temperature may be greater than 800 degrees Celsius.

In example embodiments, the bulb may be fabricated from a tube of dielectric material such as quartz using a tipless method that does not form side tubulation irregularities. The tube is sealed at one end and a fill is provided through the other end of the tube. The other end of the tube is then closed with a torch at a point about one inch longer than the desired inner length. A bulb of this type can be fabricated with a relatively thick, uniform wall to withstand the plasma environment and a relatively small interior volume to confine the plasma arc. Since the surface irregularities of a tip are avoided, more uniform heat dissipation and more uniform optical surface for light collection may be achieved. In example embodiments, this process may be used to form a relatively thick bulb wall that has a substantially uniform thickness. For example, the wall thickness may be in the range of about 2.5 mm to 5 mm or any range subsumed therein and the uniformity of the wall thickness may be within ± 5 -20% of the wall thickness or any range subsumed therein. In some example embodiments, the uniformity of the wall thickness may be within ± 0.25 mm.

The bulb may be positioned in the lamp chamber using a pedestal or other support. In one example embodiment, a tipless bulb is used and tubing below the bulb is retained to act as a support for the bulb. The support may be attached to the wall of the lamp chamber or may pass through a hole in the waveguide body and be attached to a separate support. The bulb may be positioned in the lamp chamber spaced apart from the wall of the lamp chamber and below the opening at the top of the lamp chamber. As described above, the bulb may be at or near a focal point for the lamp chamber. In some embodiments, the distance from the interior of the bulb to the bottom of the lamp chamber may range from about half the inner length of the bulb to twice the inner length of the bulb or more. In some example embodiments, this distance may range from 2 mm to 25 mm or more, or any range subsumed therein. In some embodiments, the closest distance from the interior of the bulb to the walls of the lamp chamber may also be from 2 mm to 25 mm or more, or any range subsumed therein. In some embodiments, the distance from the interior of the bulb to the top of the lamp chamber may range from about half the inner length of the bulb to three times the inner length of the bulb or more. In some example embodiments, this distance may range from 2 mm to 40 mm or more, or any range subsumed therein. In some embodiments, the focal point and position of the bulb arc is closer to the bottom vertex of the lamp chamber than to the top opening. The above dimensions are examples only and bulb configurations with other dimensions may also be used in embodiments of the present invention.

A power source, such as amplifier 138, may be coupled to the waveguide body to provide power at a frequency in the range of 50 MHz to 30 GHz or any range subsumed therein. The amplifier 138 may be coupled to a drive probe 134 to provide power to the waveguide body. The drive probe may be inserted into an opening formed in the waveguide body and may be in direct contact with the waveguide body to effectively couple power into the waveguide body. A feedback probe 136 may be coupled to the waveguide body and the amplifier to obtain feedback from the waveguide body and provide it to the amplifier. The feedback probe may be

6

inserted into an opening formed in the waveguide body and may be in direct contact with the waveguide body to effectively obtain feedback from the waveguide body.

The outer surfaces of the waveguide body 132 may be coated with a conductive material. In example embodiments, the coating may be metallic electroplating. In other embodiments, the coating may be silver paint or other metallic paint. The paint may be brushed or sprayed onto the waveguide body and may be fired or cured at high temperature. In an example embodiment, the holes where the probes are inserted are not coated with the conductive coating in order to allow power to be effectively coupled into the waveguide body and similarly the walls of the lamp chamber are not coated to allow power to be coupled from the waveguide body into the lamp chamber 140. Since the lamp chamber 140 may be substantially larger than the bulb 146 in order to provide the desired reflective properties, some embodiments may use conductive material adjacent to the bulb to concentrate radio frequency power near the bulb. As shown at 142 and 144 in FIG. 11, a conductive material may be external to the interior of the bulb, but may extend very close to the interior of the bulb. For example, the material may be about 1 mm from the interior of the bulb. In other example embodiments, this distance may range from 0.1 mm to 5 mm or any range subsumed therein. In some embodiments, this distance may be less than the thickness of the bulb wall and the conductive material may extend into the bulb wall. The conductive material acts as an antenna that concentrates power near the bulb. To avoid arcing and oxidation, the conductive material may be enclosed in a dielectric material such as quartz. In this example, the conductive material may be hermetically sealed in a dielectric material, at least in the region adjacent to the bulb where the power densities are the highest. In one example embodiment, the conductive material is a thin foil of molybdenum or other conductive material. For example, the foil may have a thickness of about 100 microns or less. In some embodiments, the foil may have a thickness of about 20 microns or less. A very thin conductive material such as molybdenum foil may be advantageous, because it can be sealed in a dielectric material such as quartz or even penetrate the bulb wall without causing damage due to thermal expansion of the conductive material inside the dielectric material. The conductive coating on the outer surface of the waveguide body 132 and the conductive antennas 142 and 144 are grounded. In example embodiments, a common ground may be provided for these elements.

In the example embodiment of FIG. 11, the waveguide body is configured to resonate when power is provided by the amplifier 138 to the drive probe at a particular frequency. However, the ignition of the plasma in the bulb and heating of the bulb and the waveguide body may cause resonant conditions to change (for example, due to changes in the load characteristics and thermal expansion of the bulb and waveguide body). The feedback adjusts to changing lamp conditions to sustain oscillation. A phase-shifter PS1 may be used to adjust the phase of the signal as lamp conditions change to reduce reflection of power from the waveguide body 132 and maintain efficient coupling of power. The phase may also be adjusted during the ignition process to over couple power to the waveguide body for a short period of time in order to spike the power to expedite initial ignition of the plasma in the bulb. The phase-shifter may be controlled by a microcontroller MC1 or other control circuit during the start-up process and steady state operation to achieve desired operating characteristics.

Additional details regarding example embodiments will now be described with reference to FIGS. 1-10. Referring to FIGS. 1, 2 and 3, a plasma lamp 20 according to an example

embodiment includes a cylindrically-shaped dielectric waveguide body **22** having a generally circular outer surface **22S** coated with electrically conductive material **23**, a bore **24** determined by a generally circular surface **24S**, and opposed generally parallel upper and lower surfaces **22U**, **22L** coated with electrically conductive material **23**. A cylindrical dielectric sleeve **30** having an outer surface **30S** and a paraboloidal lamp chamber **32** determined by a surface **32S** is closely received within bore **24**. The dielectric sleeve **30** forms the desired reflective lamp chamber **32**, but is fabricated as a separate insert that can fit into the bore **24** in waveguide body **22** for ease of manufacture. While FIGS. **1**, **2** and **3** illustrate how the dielectric sleeve **30** would be inserted into the bore **24**, the top of the dielectric sleeve **30** would be aligned with the top of the waveguide body **22** when fully assembled in this example embodiment. Waveguide body **22** and sleeve **30** can be made of any low-loss, high dielectric constant material, although alumina is used in a particular example embodiment.

Plasma lamp **20** further includes a metallic top adapter plate **34** having a lower surface **34L** to which is electrically grounded an electromagnetic field-concentrating antenna **40**, and a metallic bottom adapter plate **36** having upper and lower surfaces **36U**, **36L**. A generally cylindrical, metallic holder **38** having a lip **38L** is attached to surface **36U**. A bulb assembly **50** having upper and lower ends **50U**, **50L** is positioned symmetrically along the common longitudinal axis of waveguide body **22** and lamp chamber **32**. As described above, the bulb assembly may be formed from a tube of dielectric material sealed near one end to form a bulb **56** within the bulb assembly. The other end may comprise a length of tube that supports the bulb assembly. The tube is inserted through holes **25H** and **31H** to position the bulb in the lamp chamber **32**. Antenna **40** is proximate to but does not touch bulb assembly upper end **50U**. Bulb assembly end **50L** is closely received within and bonded to holder **38**. Surface **36L** is attached to a housing **60** including a circuit board **62** including a microwave amplifier **63** and associated circuitry, and a heatsink-radiator **64**. Adapter plates **34** and **36** are bolted to housing **60**. Coaxial feeds leading to drive probe **66** and feedback probe **68** extend through circuit board **62** and are received within holes **66H**, **68H**, respectively, in surface **22L** of waveguide body **22**. The adapter plate holds the bulb assembly **50** in position relative to the through holes for the probes and acts as a convenient mechanism for aligning the bulb assembly and probes with the waveguide body **22** and dielectric sleeve **30**. Thus, plasma lamp **20** is a single unit integrating the waveguide body **22**, lamp chamber **32**, antenna **40**, bulb assembly **50**, circuit board **62**, and heatsink-radiator **64**.

Still referring to FIG. **3**, waveguide body **22** has a lower solid portion **25** with a central hole **25H**, and sleeve **30** has a lower solid portion **31** with a central hole **31H** aligned with hole **25H**. Bulb assembly **50** is closely received through holes **25H** and **31H**. The outer surface **30S** of sleeve **30** is coated with an alumina adhesive **30A** which bonds to the bore surface **24S**. Chamber surface **32S** is coated with a plurality of multi-layer dielectric coatings **32C** designed to reflect the visible spectrum, as described above. Although chamber **32** is shown to have the shape of a parabola rotated about the longitudinal axis, its shape can be any a number of similarly rotated conic curves, a plurality of discretely-faceted surfaces, or surfaces of arbitrary shape as optimized by optical ray-tracing analysis.

Alternatively, a one-piece waveguide body and lamp chamber can be used. FIG. **4** shows a cylindrical, dielectric waveguide body **70** bounded by an outer surface **70S** and lower and upper surfaces **70L**, **70U**. Body **70** includes a lamp

chamber **72** determined by a paraboloidal surface **72S** coated with a plurality of dielectric coatings **72C**. The bottom of chamber **72** is in communication with a hole **74** sized to closely receive a bulb assembly. Holes **76H**, **78H** are sized to closely receive, respectively, a drive probe and feedback probe.

A plasma bulb must operate at elevated wall temperatures ($>800^{\circ}\text{C.}$) and internal pressures (between 50 and 250 atmospheres). Fabrication methods which use a separate fill-tube ("tip") to introduce light-emitting material into a bulb made from tubing stock, may result in a very thin closure where the fill-tube was attached to the tubing, typically 1-1.5 mm in thickness, or other surface irregularities. A bulb with such a "thin spot" may have reliability problems at such high temperatures and pressures and could potentially rupture. Also, using a tip may leave an optical blemish on the bulb surface which decreases light throughput. Also, thermal asymmetries may develop which can affect consistent evaporation of halides (and therefore consistent color and lumens as well as consistent warm-up time to full brightness) from bulb to bulb.

In some example lamps, the waveguide body may be narrowed in the region adjacent to the bulb to limit the length of the plasma region. In the example embodiments shown in FIGS. **1-4**, the bulb is positioned in the lamp chamber spaced apart from the walls to provide desired reflection and ray divergence. In these example embodiments, the entire internal volume of the bulb is exposed to power coupled into the lamp chamber from the waveguide body. As a result, the length and diameter of the plasma region in the bulb is limited by the dimensions of the bulb and not the shape of the waveguide body adjacent to the bulb. In order to provide a short arc, it is desirable to make the interior bulb volume very short and narrow in the example embodiments of FIGS. **1-4**. In one example embodiment, the internal length of the bulb may be about 5 mm and the internal width may be about 3 mm.

In some example lamps, the waveguide body may also provide a heatsink to avoid excessive bulb temperatures. In the example embodiments shown in FIGS. **1-4**, the bulb is spaced apart from the walls. Without a heatsink in contact with the bulb, the bulb must survive considerably higher power loadings per unit surface area (i.e., considerably higher bulb temperatures). In order to achieve this in the example embodiments of FIGS. **1-4**, the wall of the bulb is made relatively thick with as uniform a wall thickness as practical. A thick-wall bulb will distribute heat far more uniformly than will a thin-wall bulb, or one with wall thickness irregularities. These properties may be achieved by forming a tipless bulb from a tube of dielectric material, such as quartz, in example embodiments. An additional benefit to fabricating a tipless bulb from a tube is a convenient mounting stem formed from the same piece of tubing stock, which can be easily tailored to the desired length to support the bulb in the lamp chamber.

An example bulb **56**, shown in FIG. **5**, is fabricated from tubing stock, such as quartz, without the need for a separate tip. An example method of fabricating a plasma bulb such as bulb **56** is as follows:

A tube, typically cut from a piece of longer stock, is selected having an outer diameter and wall thickness about the same as those of the desired bulb, and a length that depends on the desired length of the bulb assembly. In one example, the outer diameter is about 7 mm and the wall thickness is about 2 mm.

The tube is cleansed and rinsed.

Using a hydrogen-oxygen torch, one end of the tube is rounded and smoothed on a glass-lathe to form an approximately hemispherical closure (**52**, FIG. **5**) with

an inner radius about the same as the tube inner radius, and a wall thickness about the same as the tube wall thickness. In other embodiments, other heat sources or mechanisms may be used to close the end of the tube.

The partially formed body is re-cleansed.

The open end (**54**, FIG. **5**) of the tube is filled with a "light-emitter". Typically, mercury or indium bromide is used. Other light-emitter substances may be used in other embodiments, including iodides, bromides and/or chlorides of lithium, sodium, potassium, rubidium, cesium, strontium, scandium, cerium, praseodymium, neodymium, gadolinium, dysprosium, holmium, hafnium, thallium, lutetium, yttrium, erbium, thulium, terbium and europium. Pure metals and halogens can also be introduced into the tube to achieve desired properties.

The filled tube is attached on a high vacuum system with a standard fitting of the appropriate diameter (e.g., an UltraTorr™ fitting available commercially from SwageLok Inc.) and evacuated. The tube is then back-filled with the desired "starting gas" at the desired pressure. Typically, the starting gas is argon, although neon, krypton or xenon may be used in other embodiments. In example embodiments, the gas pressure is in a range between about 10 and 500 Torr or any range subsumed therein.

The tube is then closed with a hydrogen-oxygen torch at a point (**55**, FIG. **5**) approximately one inch longer than the desired inner length (about 5 mm) of the bulb, to form a bulb (**56**, FIG. **5**). The sealed bulb may be frozen in the tube using a cryogenic material such as a liquid nitrogen bath, so the stem can be heat collapsed at negative pressure up to the desired bulb edge without evaporation of the internal fill materials creating internal positive pressure.

The bulb and attached stem (**58**, FIG. **5**) are removed from the vacuum system. If necessary, the stem can be trimmed to the correct length. Residual silica dust is removed from the lamp surfaces using hydrofluoric acid or buffing compound.

The bulb assembly may be mounted to a structure exterior to the dielectric waveguide body, such as adapter plate **36** in FIG. **1**. The stem acts as a bulb support and extends through holes **25H** and **31H** as shown in FIG. **3** to position the bulb **56** at the desired location in the lamp chamber **32**. This provides an easy way to secure and align the bulb and position it in the lamp chamber. In alternate embodiments, a bulb support may be bonded to the bottom of the lamp chamber or the waveguide body with a sintered alumina-powder layer or other adhesive material to hold the bulb in the desired position.

FIG. **6** shows the stem **58** mounted within holder **38** and bonded to the holder with high temperature, epoxy cement. Holder **38** includes a screw **39** for attachment to bottom adapter plate **36**. The overall length of the bulb and stem is dependant on the desired position for the bulb in the lamp chamber. In example embodiments, this may depend upon the focal length of the lamp chamber's reflecting surface and details of the mounting design.

In example embodiments, the dielectric waveguide body **22** has one or more resonant modes each manifested as a certain spatial-intensity distribution of radio frequency (RF) field confined within the body. A suitably designed antenna within the lamp can intercept the RF field in the lamp chamber to create AC currents therein. The AC current in the antenna can in turn radiate into a partially enclosed space in which the bulb is closely received. The dimensions of this space must be small compared to the RF field wavelength; the net effect is a

concentration of RF field in the enclosed space, i.e., space proximate to the bulb. A conductive material adjacent to the bulb may be used to form an antenna of this type and thereby concentrate the RF field near the bulb.

Referring to FIG. **7**, field-concentrating antenna **40** is a "top" antenna having a wire cage **42** forming a tight semi-enclosed space around bulb **56** at a separation in a range from about 0.1 mm to 5.0 mm or any range subsumed therein. Cage **42** is attached to a rigid lead-wire **44** which maintains the position of cage **42** and forms a common electrical ground with coatings **23**, adapter plates **34**, **36**, and housing **60**. In example embodiments, such antennas may be fabricated from a conductor with a high melting point having an electrical conductivity greater than 10^7 Siemens/meter. Example embodiments may use conductive materials such as nickel, platinum, molybdenum and titanium. In addition to machining, antennas can be fabricated using stamped sheet-metal or even wire. In example embodiments, the antenna thickness is selected so that it is thick enough to resist melting, and thin enough to avoid blocking an unacceptable fraction of light. Also, in example embodiments, the antenna thickness is selected to be significantly larger than the RF penetration depth ("skin depth"). In example embodiments, the thicknesses may be in the range of from about 0.1 to 2 mm or any range subsumed therein. In example embodiments, the antenna is grounded to a conductively-coated surface of the dielectric waveguide body. Various physical shapes for the antenna can be used to achieve these properties. A top antenna, bottom antenna, or both can be used. In example embodiments, the enclosure can take the form of a wire cage, fork or ring. Other shapes can also be used in other embodiments. The shapes of a top and bottom antenna can be different in some embodiments. Design of such antennas can be optimized using commercial electromagnetic modeling software such as HFSS™, available from Ansoft, Inc. of Pittsburgh, Pa., and FEMLAB™, available from COMSOL, Inc. of Burlington, Mass. In these example embodiments, the field-concentrating antenna is not physically connected to the drive or feedback probe.

FIG. **8** shows a design simulation, using the HFSS™ software package, of the electric field spatial-intensity distribution in a cylindrical alumina waveguide body **80** resonating at a frequency of 878 MHz. Body **80** includes a paraboloidal lamp chamber **82** into which is inserted a bulb assembly **84** with a bulb **86**, and contains an inserted drive probe **88**. For simplicity, the feedback probe is not simulated because its coupling to the field (and hence its perturbation on the field) is small by design. The arrows point in the direction of the electric field; their lengths indicate relative intensity. FIG. **9** shows the electric field spatial-intensity distribution when a cage **92** of a field-concentrating antenna **90** forms a tight semi-enclosed space around bulb **86** at a separation of 1 mm. The field-concentrating effect of antenna **90** is evident. Such simulations predict that the ratio of field strength in the center of a bulb with and without an antenna is in a range from about 1.05 to 10.

FIG. **10** shows an example bulb assembly **100** having a "top-and-bottom" antenna configuration. In this example embodiment, the antennas are enclosed in a dielectric material, such as quartz tubing extending from the top and bottom of the bulb. This helps avoid problems that can lead to failure of a bare antenna. A bare antenna may have failure mechanisms due to arcing to a conducting surface, and/or rapid oxidation or melting due to high RF currents flowing through the antenna(s) and/or high temperature conducted or radiated from the bulb. Bulb assembly **100**, which is fabricated from quartz tubing, includes a central bulb **102** disposed between

11

upper and lower stems **104, 106**. Opposed “top” and “bottom” antenna elements **108, 110** are spot-welded, respectively, to lead-wires **112, 114** which exit the bulb through tubing openings **116, 118**, respectively. Antenna elements **108, 110** are connected to a common electrical ground. At each bulb assembly end, multiple lead-wires may be used to improve both electrical and thermal conductivity. Antenna elements **108, 110** are sealed in a dielectric material, such as quartz, and lead-wires **112, 114** are fixed in position when the bulb **102** is formed by sealing the tubing at locations **119A, 119B**. Lower stem **106** is closely received within and bonded to metallic holder **120** which includes a screw **122** for attachment to bottom adapter plate **36**. Antenna elements may be strips of molybdenum micro-foil typically having a thickness of about 0.001 inch, and a length in a range of 2 to 10 mm, or any range subsumed therein, and a width in a range of 1 to 5 mm, or any range subsumed therein. The use of very thin foils and spot-welding prevents cracking of the quartz-enclosing seals as well as failure due to expansion mismatch of any diameter of metal wire capable of conducting the RF currents to which the antennas are exposed in the high temperature environment. The simple geometry of a bulb assembly such as assembly **100** makes it easier to fabricate than a bulb assembly such as assembly **50**. The above antenna configurations and dimensions are examples only and other configurations may be used in other embodiments.

A bulb assembly such as bulb assembly **100** can be fabricated either according to the “one-piece” method described above for bulb assembly **50**, or by presealing the antenna elements in separate stems which are then fused to the bulb. The following summarizes example bulb assembly fabrication processes for both one- and two-stem/antenna configurations:

A finished bulb assembly can be produced with a single stem (for attachment to a dielectric waveguide body and/or lamp chamber by cement or other means), or with a stem at each end for enclosing and positioning an antenna at either both ends. As described above, in example embodiments, the antenna may be a molybdenum micro-foil in close proximity to the bulb, with outer conducting wire(s) spot-welded to the micro-foil and attached to an electrical ground. If there is to be a sealed antenna at the upper end, that antenna may be hermetically sealed into the upper stem using a “shrink” seal process. This is done by presealing in a separate stem, later to be fused to a partial bulb assembly including the bulb with the open lower stem already attached, but before the fill material(s) are inserted and before a second antenna, if used, is sealed into the lower stem. Alternatively, the upper antenna can be sealed into one arm of a preformed assembly with an open stem on each end using a shrink seal process. The bulb assembly (with the upper stem hermetically sealed and attached if an upper antenna is to be used; otherwise without an upper arm, but with the bulb assembly sealed everywhere except for an open lower stem) is then filled under clean conditions through the lower stem with the required solid and/or liquid fill material(s). If an antenna sub-assembly (e.g., the antenna element and lead-wire(s)) in the stem is to be mounted in the dielectric waveguide body or lamp chamber, the antenna with the attached lead-wire(s) are then inserted into the lower stem and aligned into axial position. The bulb assembly then placed at an appropriate station for filling the lower stem and bulb with rare gas. The fill material(s) and all parts of the antenna sub-assembly are completely enclosed in the bulb/lower stem and the bulb assembly is attached to the gas-filling apparatus by an O-ring or other suitable means. After (negative gauge pressure) gas-filling, the lower stem is “long-tipped” (i.e., collapsed by heating at a distance beyond

12

the inserted length of the foil/lead-wire(s) sub-assembly). The hermetically sealed structure is then placed in an apparatus which immerses the bulb assembly into a cryogenic environment (e.g., liquid nitrogen) so that final sealing of the lower stem (with or without the antenna sub-assembly) can be accomplished by heat collapsing the stem at negative pressure up to the bulb edge without evaporation of the fill material(s) creating positive pressure (which would prevent collapsing of the quartz under applied heat and final closure). Each bulb assembly stem is then cut to an appropriate length, exposing the lead-wire(s) for attachment to the common electrical ground. A metal (or, if lead-wires protrude, a slotted metal or non-conducting end cap) can be attached to the lower stem if needed for precise alignment of the bulb.

What is claimed is:

1. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;

a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material; and

a conductive material adjacent to the bulb to concentrate the power proximate the bulb, wherein the conductive material modifies at least a portion of an electric field proximate the bulb so that the portion of the electric field is oriented substantially parallel to an upper surface of the lamp body, the opening being provided in the upper surface.

2. The lamp of claim 1, comprising a conductive coating on an outer surface of the solid dielectric material, the solid dielectric material and the conductive coating forming a waveguide.

3. The lamp of claim 2, wherein the conductive material modifies at least a portion of an electric field proximate the bulb so that the portion of the electric field is oriented substantially parallel to an upper surface of the lamp body, the opening being provided in the upper surface.

4. The lamp of claim 2, wherein the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with a length of the bulb.

5. The lamp of claim 4, comprising a power source configured to provide the power to the solid dielectric material through the RF feed at at least one frequency that resonates within the lamp body.

6. The lamp of claim 1, wherein the conductive material is located below an upper surface of the solid dielectric material.

7. The lamp of claim 1, wherein the conductive material is configured to concentrate an electrical field distribution of the power proximate the bulb.

8. The lamp of claim 1, wherein the conductive material forms a semi-enclosed space around an end of the bulb to concentrate the electric field distribution proximate the bulb.

9. The lamp of claim 1, wherein the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with a length of the bulb.

10. The lamp of claim 9, wherein the bulb is elongated and has a width that is less than the length of the bulb.

11. The lamp of claim 1, wherein the RF feed is a probe received within the solid dielectric material and the portion of the electric field proximate the bulb is oriented orthogonal to the probe.

12. The lamp of claim 1, wherein the RF feed is a probe received within the solid dielectric material and the portion of the electric field proximate the bulb is oriented substantially parallel with the probe.

13

13. The lamp of claim 1, wherein the conductive material forms a semi-enclosed space in which an end of the bulb is received.

14. The lamp of claim 1, wherein the conductive material is grounded to a conductively-coated surface of the lamp body.

15. The lamp of claim 1, wherein the conductive material comprises:

a first antenna element with a first proximal end located adjacent a first end of the bulb and a first distal end grounded; and

a second antenna element with a second proximal end located adjacent a second end of the bulb and a second distal end grounded.

16. The lamp of claim 1, wherein the conductive material is a thin foil.

17. The lamp of claim 1, wherein the power is provided by a power source configured to power at about a resonant frequency for the lamp body.

18. The lamp of claim 1, wherein the lamp body is configured to resonate in the fundamental mode when the power is provided to the lamp body at an operating frequency of the lamp.

19. The lamp of claim 1, comprising a conductive coating on an outer surface of the solid dielectric material, the solid dielectric material and the conductive coating forming a wave guide.

20. The lamp of claim 19, wherein the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with a length of the bulb.

21. The lamp of claim 1, comprising a power source configured to provide the power to the solid dielectric material through the RF feed at at least one frequency that resonates within the lamp body.

22. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;
a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material; and

a conductive material adjacent to the bulb to concentrate the power proximate the bulb, wherein the RF feed is a probe received within the solid dielectric material and the conductive material modifies at least a portion of an electric field proximate the bulb so as to be oriented orthogonal to the probe received within the solid dielectric material.

23. The lamp of claim 22, wherein the conductive material is located below an upper surface of the solid dielectric material.

24. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;
a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material; and

a conductive material adjacent to the bulb to concentrate the power proximate the bulb, wherein the RF feed is a probe received within the solid dielectric material and the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with the probe received within the solid dielectric material.

25. The lamp of claim 24, wherein the conductive material is located below an upper surface of the solid dielectric material.

14

26. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;

a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material; and

a conductive material adjacent to the bulb to concentrate the power proximate the bulb, wherein the conductive material forms a semi-enclosed space in which an end of the bulb is received, and wherein the conductive material comprises:

a shaped end portion that forms the semi-enclosed space in which the end of the bulb is received; and

an elongate portion attached to the shaped end portion, the elongate portion being grounded to a conductively coated surface of the lamp body.

27. The lamp of claim 26, wherein the conductive material is located below an upper surface of the solid dielectric material.

28. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;

a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material; and

a conductive material adjacent to the bulb to concentrate the power proximate the bulb, wherein the conductive material comprises:

a first antenna element with a first proximal end located adjacent a first end of the bulb and a first distal end grounded; and

a second antenna element with a second proximal end located adjacent a second end of the bulb and a second distal end grounded.

29. The lamp of claim 28, wherein the conductive material is located below an upper surface of the solid dielectric material.

30. An electrodeless plasma lamp comprising:

a lamp body comprising a solid dielectric material;

a bulb received at least partially within an opening in the solid dielectric material;

a radio frequency (RF) feed configured to provide power to the solid dielectric material;

a conductive material adjacent to the bulb to concentrate the power proximate the bulb; and

a conductive coating on an outer surface of the solid dielectric material, the solid dielectric material and the conductive coating forming a waveguide.

31. The lamp of claim 30, wherein the conductive material is located below an upper surface of the solid dielectric material.

32. The lamp of claim 31, wherein the conductive material is located within a chamber within the solid dielectric material.

33. The lamp of claim 30, wherein the conductive material is configured to concentrate an electrical field distribution of the power proximate the bulb.

34. The lamp of claim 33, wherein the conductive material forms a semi-enclosed space around an end of the bulb to concentrate the electric field distribution proximate the bulb.

35. The lamp of claim 30, wherein the conductive material concentrates spatial intensity of the electric field proximate the bulb.

36. The lamp of claim 30, wherein the conductive material modifies at least a portion of an electric field proximate the bulb so that the portion of the electric field is oriented sub-

15

stantially parallel to an upper surface of the lamp body, the opening being provided in the upper surface.

37. The lamp of claim 30, wherein the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with a length of the bulb.

38. The lamp of claim 37, wherein the bulb is elongated and has a width that is less than the length of the bulb.

39. The lamp of claim 38, wherein the bulb has a central portion that is cylindrical.

40. The lamp of claim 30, wherein the RF feed is a probe received within the solid dielectric material and the conductive material modifies at least a portion of an electric field proximate the bulb so as to be oriented orthogonal to the probe received within the solid dielectric material.

41. The lamp of claim 30, wherein the RF feed is a probe received within the solid dielectric material and the conductive material concentrates at least a portion of an electric field within the bulb, the portion of the electric field being substantially parallel with the probe.

42. The lamp of claim 30, wherein the conductive material forms a semi-enclosed space in which an end of the bulb is received.

43. The lamp body of claim 42, wherein the conductive material comprises:

- a shaped end portion that forms the semi-enclosed space in which the end of the bulb is received; and
- an elongate portion attached to the shaped end portion, the elongate portion being grounded to the conductive coating.

44. The lamp of claim 30, wherein the bulb is separated from the conductive material in an range of about 0.1 mm to 5.0 mm.

45. The lamp of claim 30, wherein the conductive material is grounded to the conductive coating.

46. The lamp of claim 30, in which the bulb has an inner length less than about 10 mm.

47. The lamp of claim 30, wherein the power is coupled to the bulb through the lamp body.

48. The lamp of claim 30, wherein the conductive material is grounded and forms a radio frequency antenna adjacent to the bulb.

49. The lamp of claim 30, wherein the lamp body forms a lamp chamber and the bulb is positioned at least partially within the lamp chamber.

50. The lamp of claim 30, wherein the lamp body forms a lamp chamber and the bulb is positioned completely within the lamp chamber.

51. The lamp of claim 30, wherein the lamp body forms a lamp chamber including a reflective surface to reflect light from the bulb out of the lamp chamber.

52. The lamp of claim 51, wherein the reflective surface of the lamp chamber is tapered.

53. The lamp of claim 30, wherein the lamp body forms a lamp chamber having a shape that is substantially paraboloidal.

54. The lamp of claim 30, wherein the lamp body forms a lamp chamber having a shape that is substantially ellipsoidal.

55. The lamp of claim 30, wherein the lamp body forms a lamp chamber, the bulb being positioned in the lamp chamber at about the focal point of the shape of the lamp chamber.

56. The lamp of claim 30, wherein the conductive material comprises:

- a first antenna element with a first proximal end located adjacent a first end of the bulb and a first distal end grounded; and

16

a second antenna element with a second proximal end located adjacent a second end of the bulb and a second distal end grounded.

57. The lamp of claim 56, wherein the first and second antenna elements are positioned to concentrate power proximate to the bulb.

58. The lamp of claim 56, wherein the first and second antenna elements are located in a dielectric material.

59. The lamp of claim 56, wherein the first and second antenna elements are at least partially located within the bulb.

60. The lamp of claim 56, wherein the first and second antenna elements have a length in the range of 2 to 10 mm.

61. The lamp of claim 56, wherein the first and second antenna elements have a width in the range of 1 to 5 mm.

62. The lamp of claim 30, wherein the distance from the conductive material to the interior of the bulb is within a range of 0.1 mm to 5 mm.

63. The lamp of claim 30, wherein the distance from the conductive material to the interior of the bulb is less than the thickness of the bulb wall.

64. The lamp of claim 30, wherein the conductive material extends into the bulb wall.

65. The lamp of claim 30, wherein the conductive material is a thin foil.

66. The lamp of claim 30, wherein the conductive material has a thickness less than about 100 microns.

67. The lamp of claim 30, wherein the conductive material has a thickness less than about 20 microns.

68. The lamp of claim 30, wherein the conductive material comprises molybdenum.

69. The lamp of claim 30, wherein the conductive material is enclosed in the solid dielectric material in the region adjacent to the bulb.

70. The lamp of claim 30, wherein the conductive material is hermetically sealed in the solid dielectric material in the region adjacent to the bulb.

71. The lamp of claim 30, wherein the power is provided by a power source configured to power at about a resonant frequency for the lamp body.

72. The lamp of claim 30, wherein the lamp body is configured to resonate in the fundamental mode when the power is provided to the lamp body at an operating frequency of the lamp.

73. The lamp of claim 72, wherein bulb contains a plasma and the conductive material concentrates power proximate the bulb at the operating frequency of the lamp after formation of the plasma.

74. The lamp of claim 30, comprising a drive probe embedded in the lamp body to provide power to the lamp body.

75. The lamp of claim 30, comprising a feedback probe embedded in the lamp body to obtain feedback from the lamp body.

76. The lamp of claim 75, comprising a power source coupled to the feedback probe and configured to amplify feedback from the lamp body to maintain an operating frequency at or near a resonant frequency for the lamp body during operation.

77. The lamp of claim 30, wherein the conductive material concentrates power provided to the bulb after ignition of a plasma formed by a fill in the bulb.

78. The lamp of claim 30, comprising a phase shifter which is provided in an electrical path with the RF feed.

79. The lamp of claim 30, wherein the outer surface has opening, the outer surface having the conductive coating except at the opening.