



(12) **United States Patent**
Toft et al.

(10) **Patent No.:** **US 12,584,610 B2**
(45) **Date of Patent:** ***Mar. 24, 2026**

(54) **SYSTEM FOR AN OPTICAL DEVICE INCLUDING LIGHT MIXING ROD AND RESILIENT MEMBER**

F21V 29/51 (2015.01)
F21V 29/71 (2015.01)
F21Y 115/10 (2016.01)

(71) Applicant: **Harman Professional Denmark ApS**, Aarhus N (DK)

(52) **U.S. Cl.**
CPC *F21V 14/06* (2013.01); *F21S 2/005* (2013.01); *F21V 17/166* (2013.01); *F21V 21/088* (2013.01); *F21V 29/51* (2015.01); *F21V 29/713* (2015.01); *G02B 6/0001* (2013.01); *F21V 19/004* (2013.01); *F21Y 2115/10* (2016.08)

(72) Inventors: **Uffe Kjærgaard Toft**, Højbjerg (DK); **Carsten Dalsgaard**, Silkeborg (DK); **Frank Kjaer Jensen**, Skødstrup (DK); **Jutta Winkler**, Risskov (DK)

(58) **Field of Classification Search**
CPC F21V 17/166; F21V 19/004; F21V 29/51; F21V 29/713; G02B 6/0001
USPC 362/249.1
See application file for complete search history.

(73) Assignee: **HARMAN PROFESSIONAL DENMARK APS**, Aarhus N (DK)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(56) **References Cited**

This patent is subject to a terminal disclaimer.

U.S. PATENT DOCUMENTS

(21) Appl. No.: **18/963,293**

2004/0257795 A1 12/2004 Yamamoto et al.
2011/0109215 A1* 5/2011 Choi F21V 29/713 313/45

(22) Filed: **Nov. 27, 2024**

2011/0199780 A1 8/2011 Jak et al.
2013/0176748 A1 7/2013 Shaw et al.
(Continued)

(65) **Prior Publication Data**

US 2025/0172743 A1 May 29, 2025

OTHER PUBLICATIONS

European Patent Office, Extended European Search Report Issued in Application No. 24215408.6, May 8, 2025, Germany, 7 pages.

Related U.S. Application Data

Primary Examiner — Keith G. Delahoussaye
(74) *Attorney, Agent, or Firm* — McCoy Russell LLP

(60) Provisional application No. 63/603,021, filed on Nov. 27, 2023, provisional application No. 63/603,019, filed on Nov. 27, 2023, provisional application No. 63/603,023, filed on Nov. 27, 2023.


(57) **ABSTRACT**

(51) **Int. Cl.**

F21V 14/06 (2006.01)
F21S 2/00 (2016.01)
F21V 8/00 (2006.01)
F21V 17/16 (2006.01)
F21V 19/00 (2006.01)
F21V 21/088 (2006.01)

Systems are provided for an optical device. The optical device includes a light emitting diode in face-sharing contact with a light mixing rod. A resilient member is configured to maintain the light mixing rod in face-sharing contact with the light emitting diode throughout a range of motion of the optical device.

19 Claims, 32 Drawing Sheets

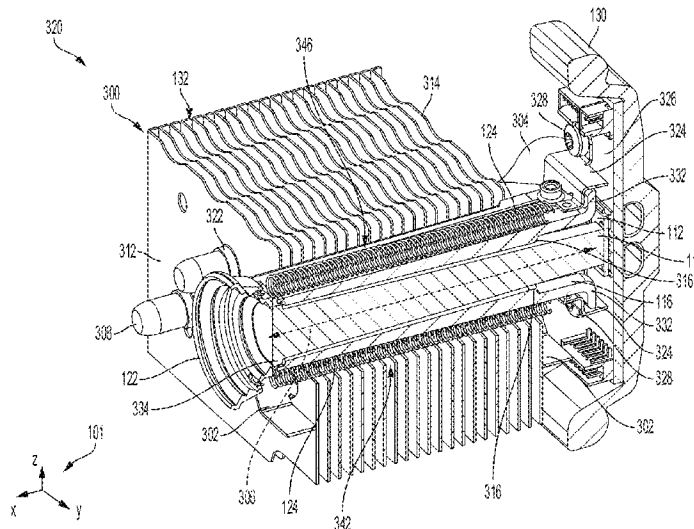

(56)

References Cited

U.S. PATENT DOCUMENTS

2015/0138825	A1	5/2015	Vinther et al.	
2020/0292162	A1*	9/2020	Tschager	F21V 7/06
2022/0187530	A1	6/2022	Hiraide	
2023/0324039	A1*	10/2023	Henrici	H05B 6/6444 126/213

* cited by examiner

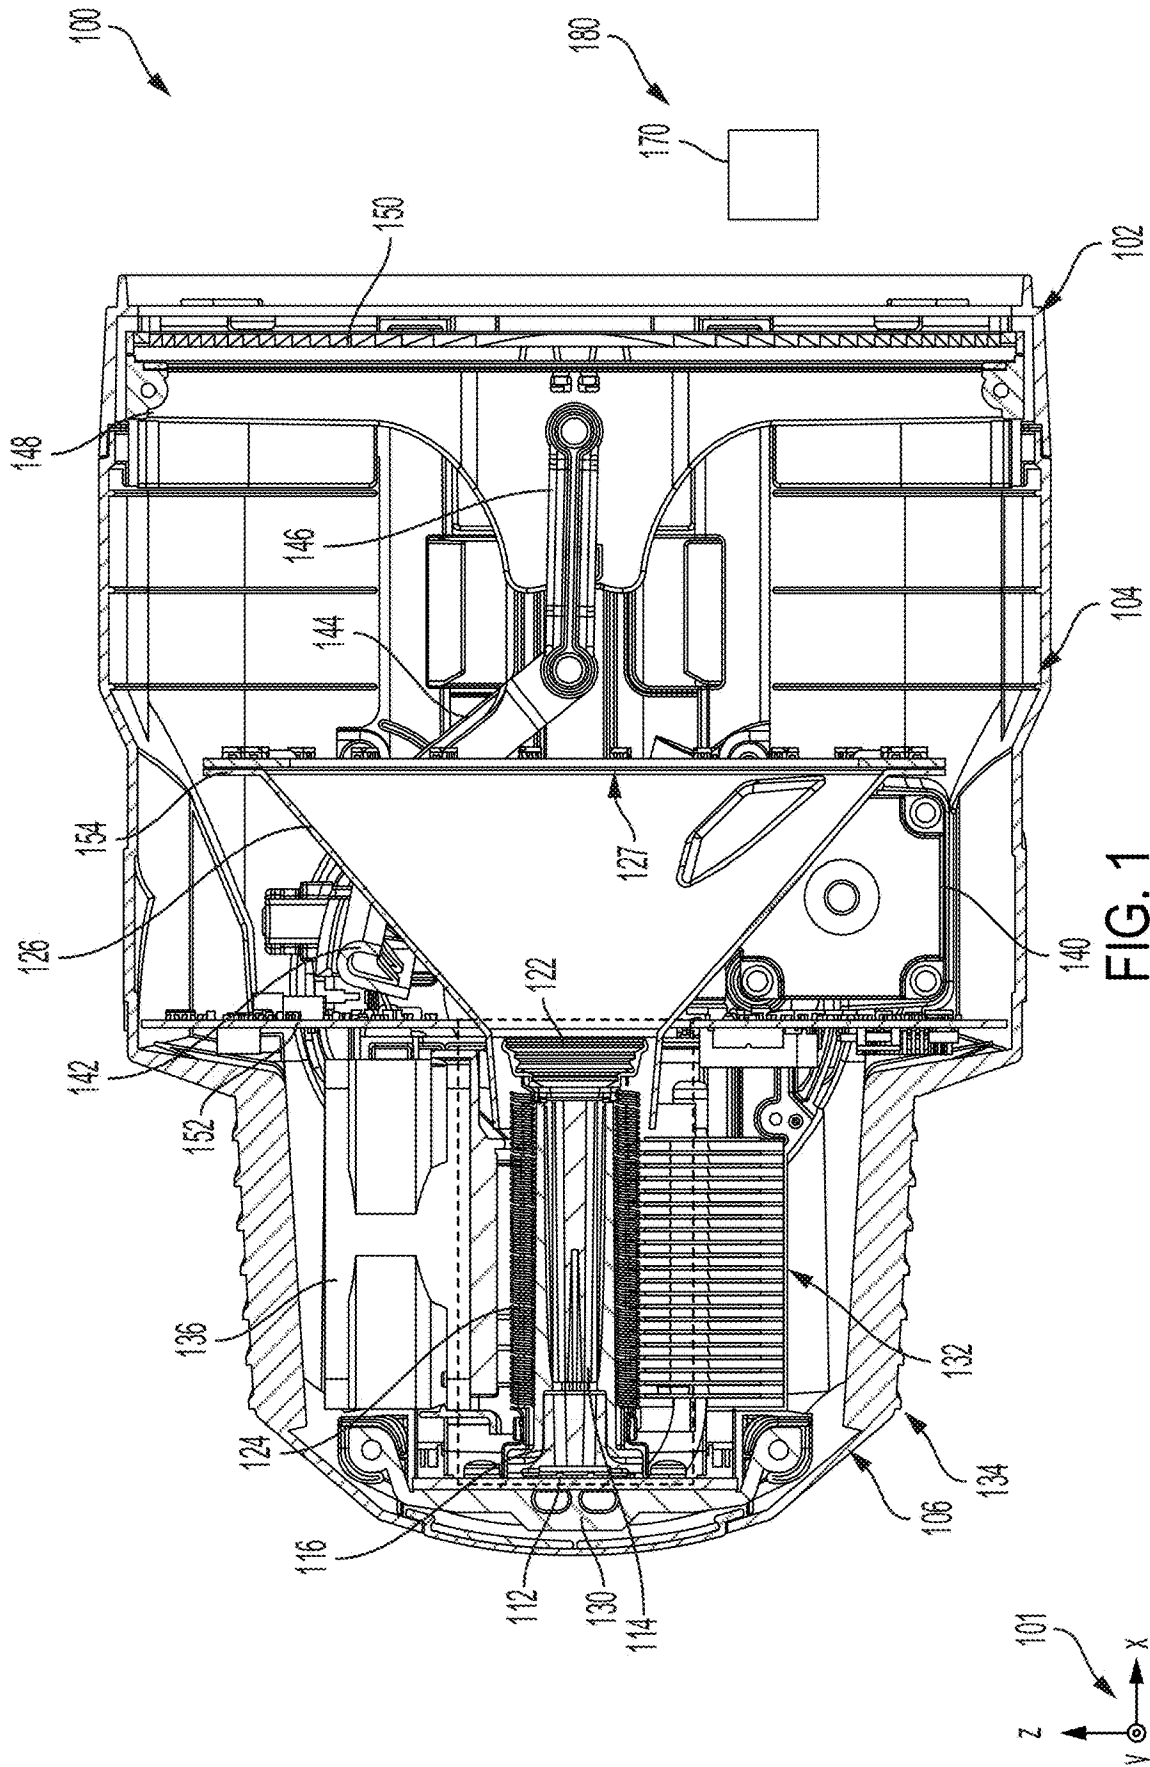


FIG. 1

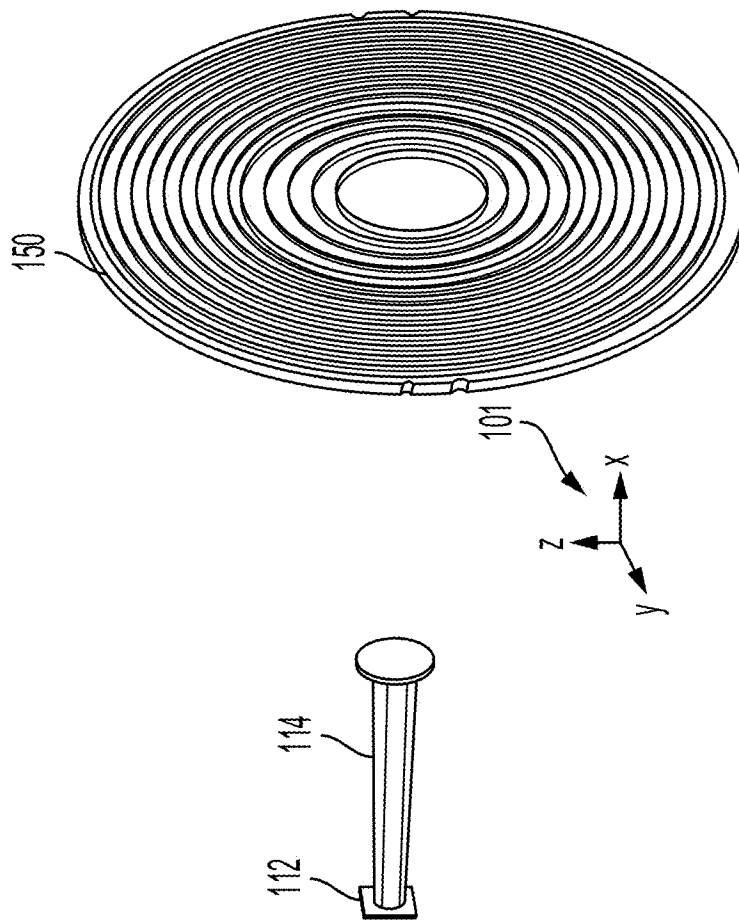


FIG. 2A

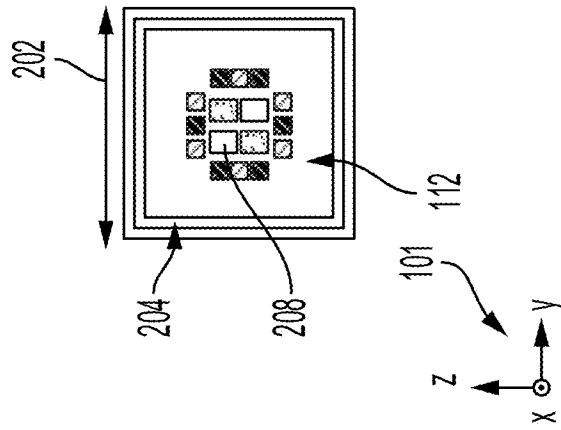


FIG. 2B

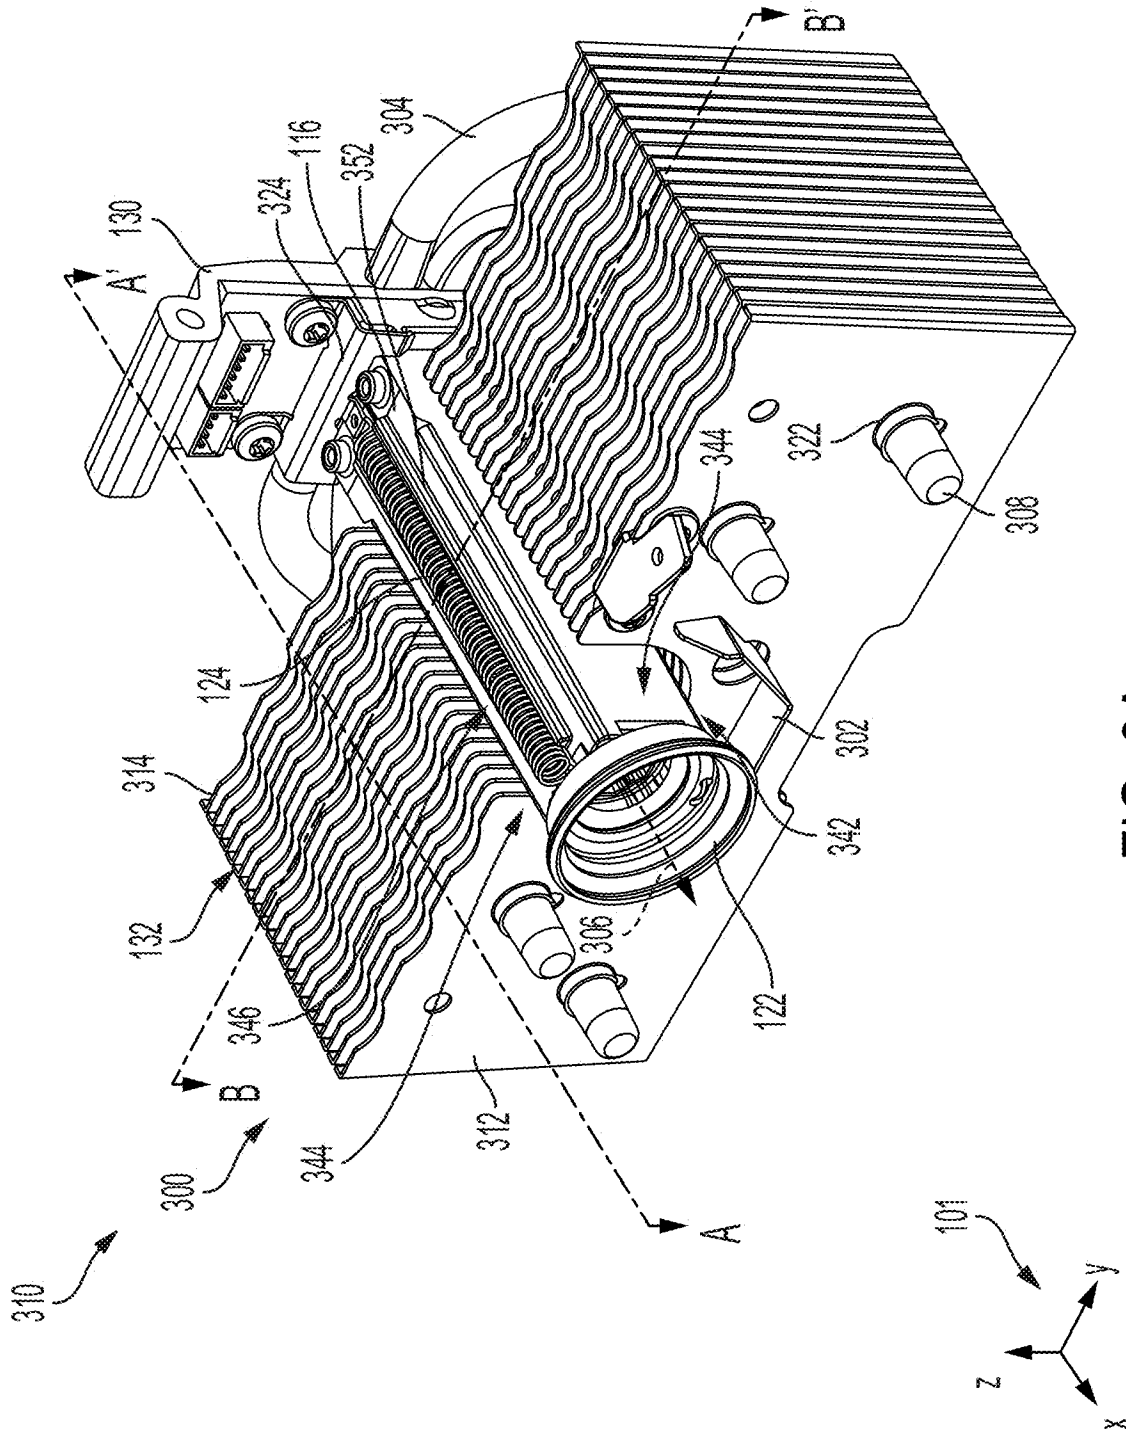


FIG. 3A

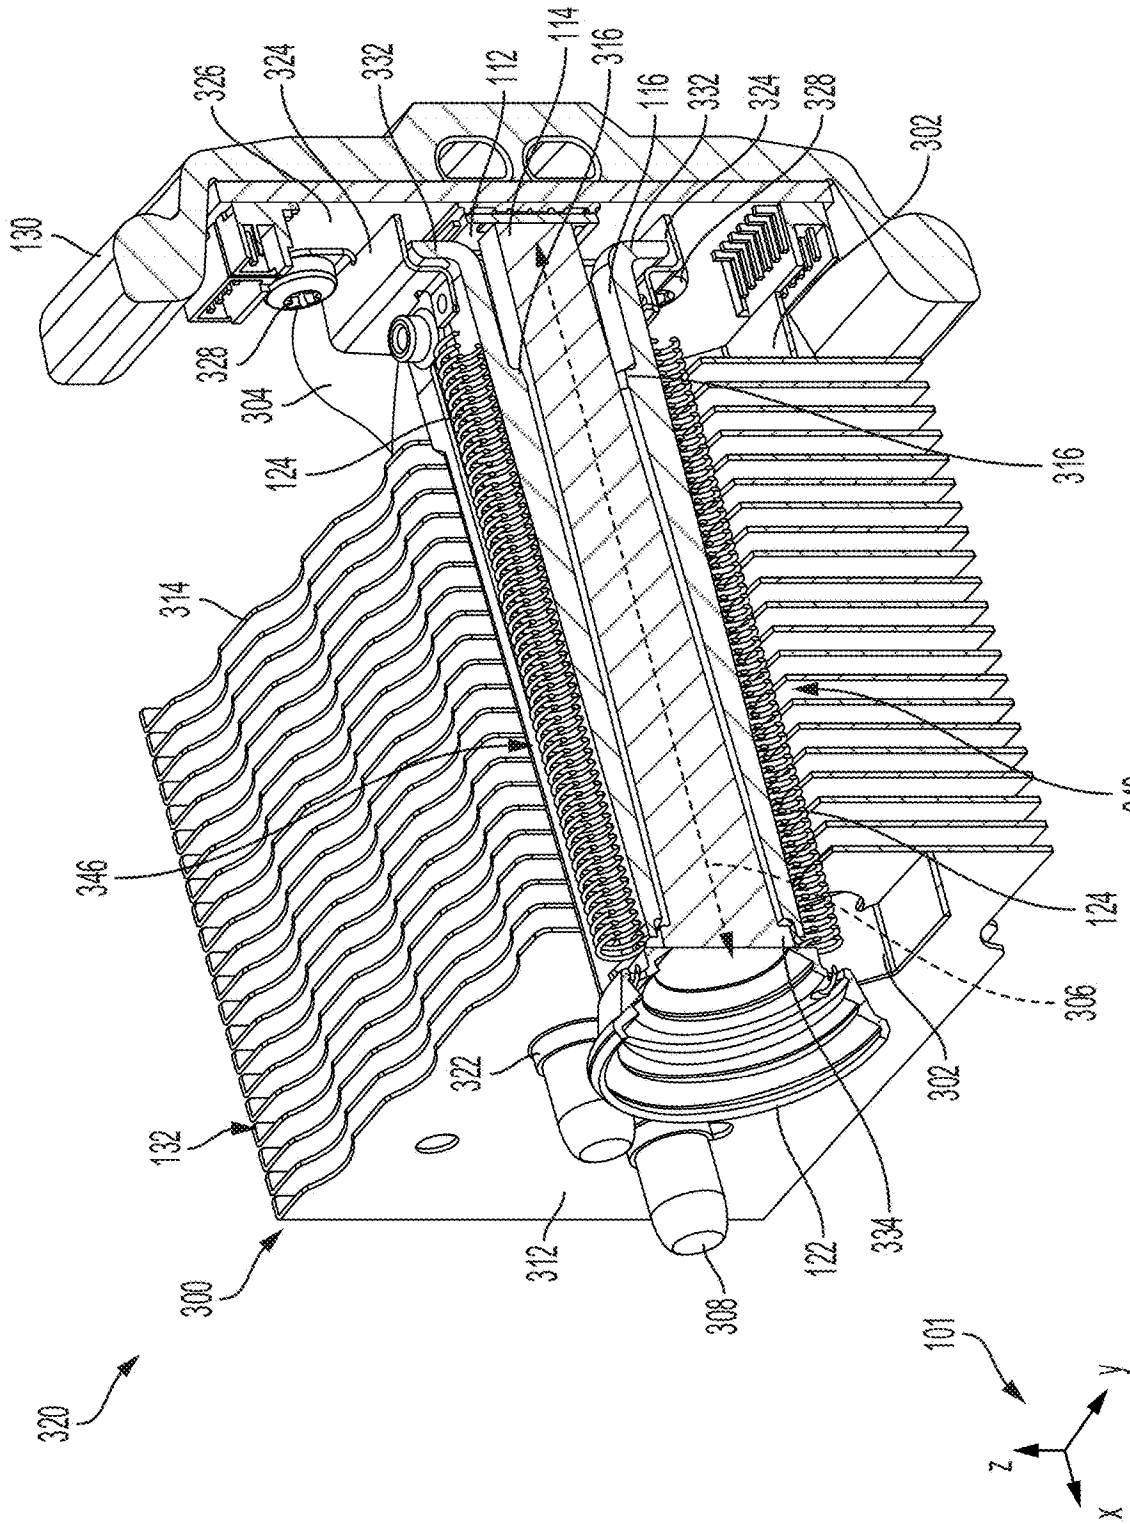
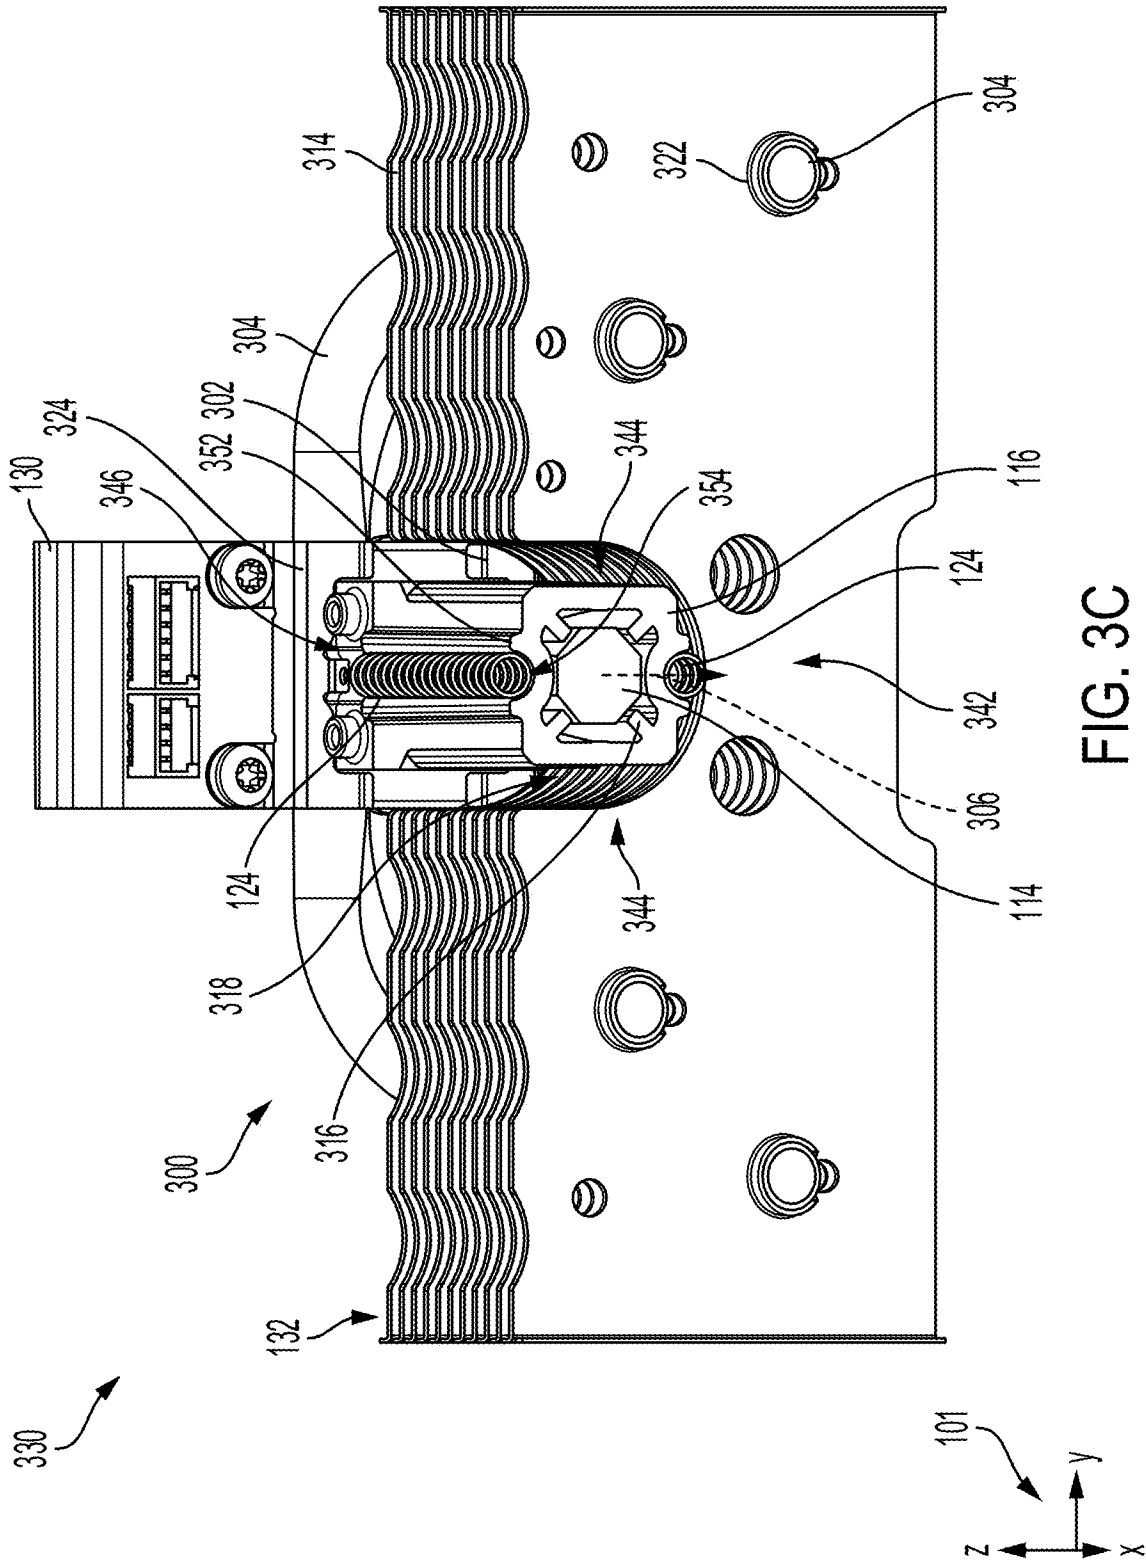


FIG. 3B



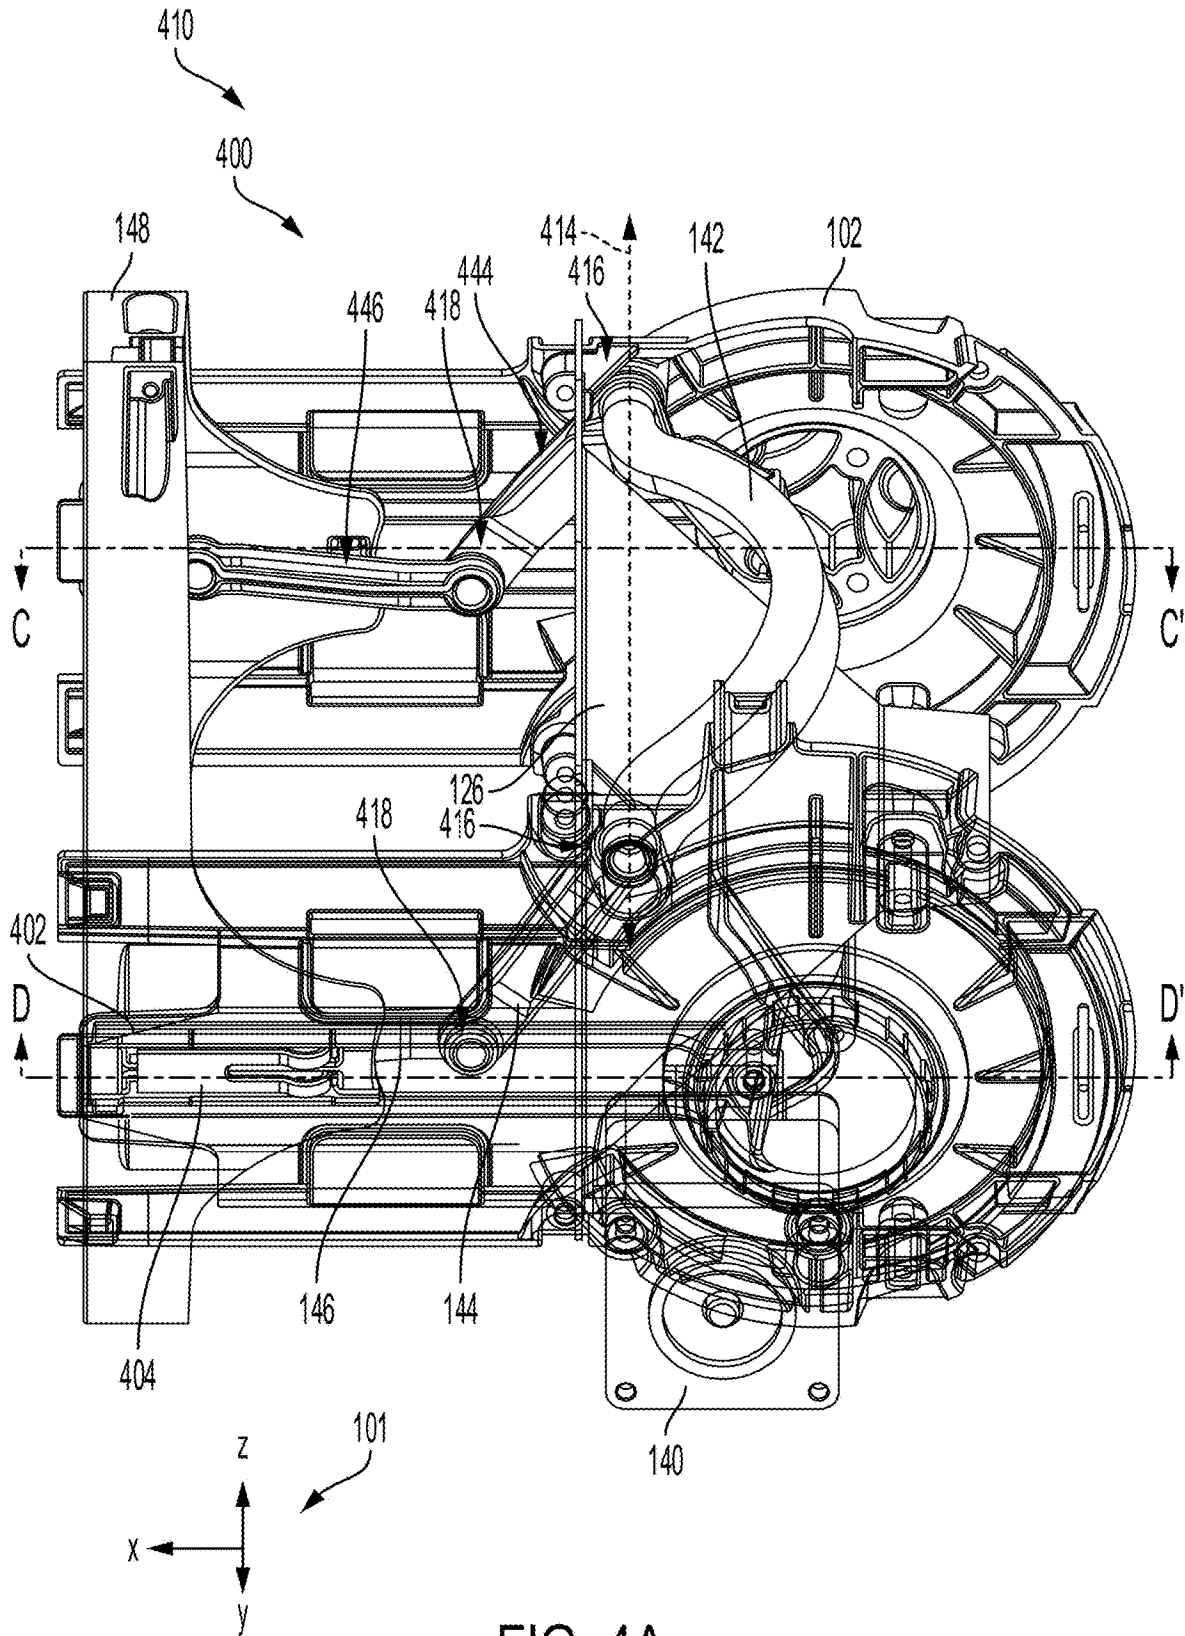


FIG. 4A

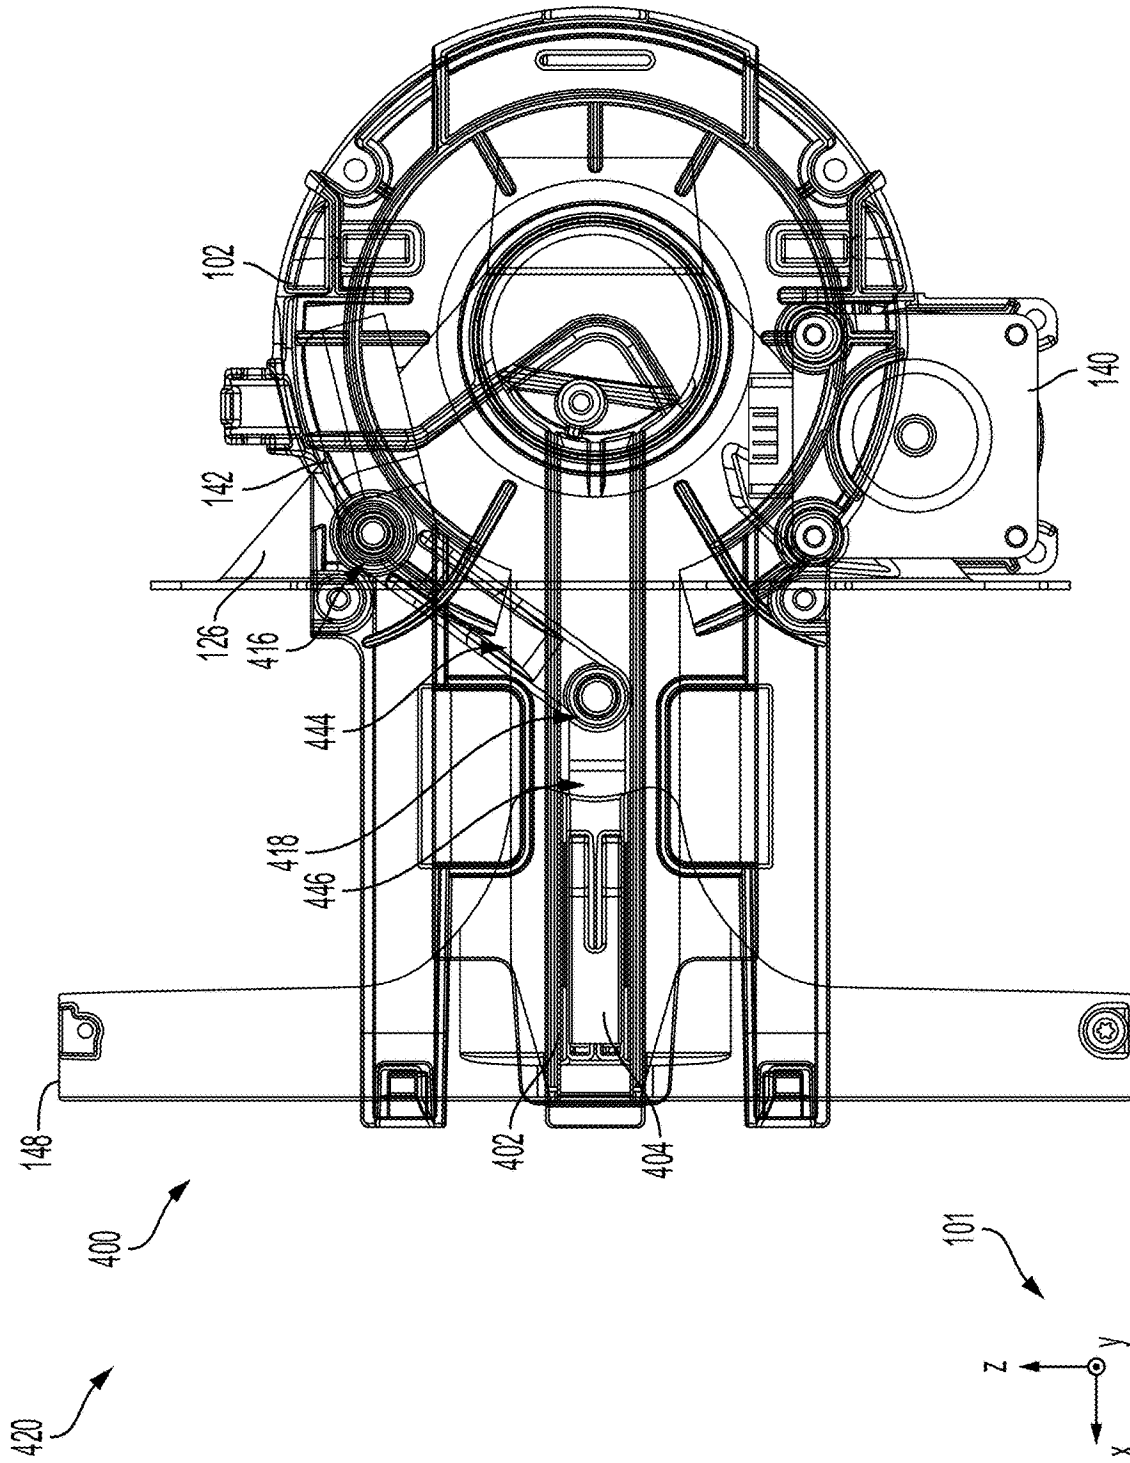


FIG. 4B

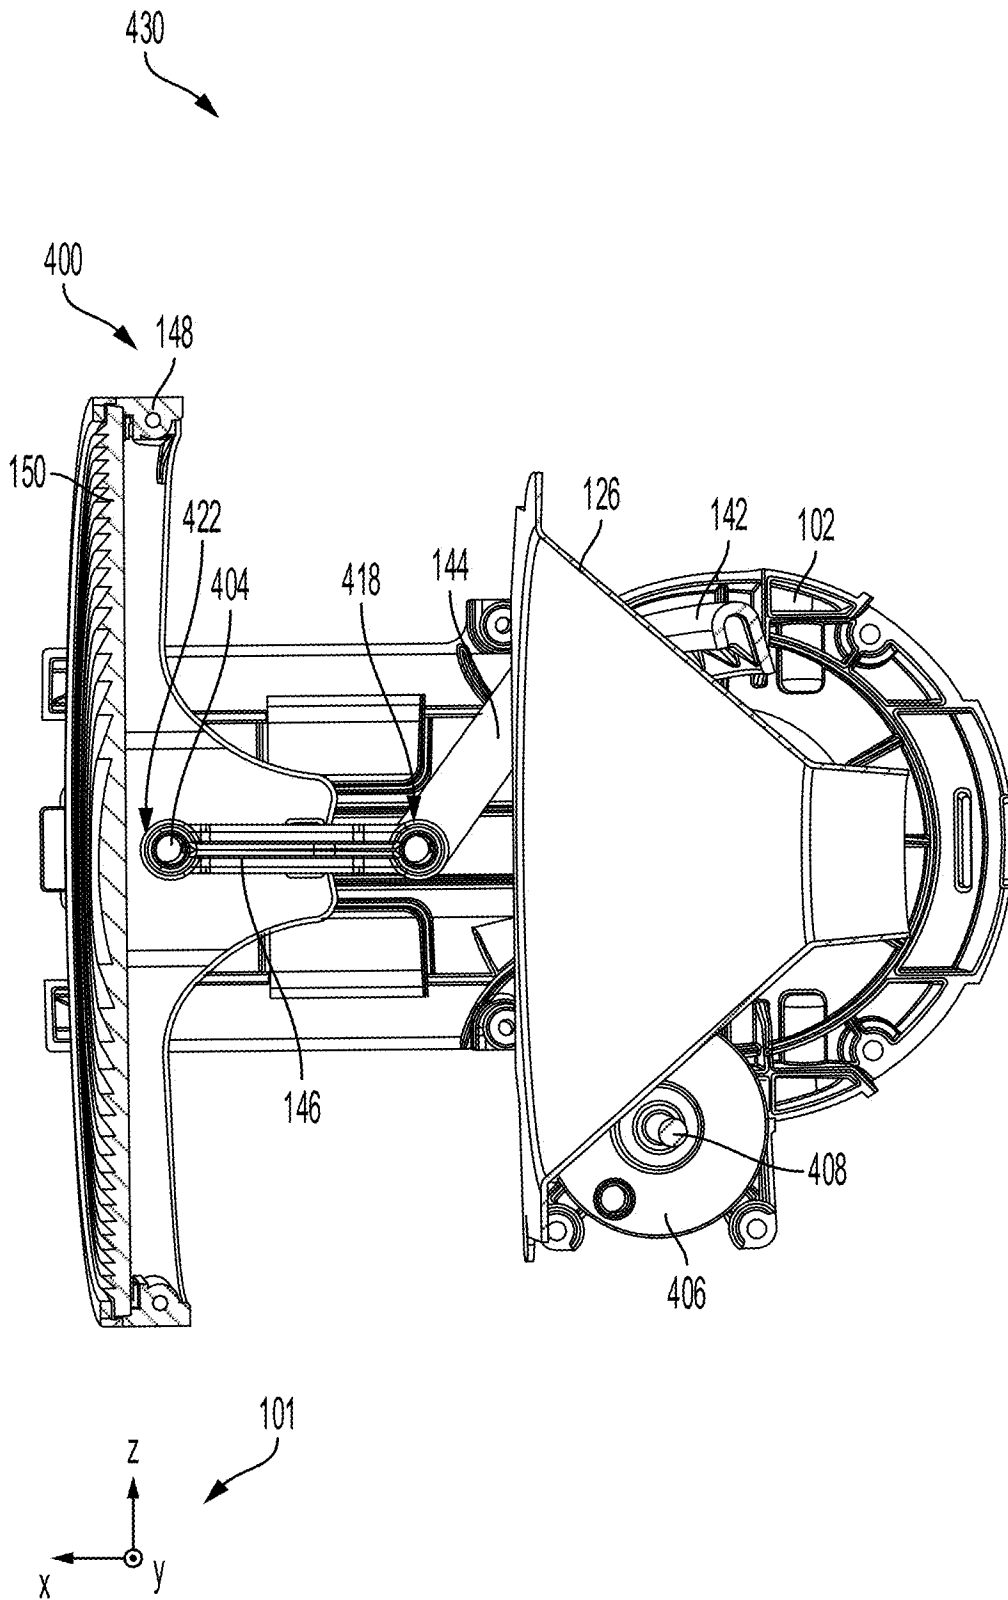


FIG. 4C

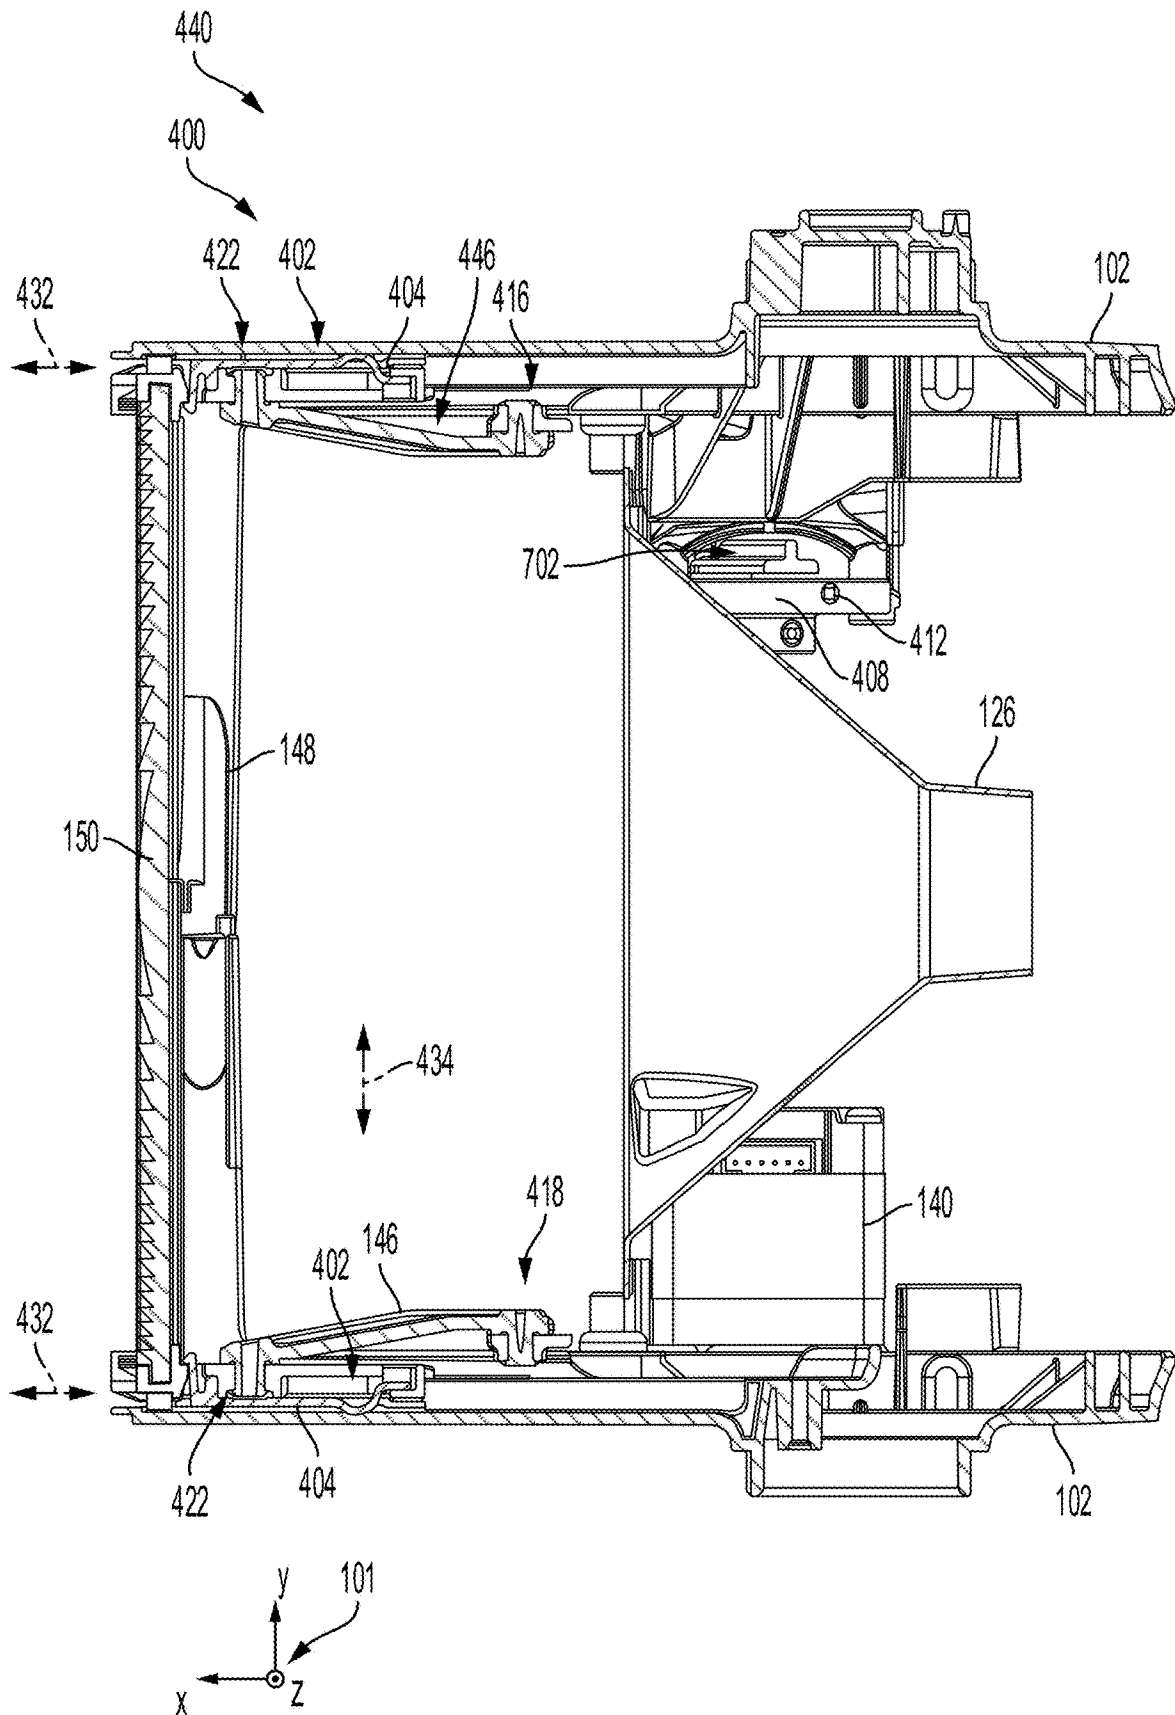


FIG. 4D

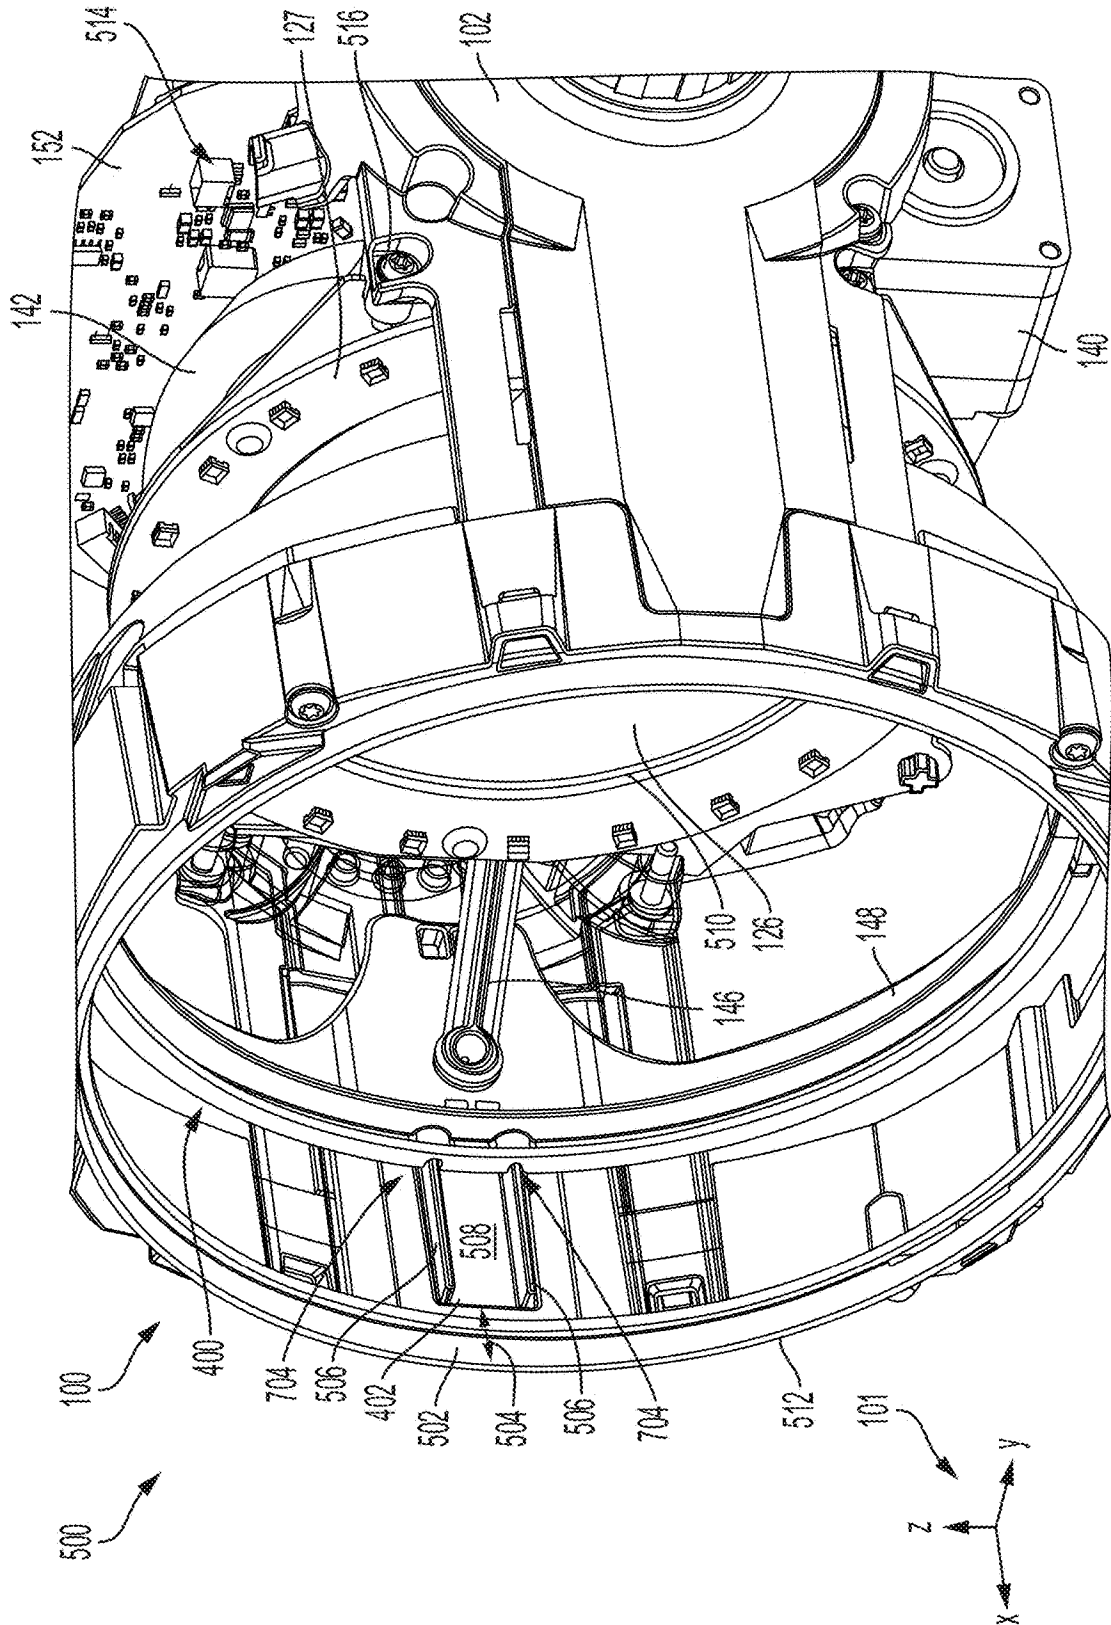
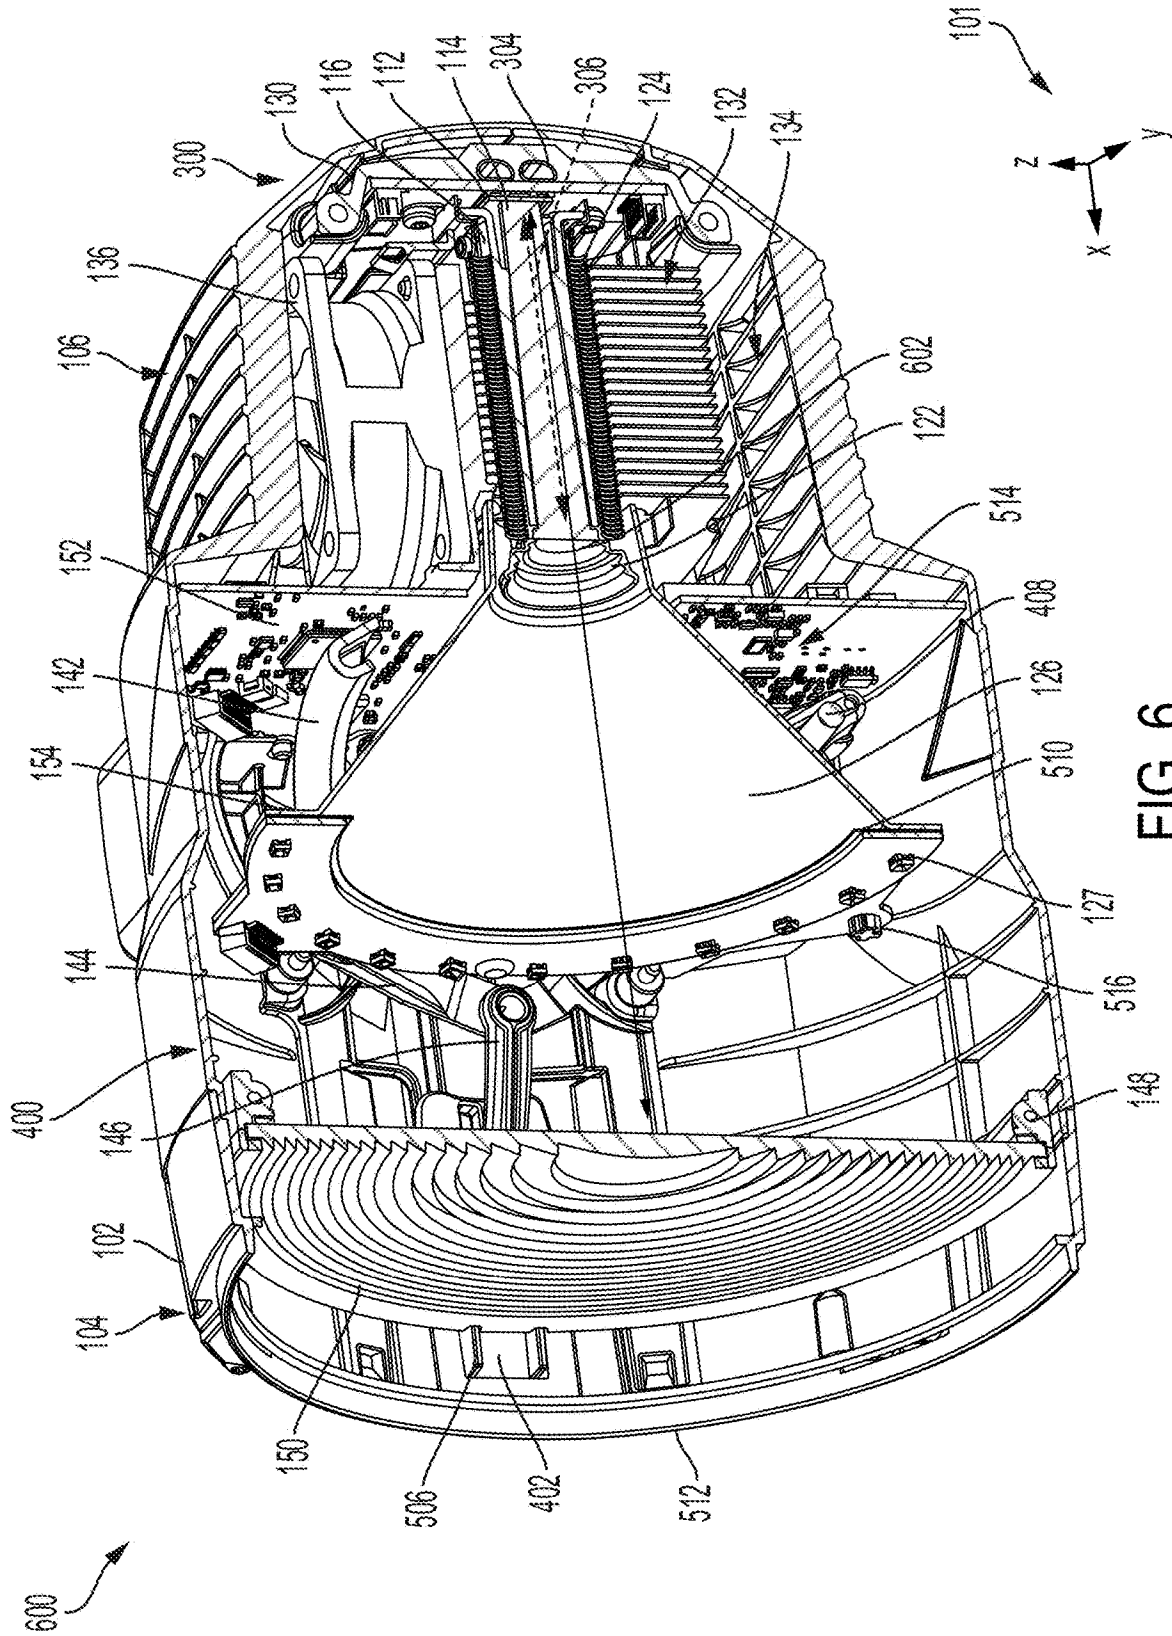


FIG. 5



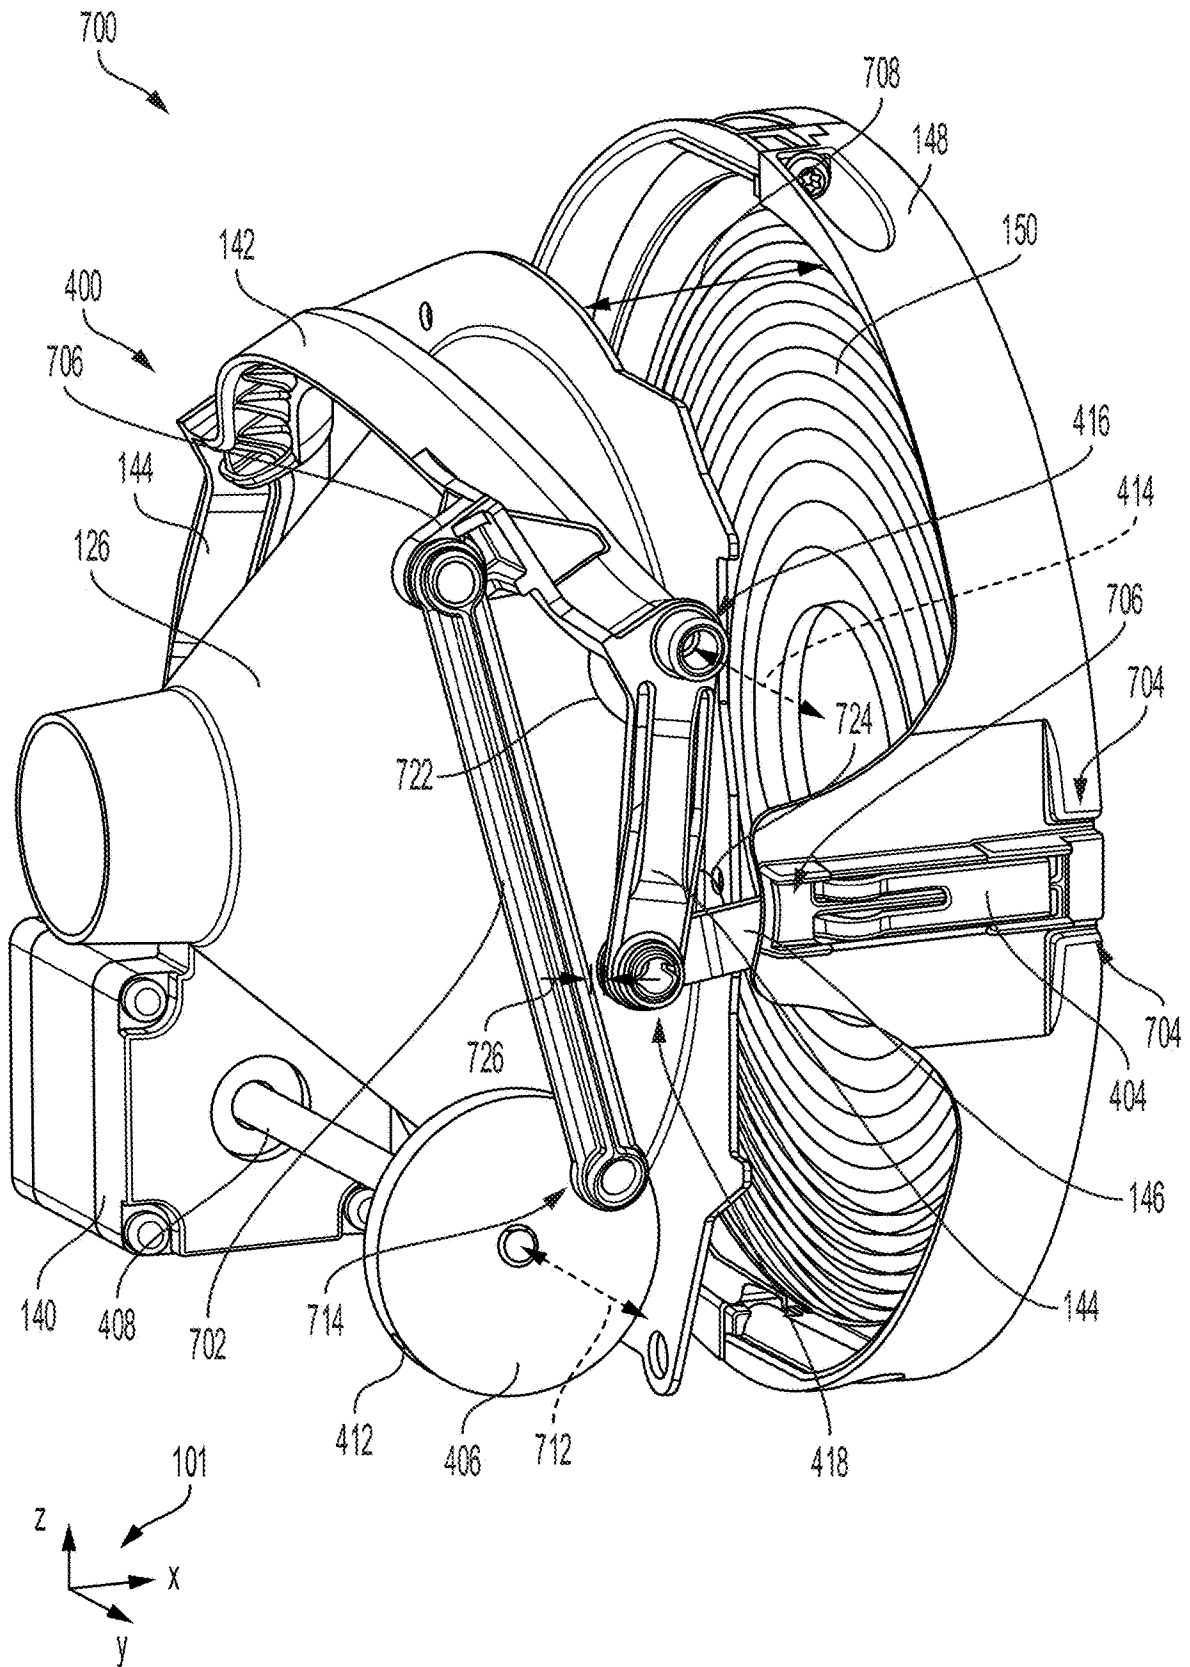


FIG. 7

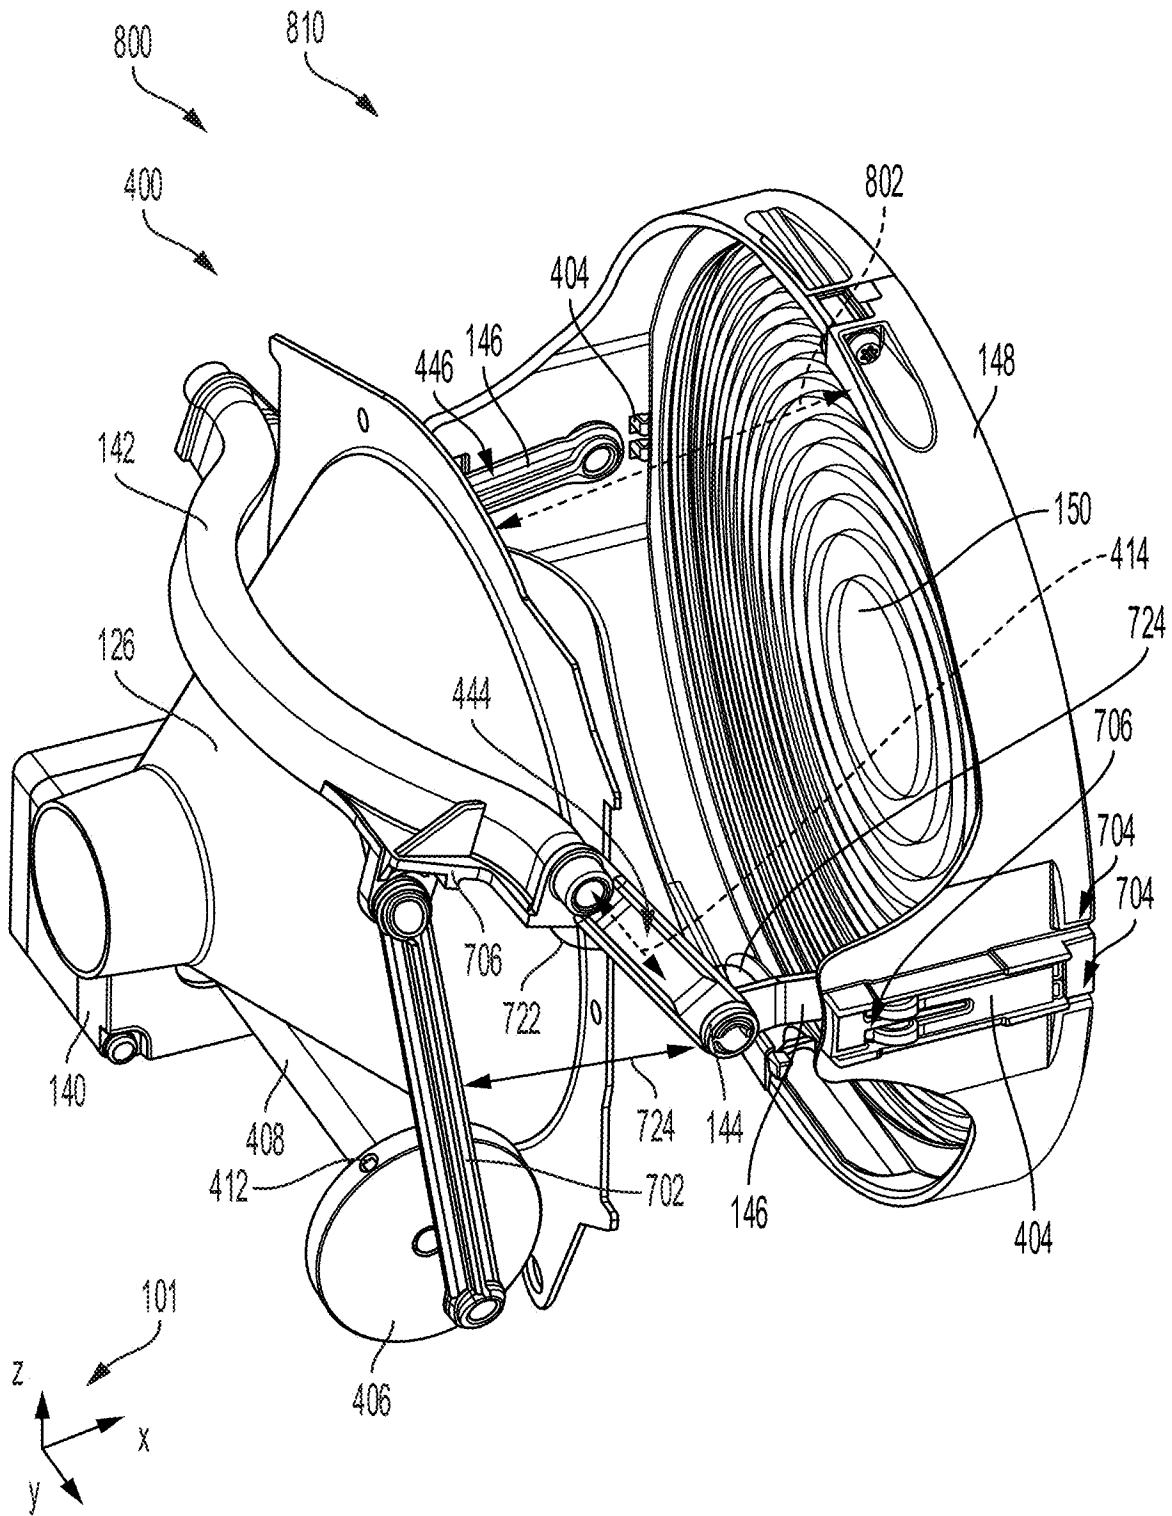


FIG. 8A

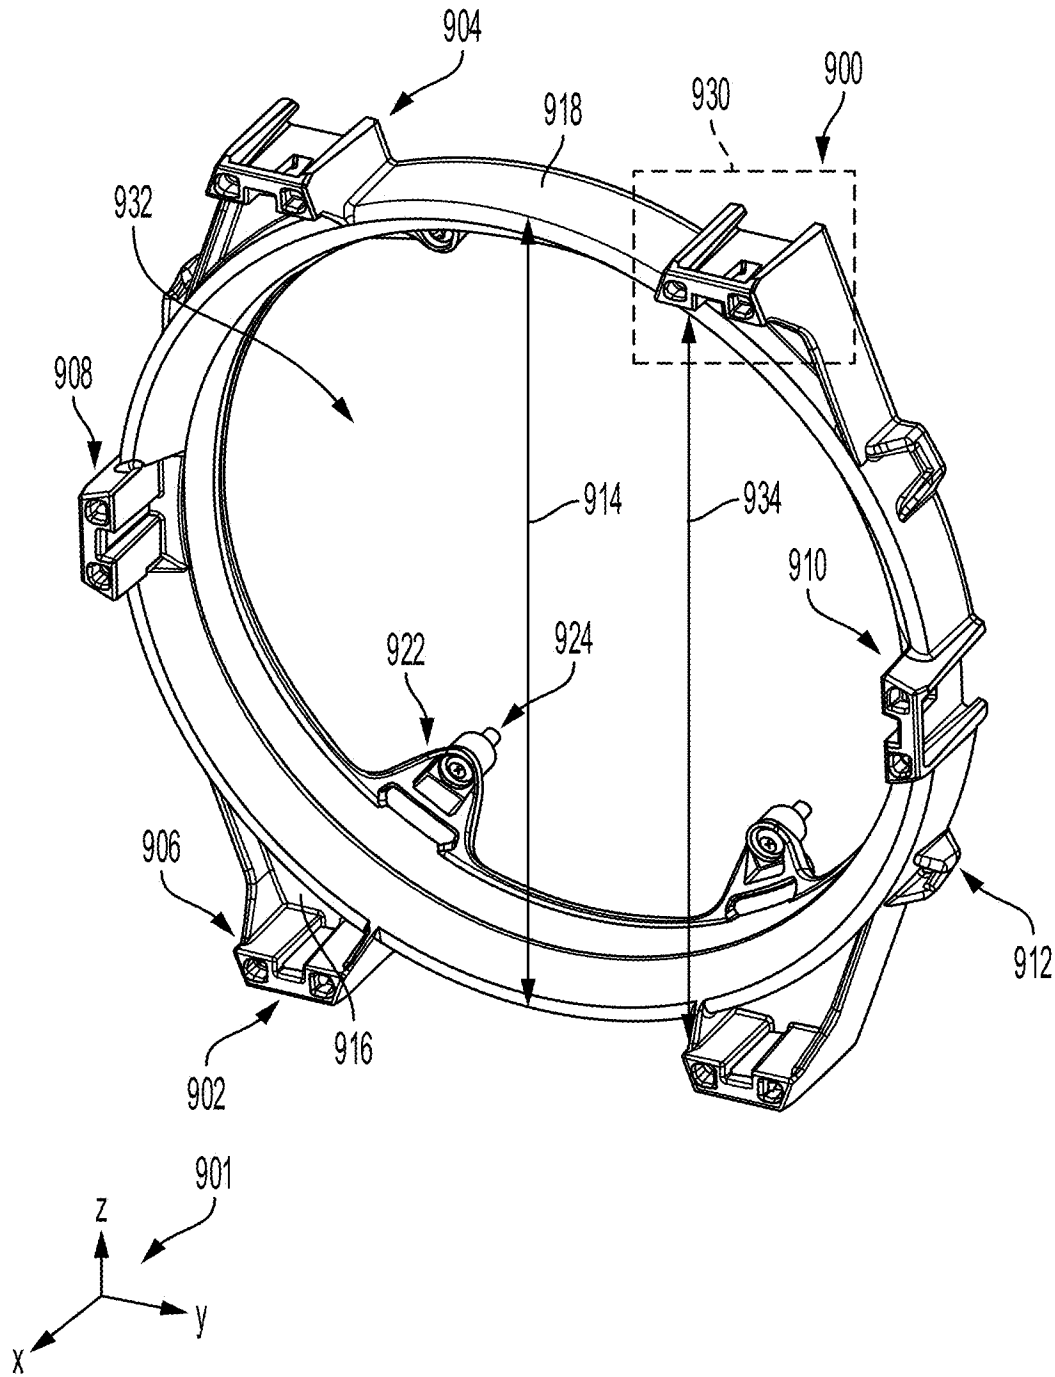


FIG. 9

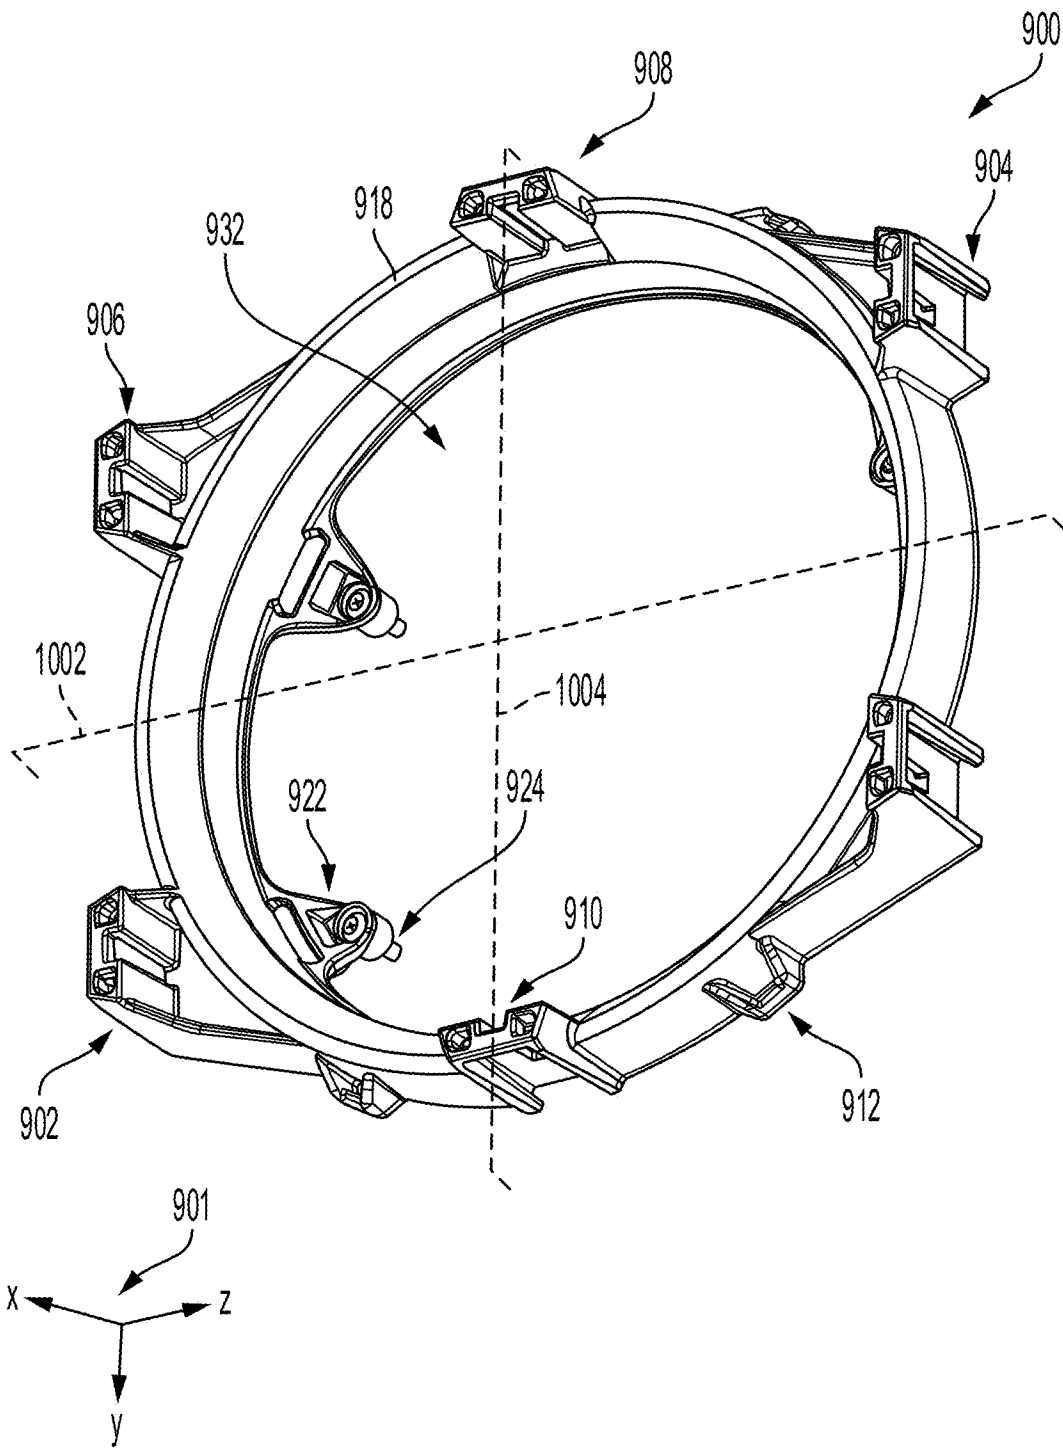
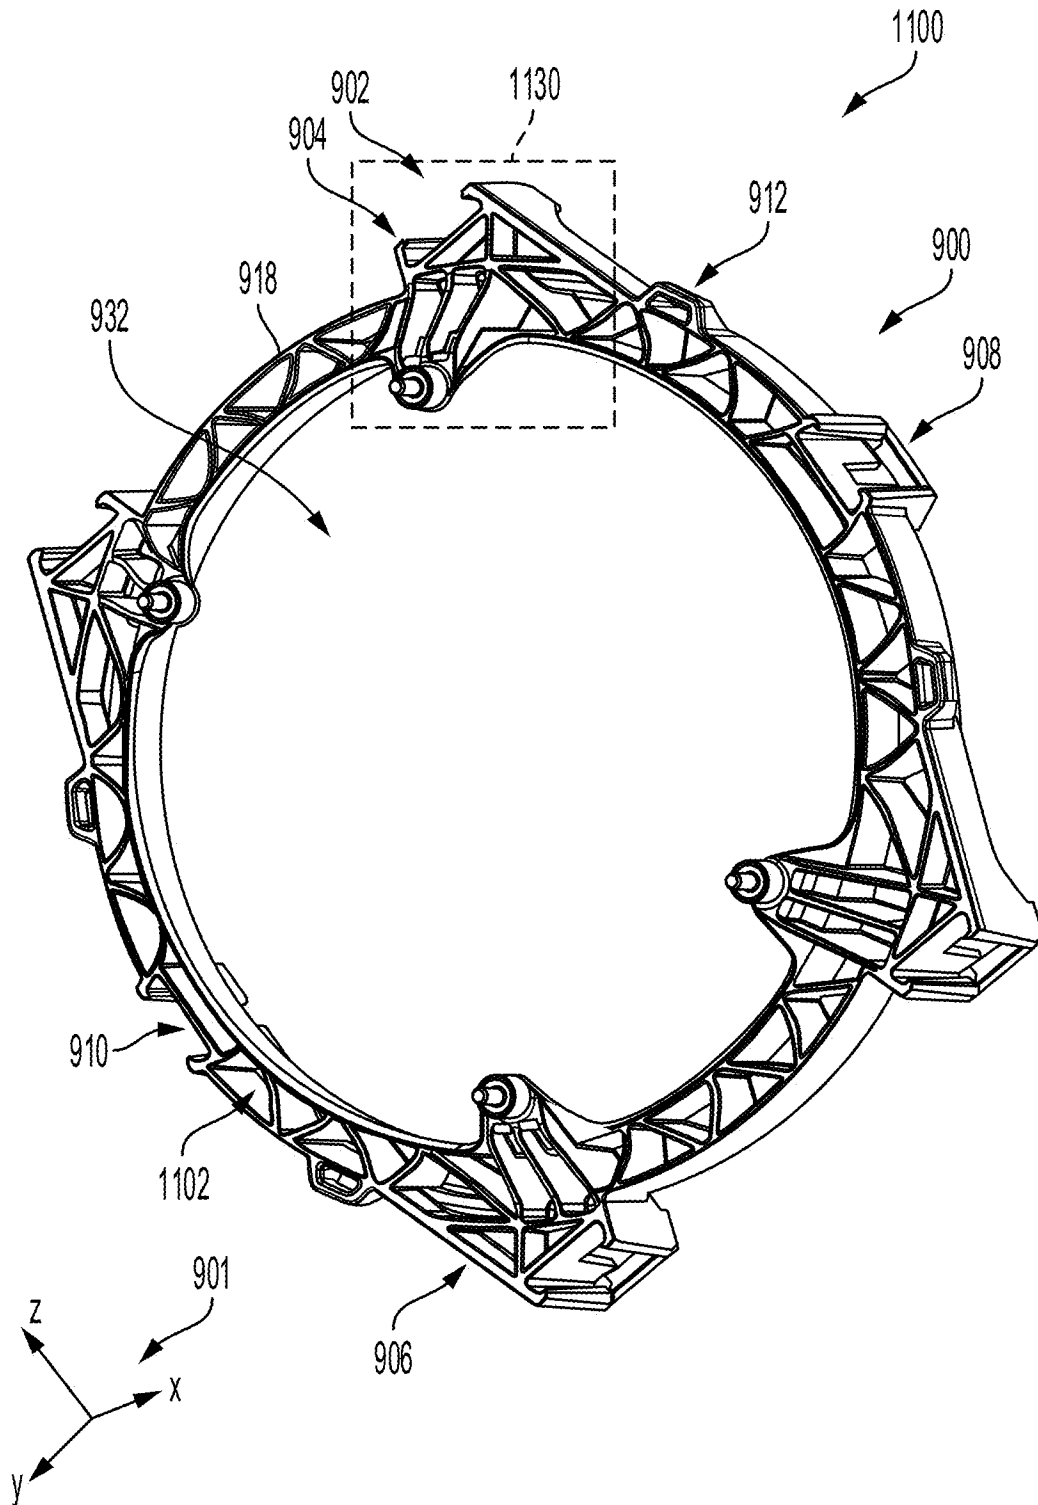
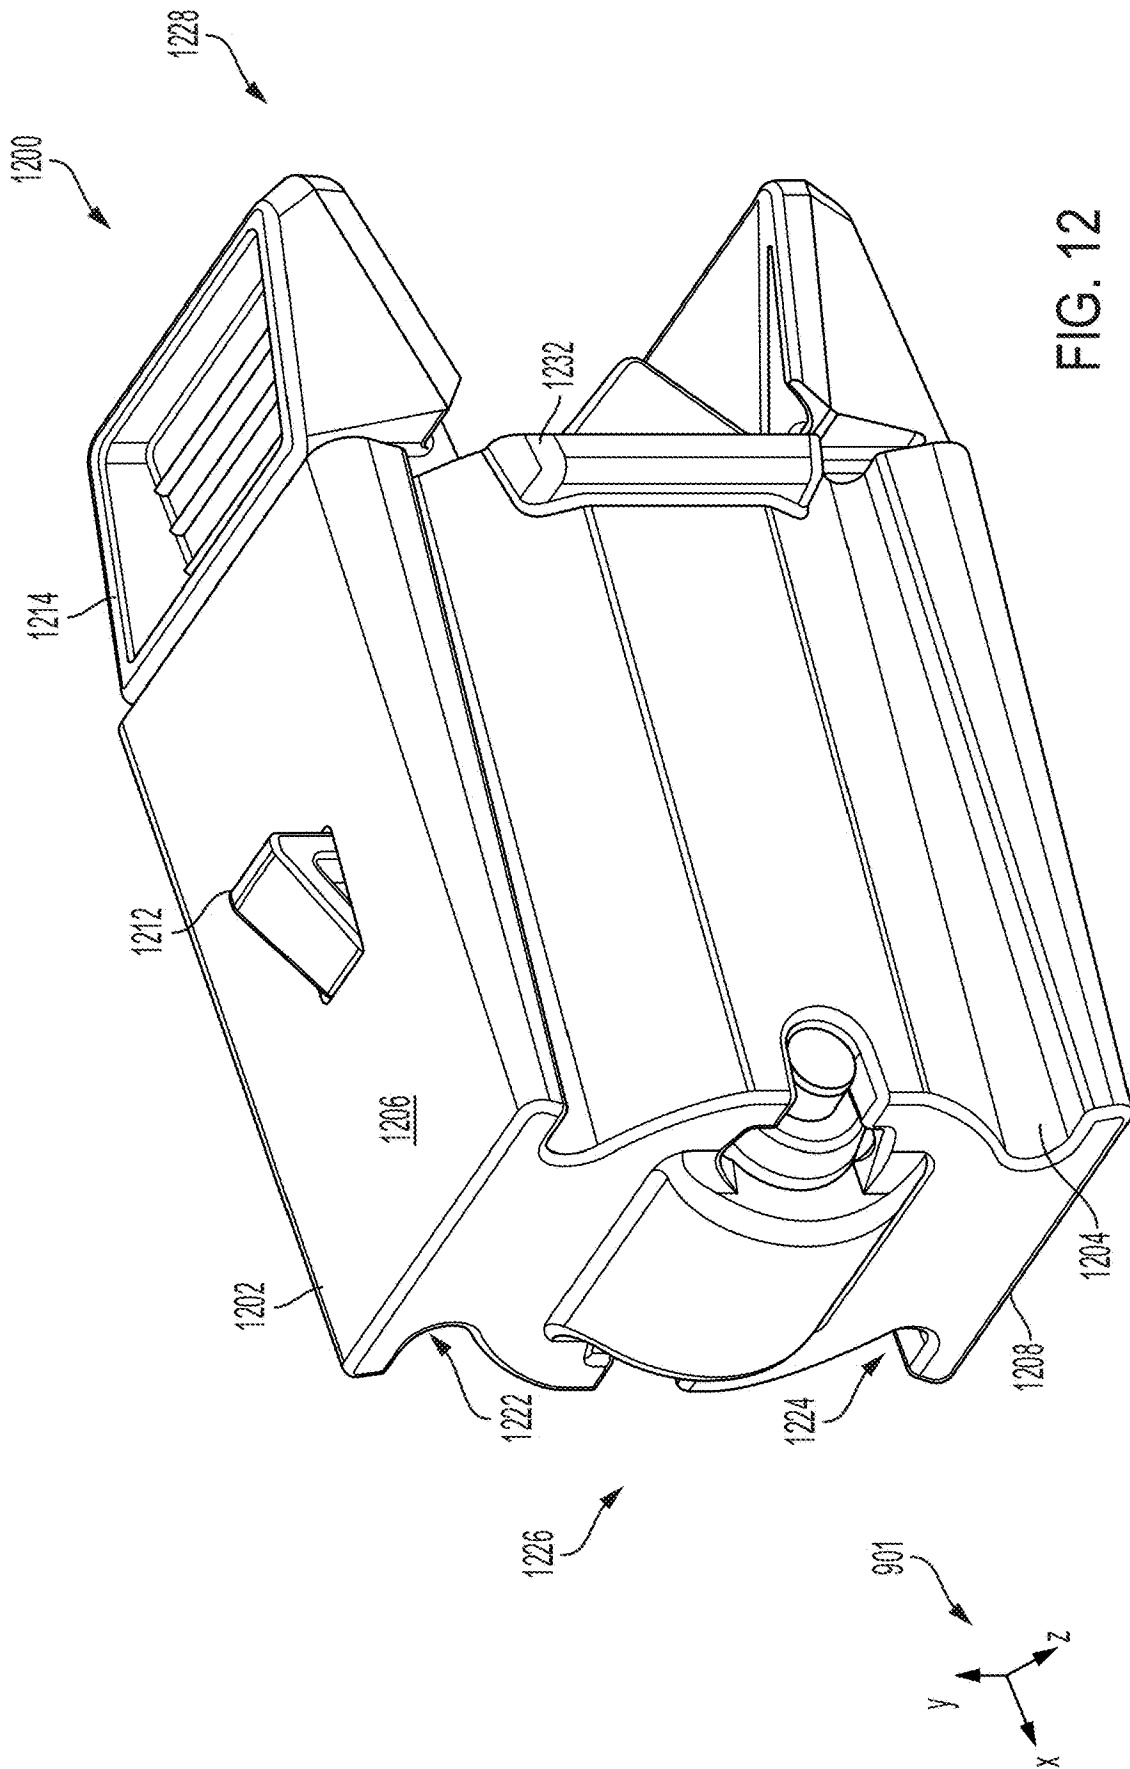


FIG. 10





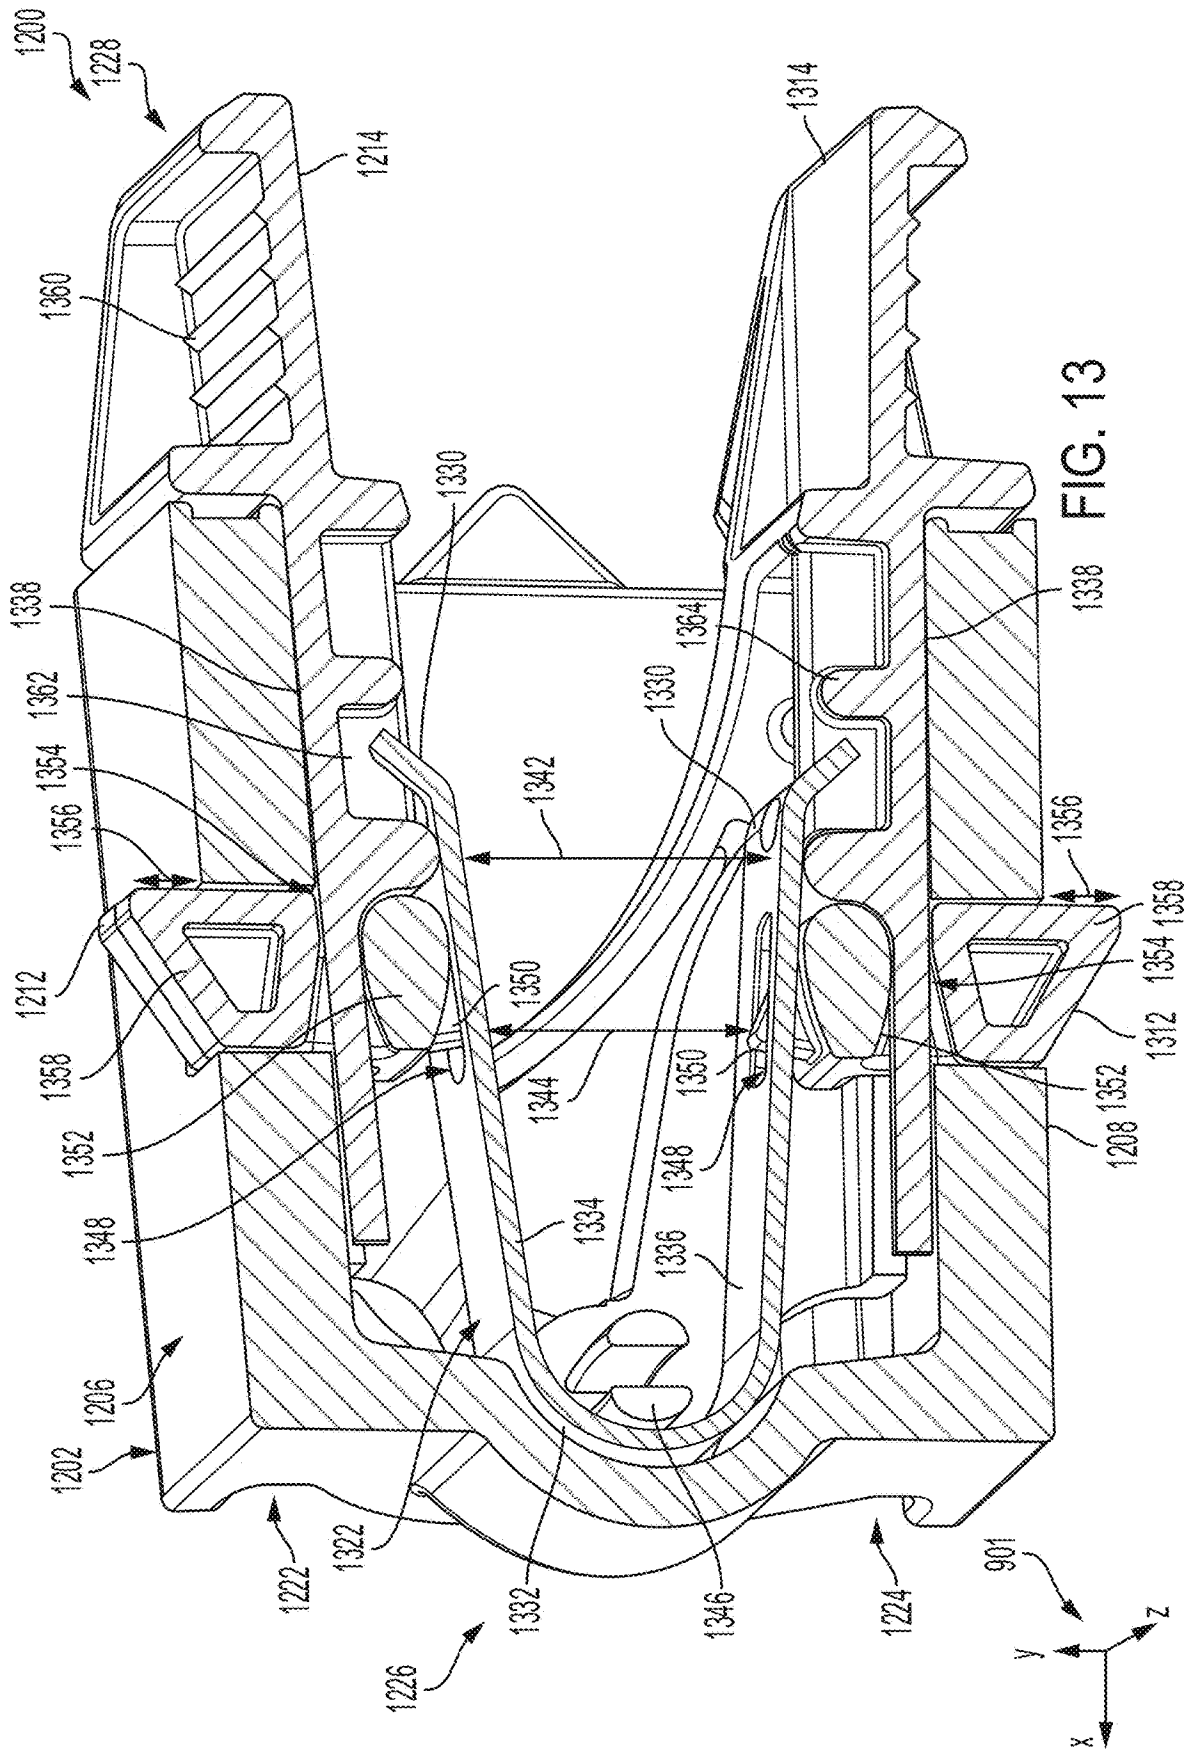


FIG. 13

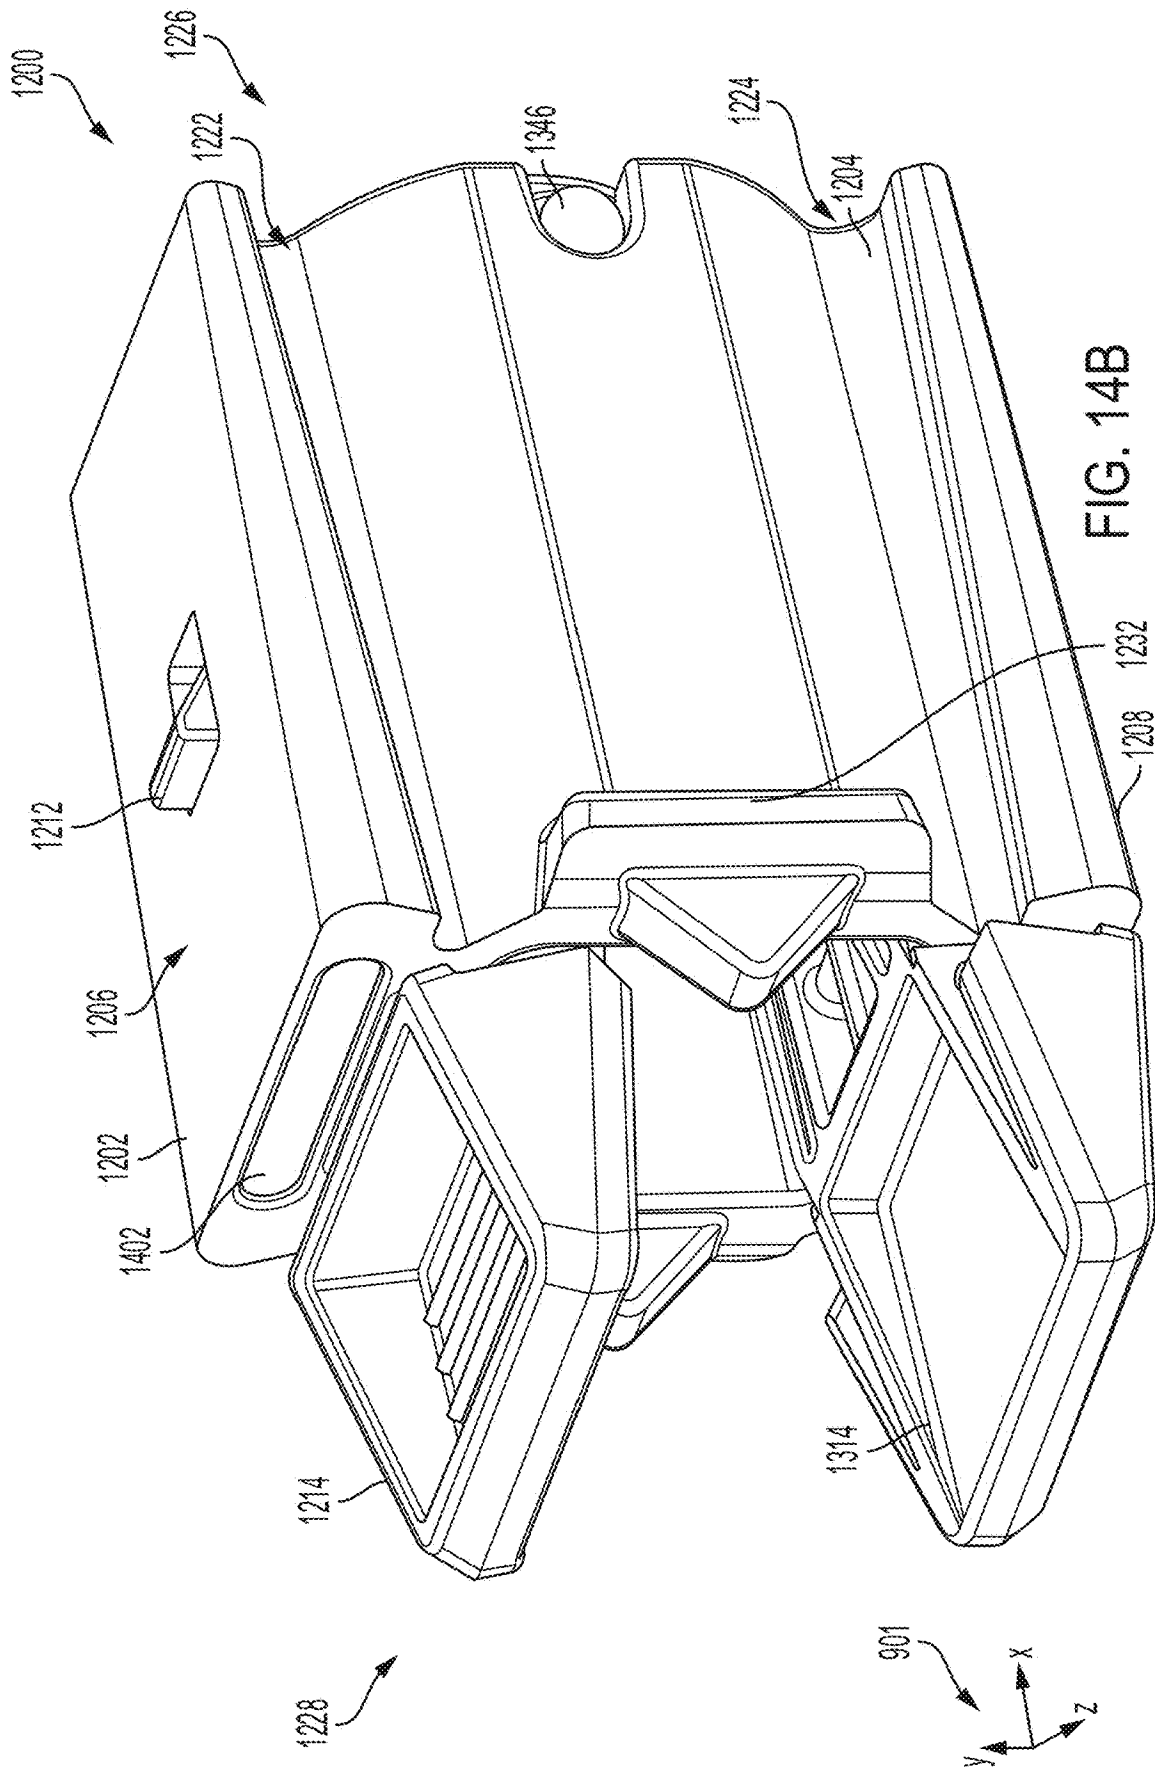


FIG. 14B

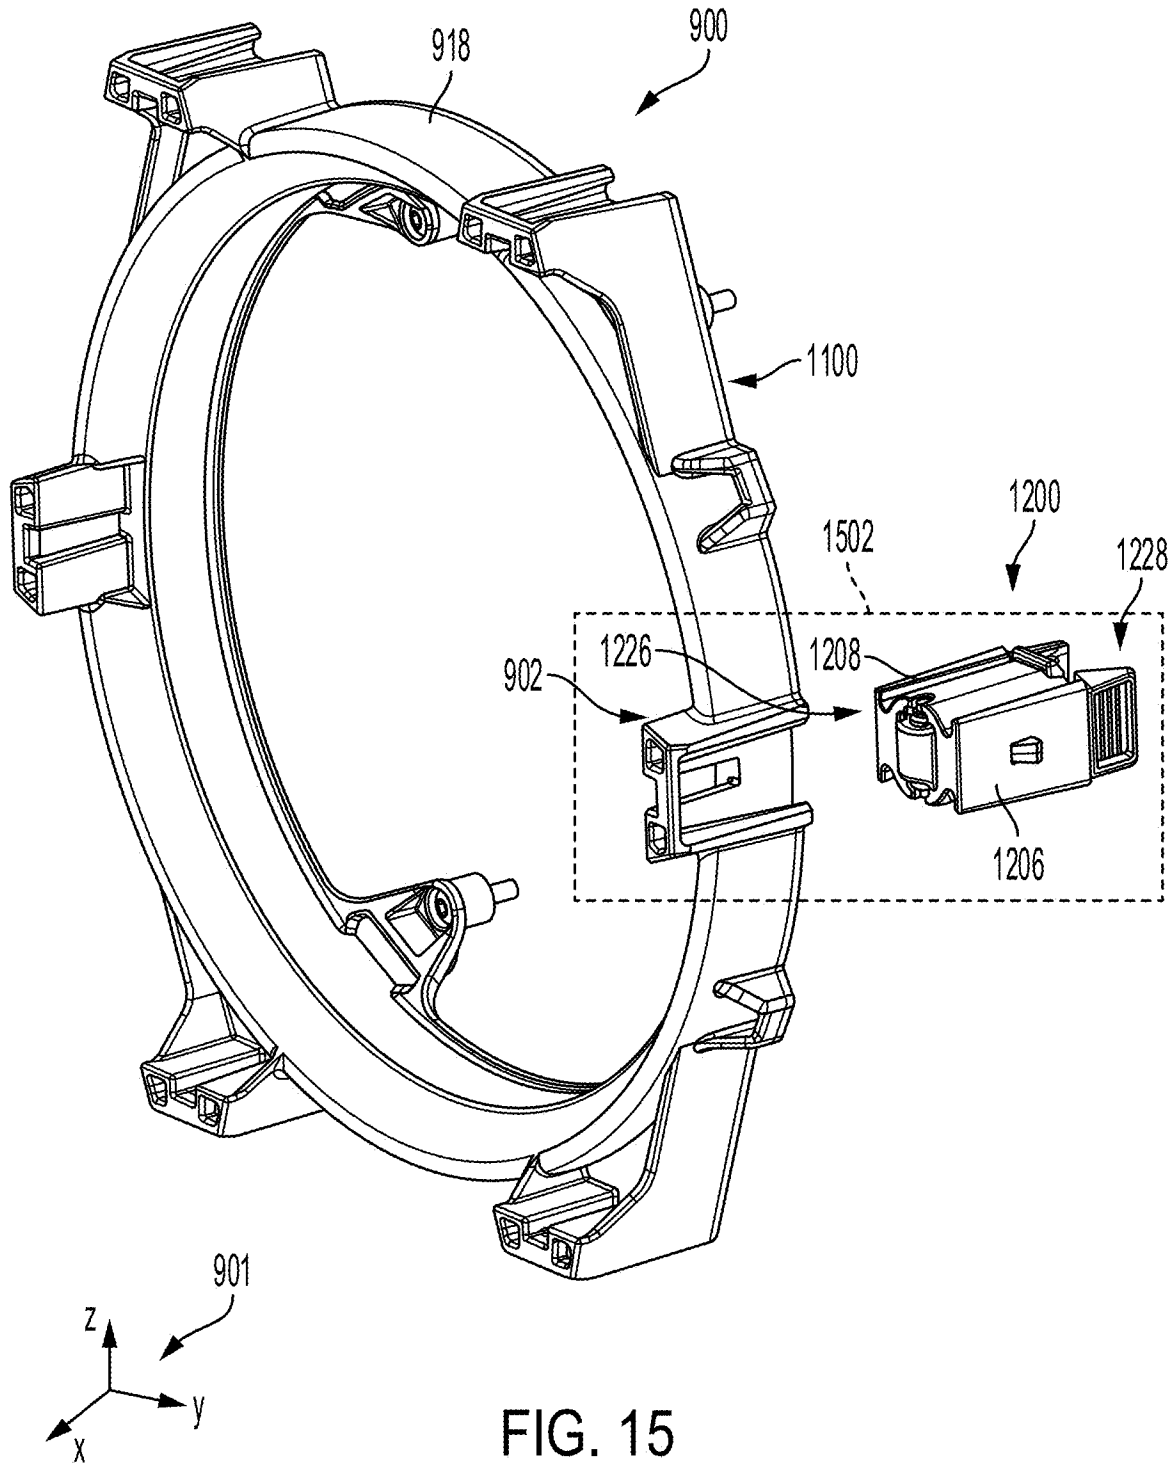


FIG. 15

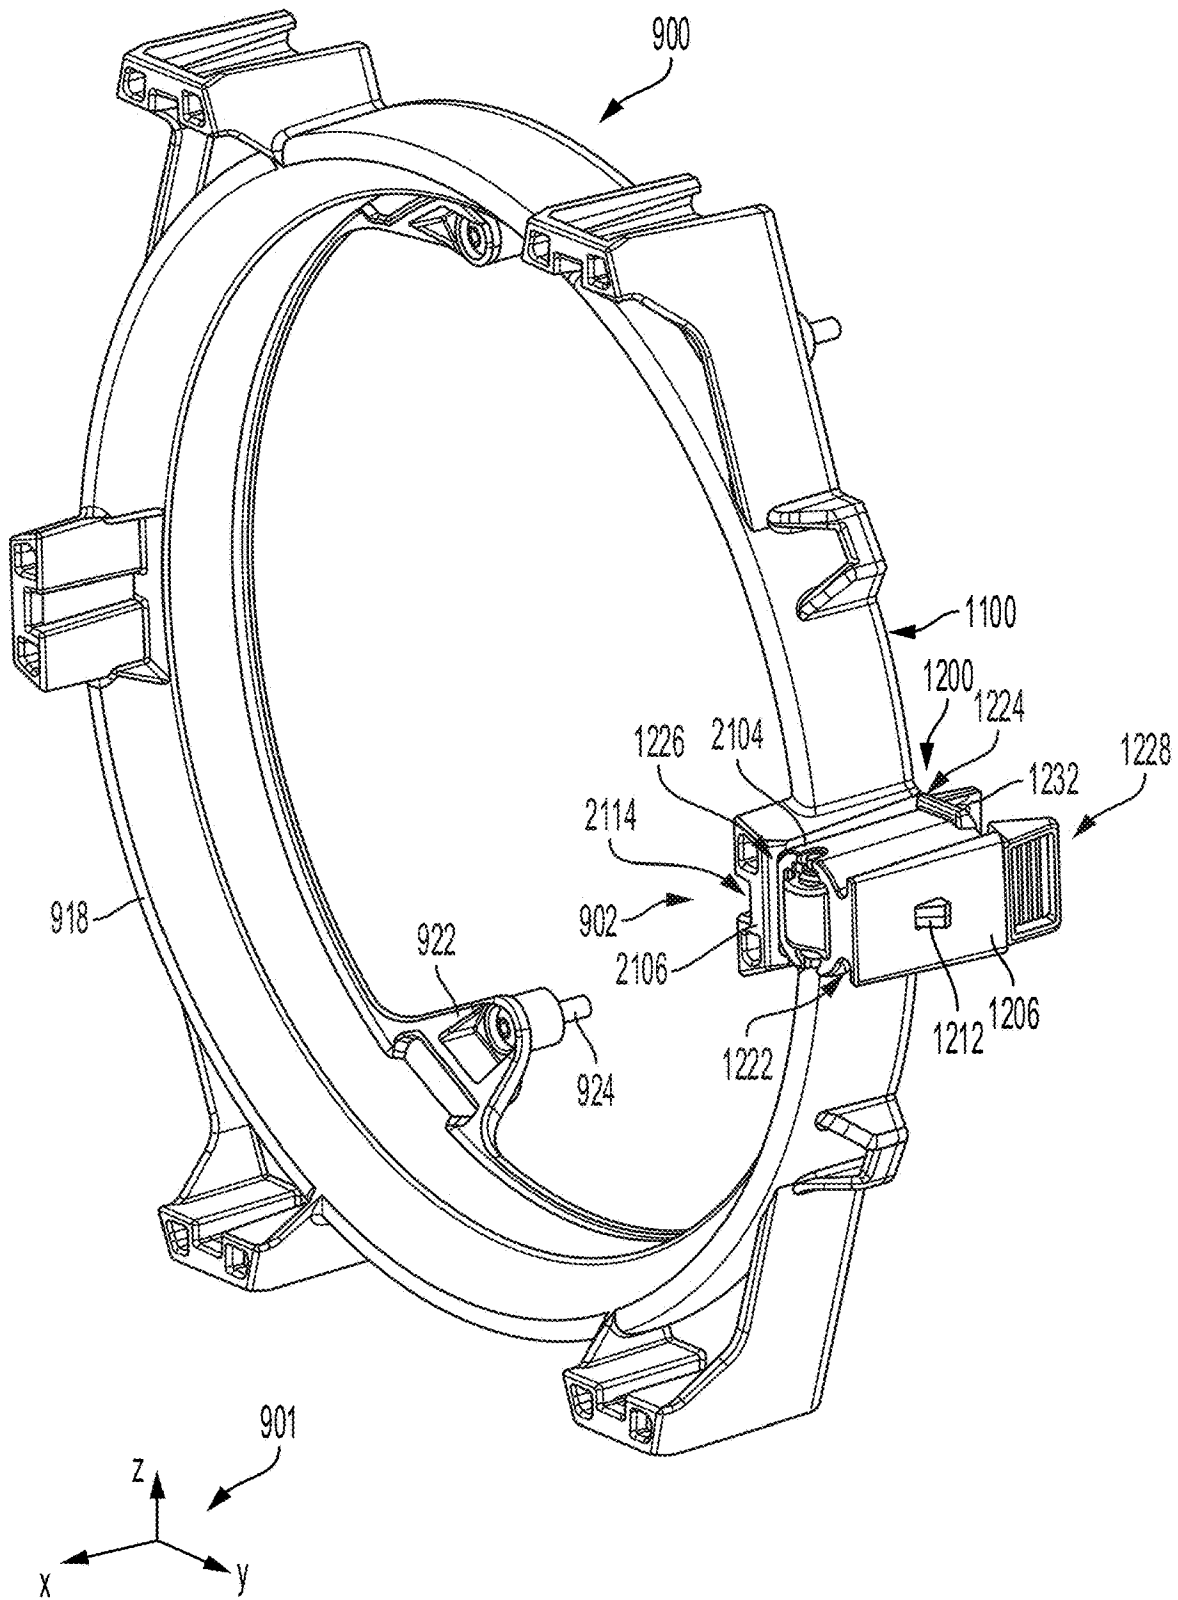


FIG. 16

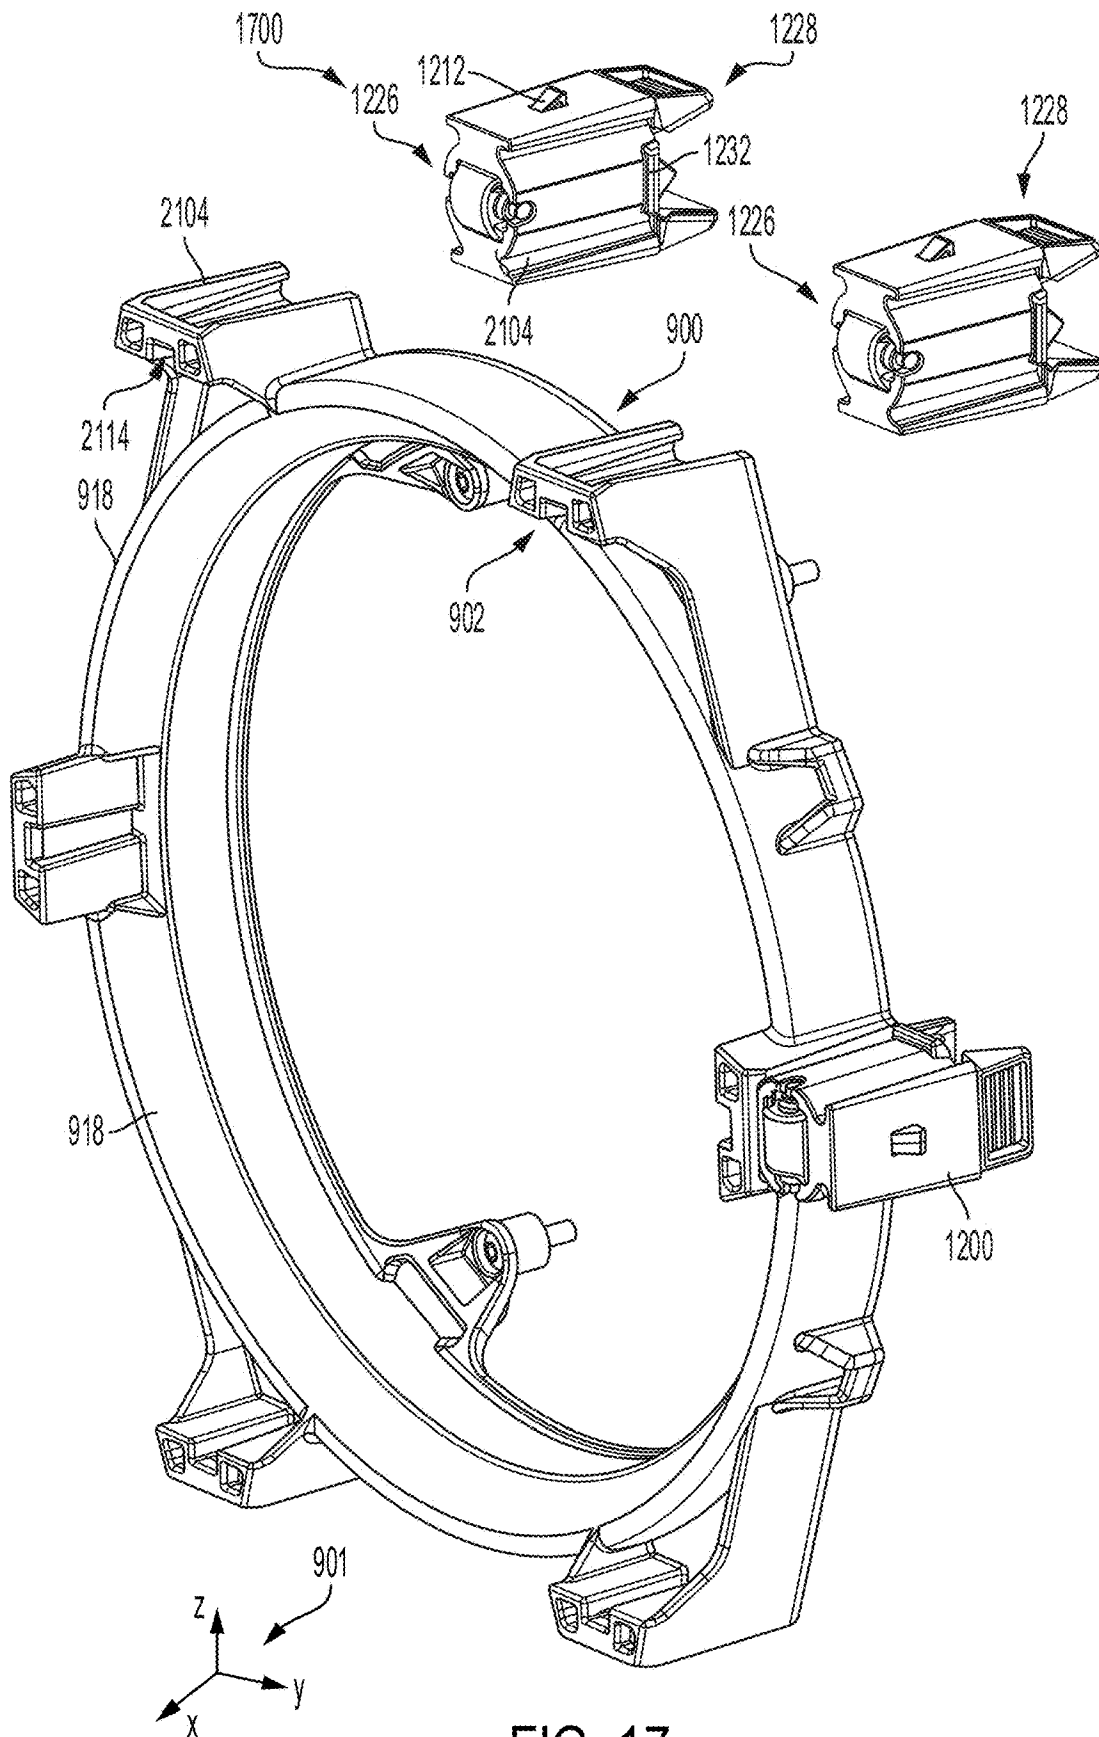


FIG. 17

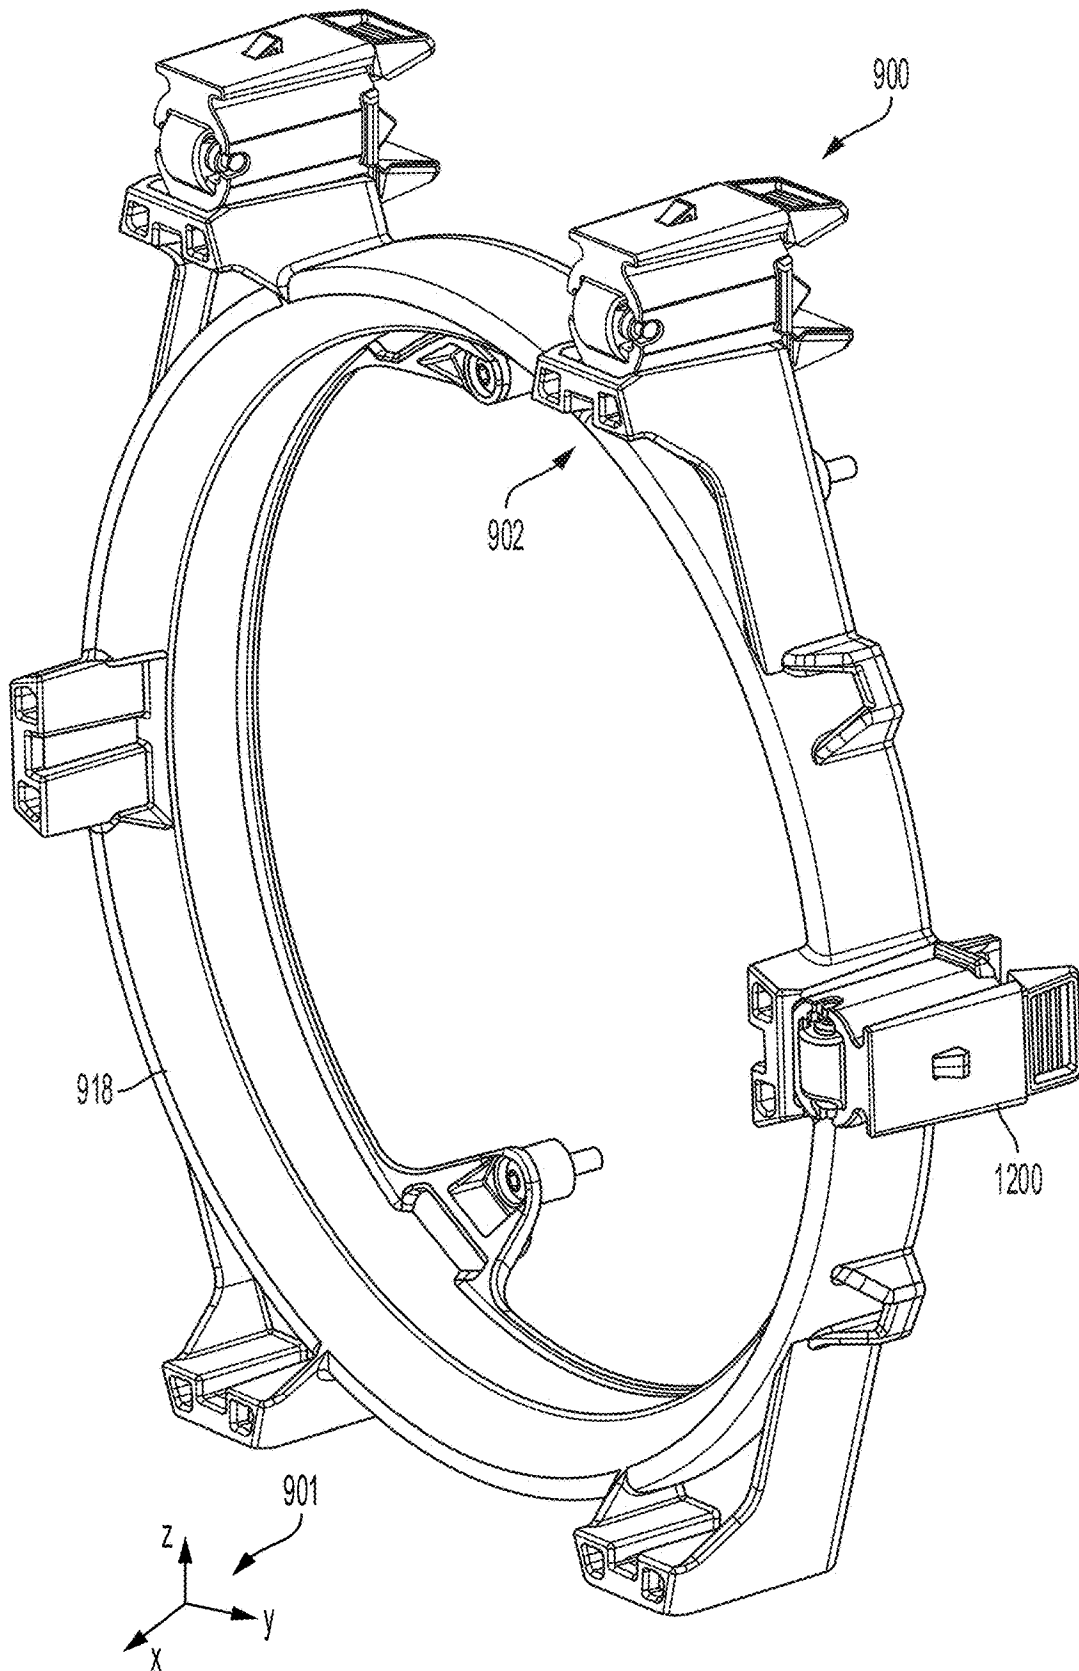
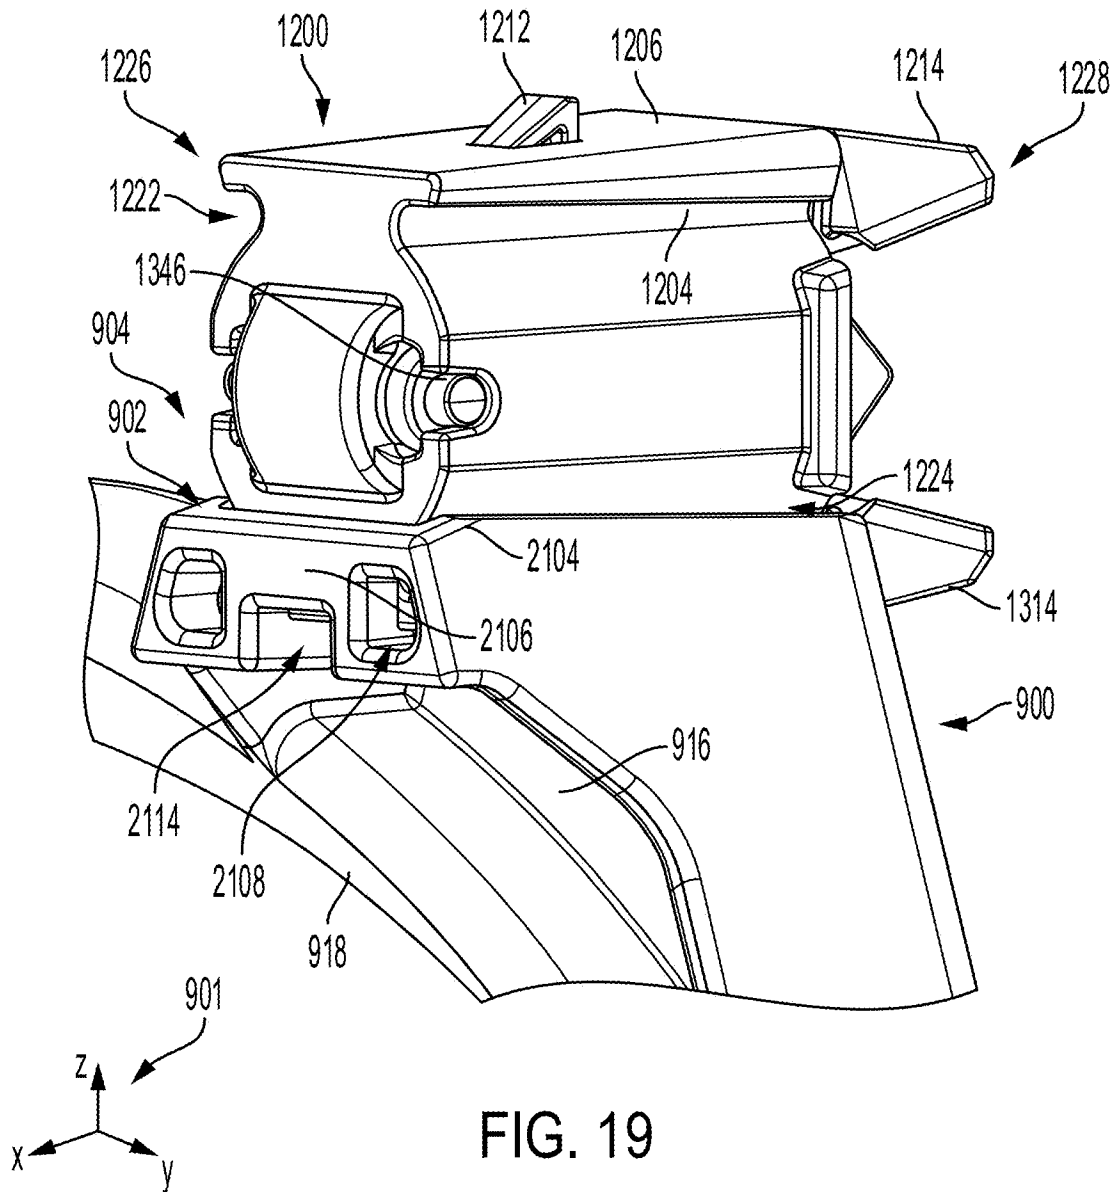


FIG. 18



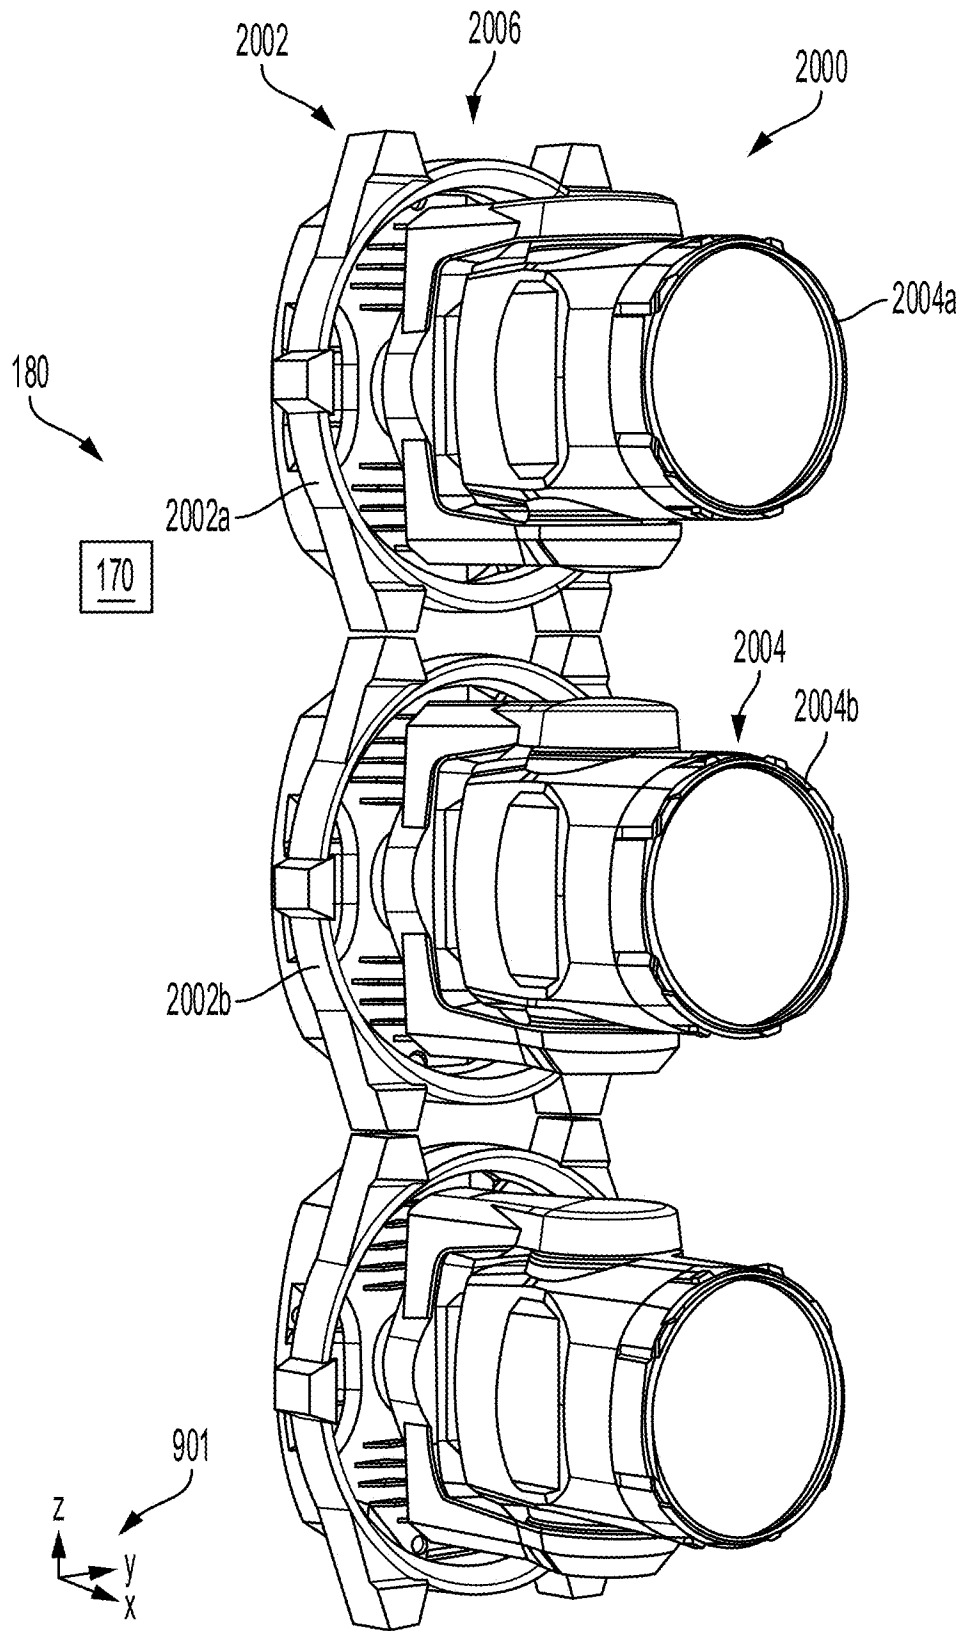


FIG. 20

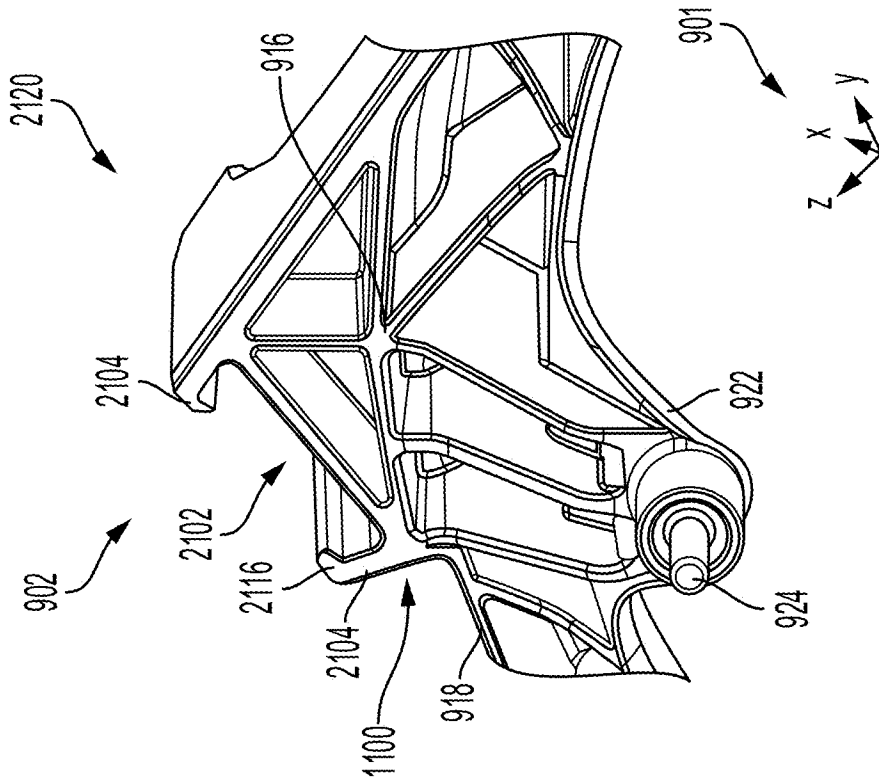


FIG. 21B

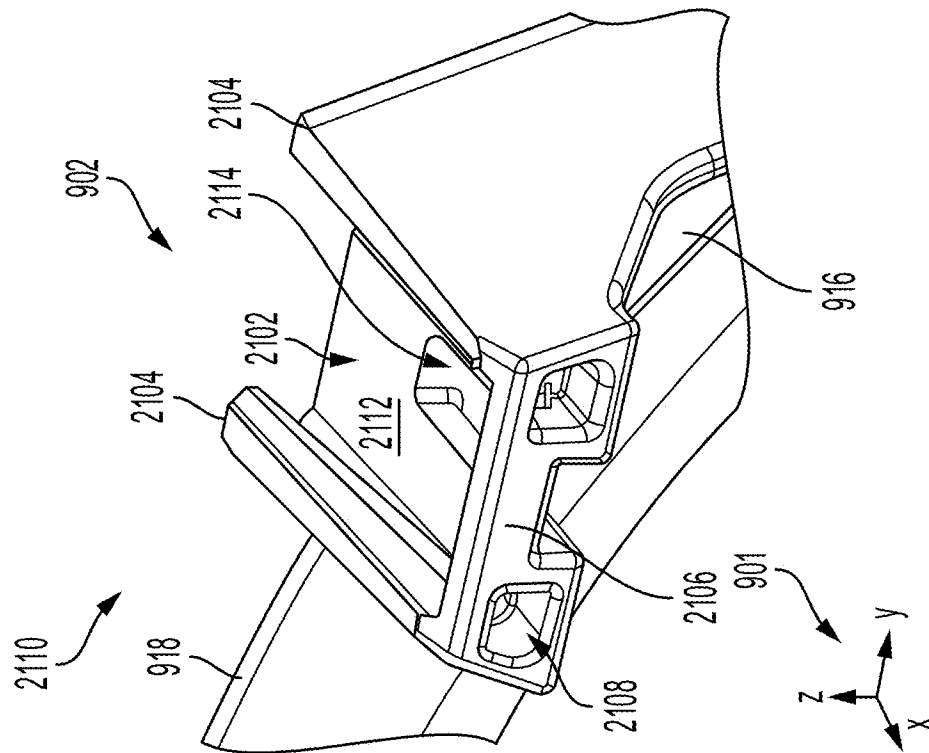
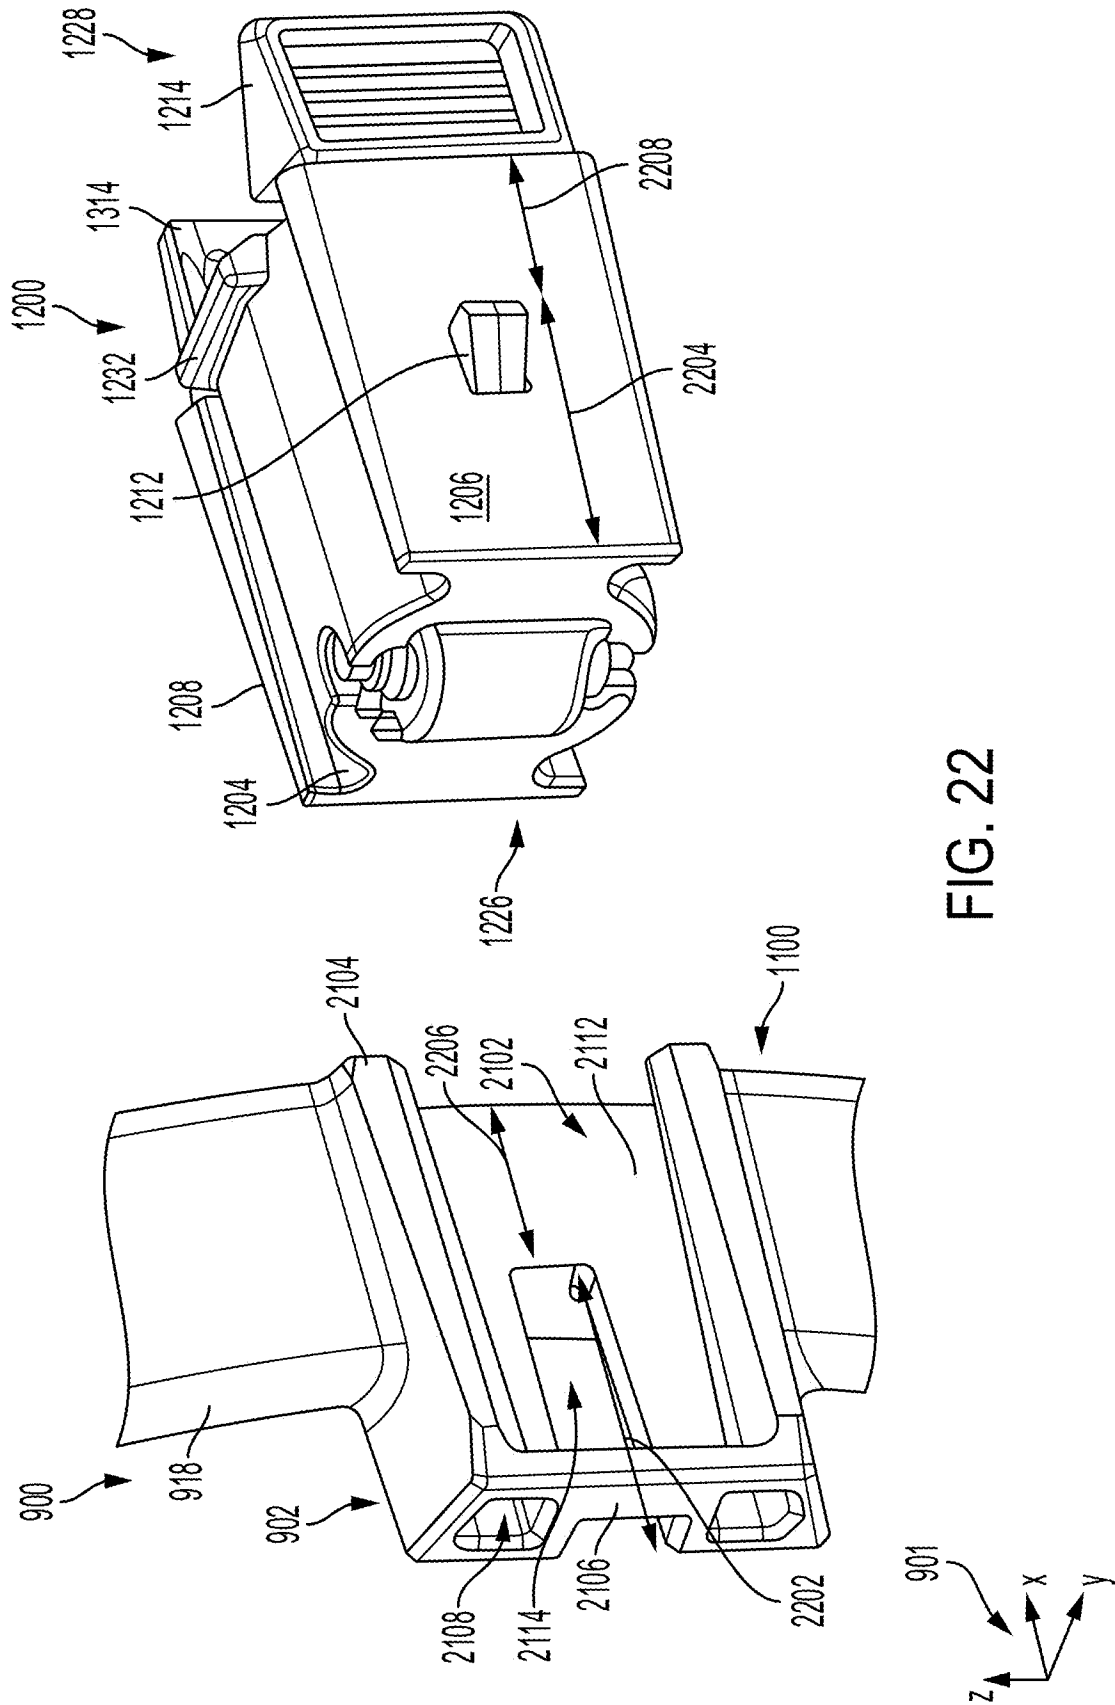


FIG. 21A



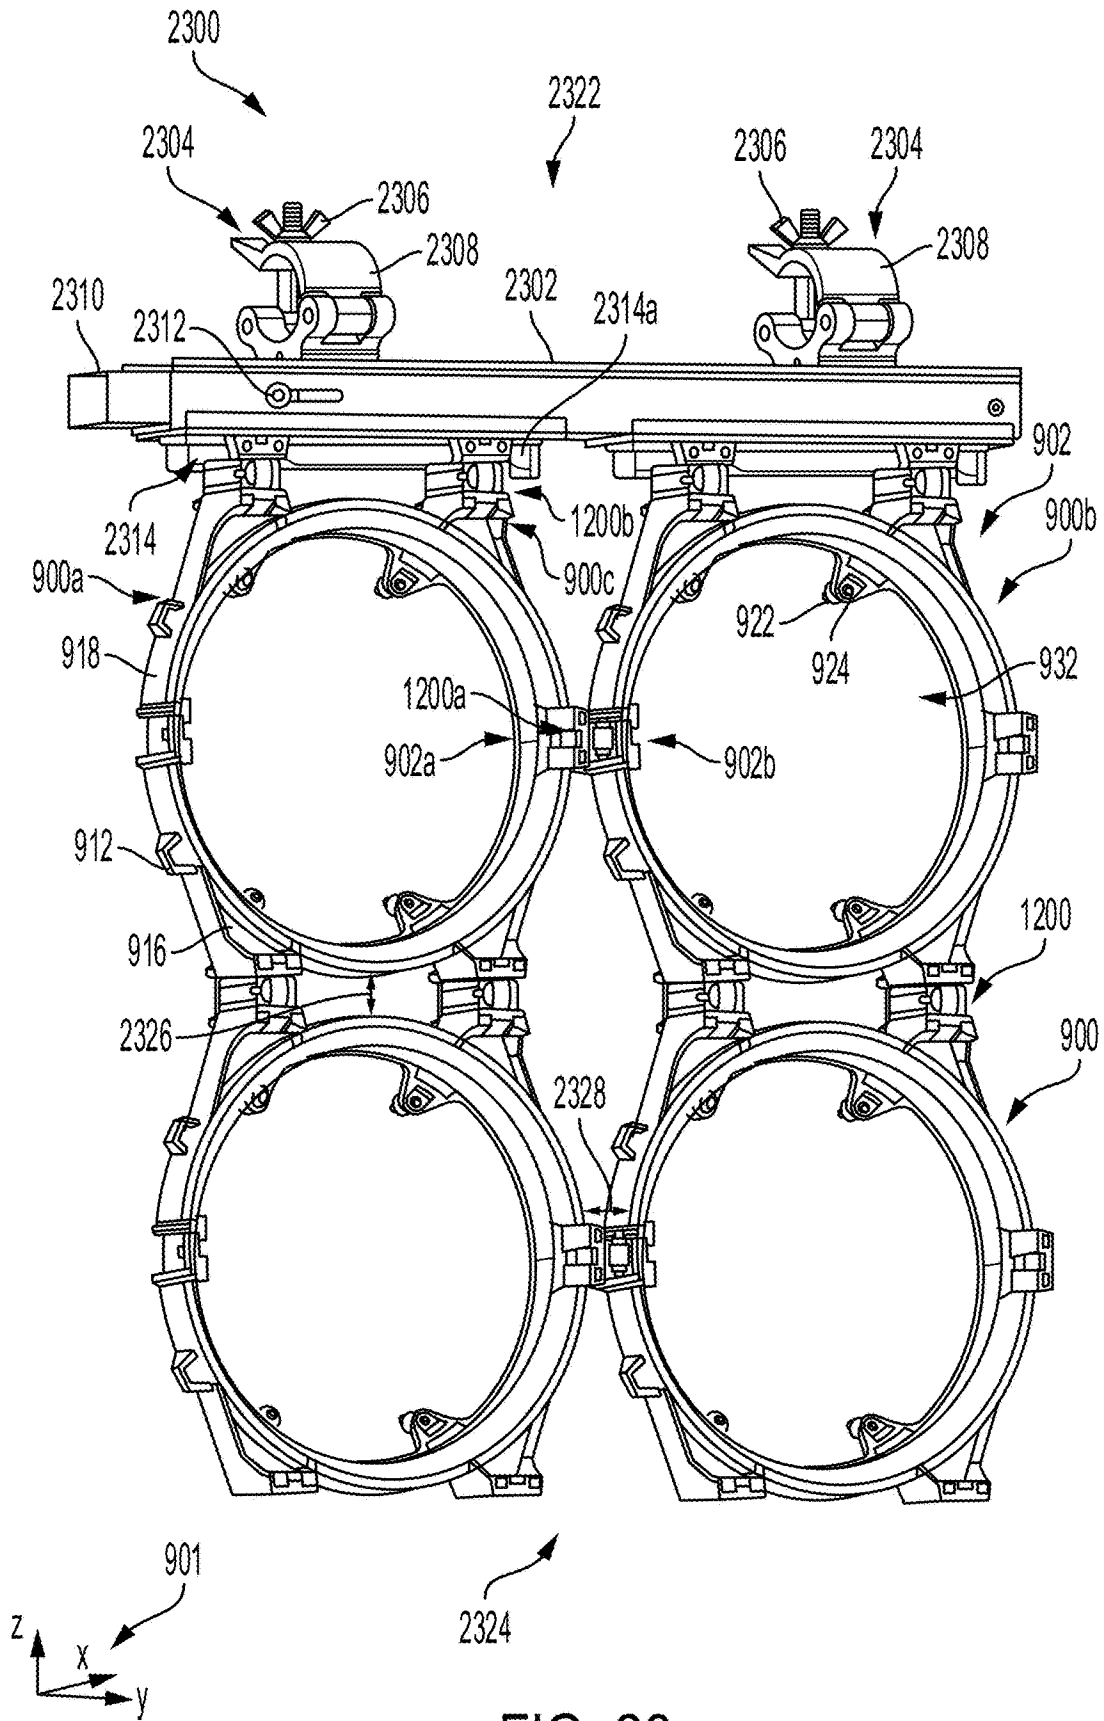


FIG. 23

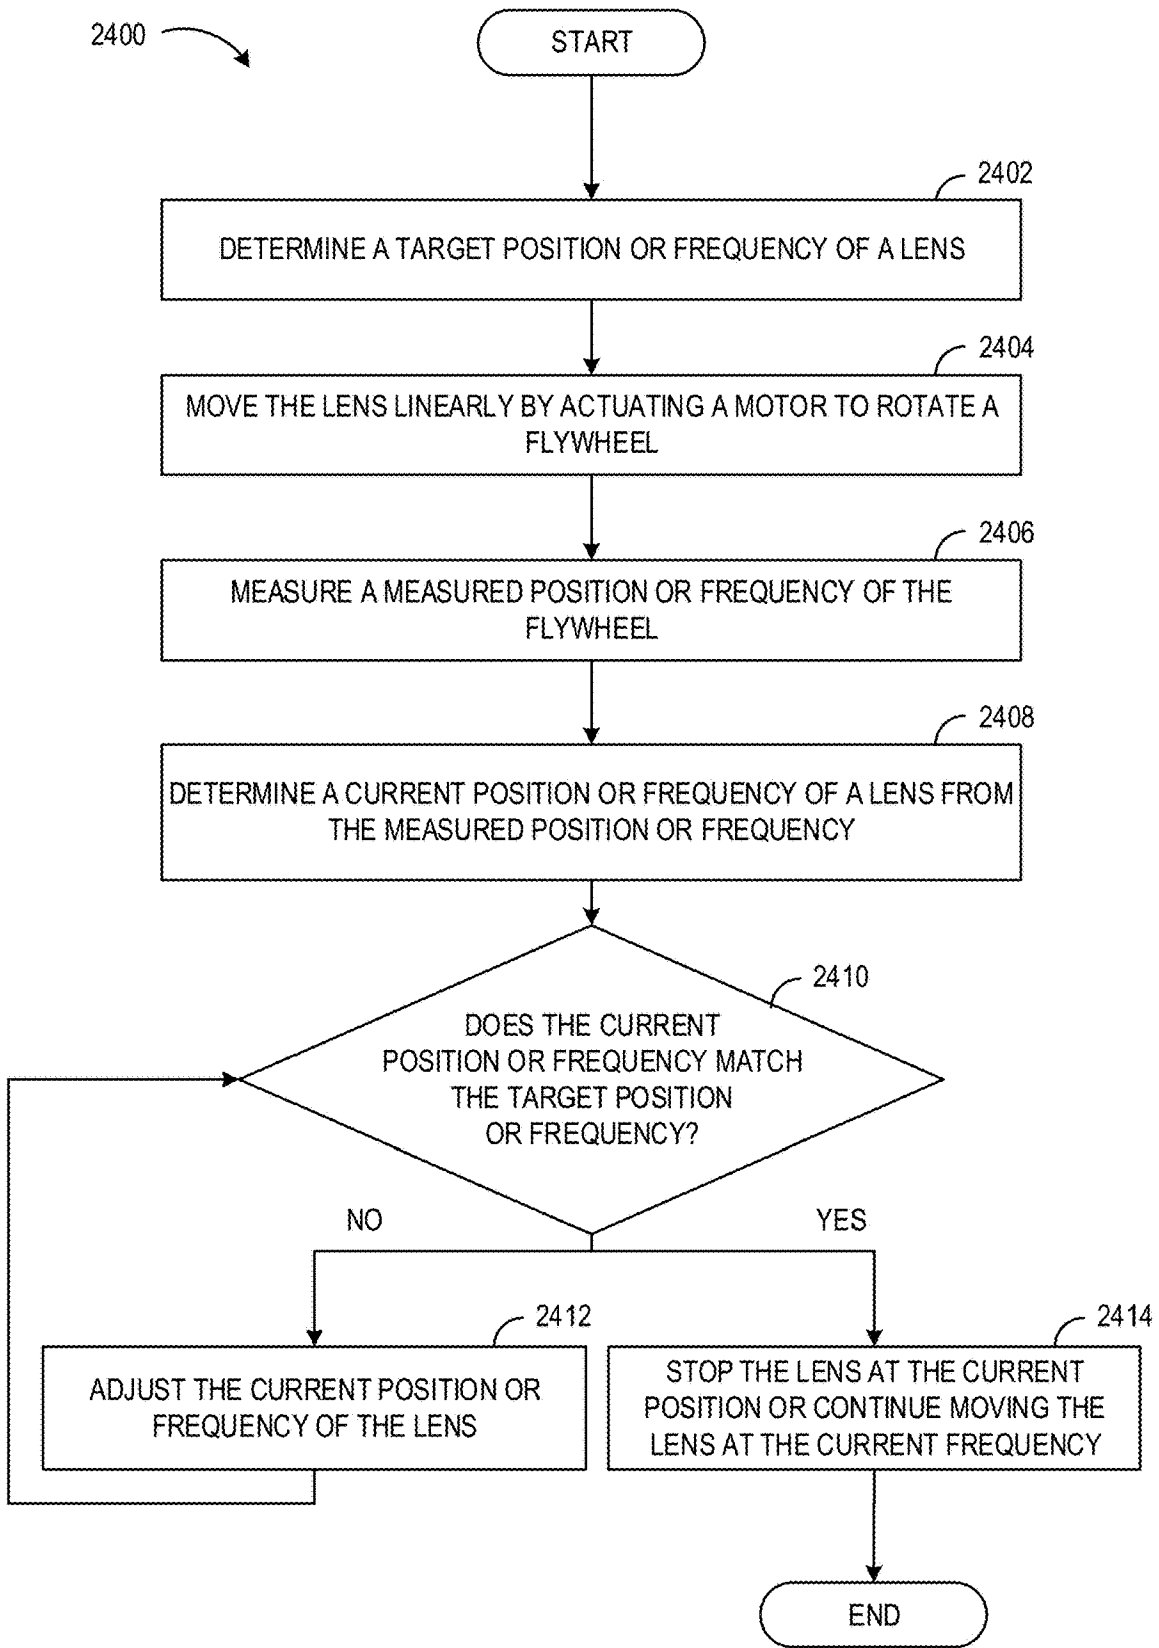


FIG. 24

2500

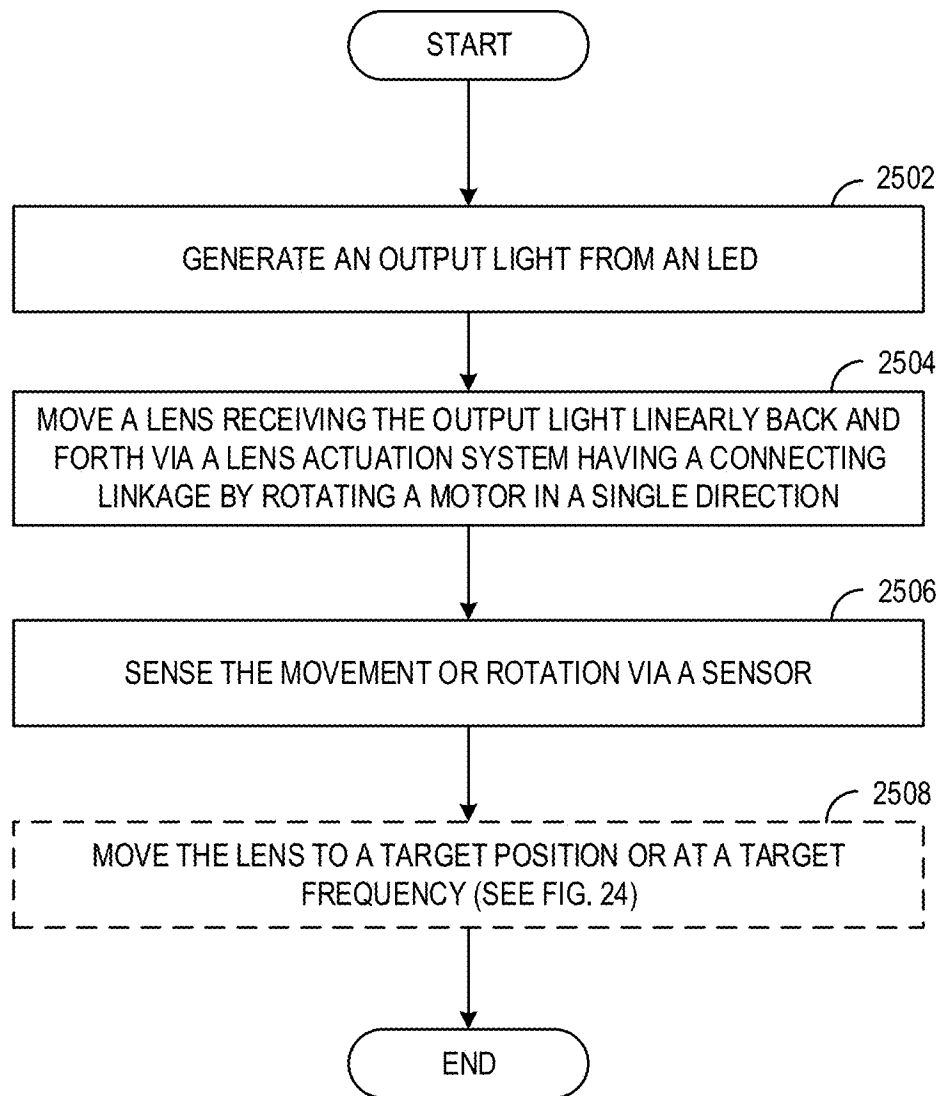


FIG. 25

**SYSTEM FOR AN OPTICAL DEVICE
INCLUDING LIGHT MIXING ROD AND
RESILIENT MEMBER**

CROSS REFERENCE TO RELATED
APPLICATIONS

The present application claims priority to U.S. Provisional Application No. 63/603,023 entitled SYSTEMS FOR AN OPTICAL DEVICE filed Nov. 27, 2023, U.S. Provisional Application No. 63/603,021 entitled SYSTEMS FOR A COUPLING SYSTEM filed Nov. 27, 2023, and U.S. Provisional Application No. 63/603,019 entitled SYSTEMS FOR AN OPTICAL DEVICE filed Nov. 27, 2023. The entire content of the above applications is hereby incorporated by reference for all purposes.

FIELD

The disclosure relates to optical devices, more specifically to a light fixture.

BACKGROUND

Optical devices, such as light fixtures, may be used in a variety of settings. Optical devices may include a light emitting diode (LED) comprising one or more colors. The LED may emit to a light mixing rod (e.g., a light guide) to provide a single light color or a spectrum of colors.

Conventionally, the LED is spaced away from the light mixing rod with an air gap therebetween to protect a glass cover of the LED. For example, due to vibration during movement of the optical device, the glass of a conventional LED may shatter or otherwise degrade upon contact with the light mixing rod. Thus, the space between the LED and the light mixing rod may be demanded in such conventional optical devices to reduce degradation to parts of the optical device. Due to tolerances (e.g., thickness of the LED, fasteners, etc.), the space may have an inconsistent thickness between optical devices, leading to variation in optical effects produced by the optical devices. Additionally, spacing the light mixing rod from the LED may reduce a fraction of light emitted from the LED that reaches the light mixing rod because some light from the LED may be leaked elsewhere via the air gap interposed between the LED and the light mixing rod.

SUMMARY

The disclosure provides support for an optical device that at least partially addresses the issues described above. The optical device includes a light mixing rod pressed against a surface of a light emitting diode (LED). A resilient member, such as one or more springs, may maintain the face-sharing contact between the LED and the light mixing rod throughout actuation of the optical device. In this way, an air gap present in at least some previous examples between an LED and a light mixing rod may be eliminated. Light emitted from the LED may travel through a transparent cover (e.g., glass cover) of the LED to reach the light mixing rod, and may not travel through air. Thus, variations in a distance between the LED and the light mixing rod may be reduced due to being attributed to a single manufacturing tolerance of the thickness of the LED, rather than several according to the thickness of both the LED and the air gap. Therefore, optical effects produced by separate optical devices in accordance with the present disclosure may be more similar.

Additionally, the resilient member securely maintaining the contact between the LED and the light mixing rod throughout actuation of the optical device, such as rotation thereof, may protect the LED from degradation.

It should be understood that the summary above is provided to introduce, in simplified form, a selection of concepts that are further described in the detailed description. It is not meant to identify key or essential features of the claimed subject matter, the scope of which is defined uniquely by the claims that follow the detailed description. Furthermore, the claimed subject matter is not limited to implementations that solve any disadvantages noted above or in any part of this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

The disclosure may be better understood from reading the following description of non-limiting embodiments, with reference to the attached drawings, wherein below:

FIG. 1 illustrates a cross-sectional view of an optical device;

FIG. 2A illustrates examples of a LED, a light mixing rod, and a lens of the optical device;

FIG. 2B illustrates the LED;

FIGS. 3A-3C illustrate a light engine of the optical device, the light engine comprising the LED, the light mixing rod, and a plurality of heat exchangers;

FIGS. 4A-4D illustrate a lens actuation system of the optical device;

FIG. 5 illustrates a perspective view of the portion of the housing of the optical device coupled to the lens;

FIG. 6 illustrates a cross-sectional view of the optical device;

FIG. 7 illustrates the lens in a first position;

FIGS. 8A and 8B illustrate the lens in a second position;

FIG. 9 illustrates a first view of a frame;

FIG. 10 illustrates a second view of the frame;

FIG. 11 illustrates a third view of the frame;

FIG. 12 illustrates a first view of a coupling device;

FIG. 13 illustrates a cross-sectional view of the coupling device;

FIGS. 14A and 14B illustrate a first position and a second position, respectively, of the coupling device;

FIG. 15 illustrates the coupling device positioned to engage with a mount of the frame;

FIG. 16 illustrates the coupling device engaged with the mount of the frame;

FIG. 17 illustrates further coupling devices positioned to engage with further mounts of the frame;

FIG. 18 illustrates a plurality of coupling devices engaged with a plurality of mounts of the frame;

FIG. 19 illustrates a detailed view of the coupling device engaged with the mount of the frame;

FIG. 20 illustrates a plurality of fixtures, such as the optical device, interconnected via a plurality of frames;

FIGS. 21A and 21B illustrate a detailed view of the mount;

FIG. 22 illustrates a detailed view of the coupling device positioned to engage with the mount; and

FIG. 23 illustrates a coupling system comprising a plurality of frames and a plurality of coupling devices.

FIGS. 24 and 25 show flowcharts of methods for implementing the lens actuation system.

FIGS. 1-23 are shown approximately to scale.

DETAILED DESCRIPTION

The present disclosure provides support for an optical device. In one example, the optical device is a lighting

fixture. FIGS. 1 and 6 illustrate cross-sectional views of an optical device including a lens and a light engine partially enclosed in a housing, the light engine comprising a light emitting diode (LED) element, a light mixing rod, and a plurality of heat exchangers. In at least some examples, the LED element is in face-sharing contact with the light mixing rod. FIGS. 2A and 2B illustrate examples of the LED element, the light mixing rod, and the lens of the optical device. FIGS. 3A-3B illustrate views of the light engine. The optical device may include a lens actuation system adapted to move the lens in a linear path between an upstream position where the lens is closest to the LED element and a downstream position where the lens is furthest from the LED element. The lens actuation system and a portion of the housing where the lens actuation system may be coupled thereto is shown in various views in FIGS. 4A-5. The lens actuation system is further shown in a first position in FIG. 7 and a second position in FIGS. 8A and 8B, where the first position is more upstream than the second position. A flowchart of a method for operating the lens actuation system is shown in FIG. 25. A flowchart of a method for operating the lens actuation system to move the lens to a target position or at a target frequency is shown in FIG. 24.

A coupling system may be configured to interlock a plurality of fixtures (e.g., light fixtures such as the optical device of FIGS. 1-8B) with one another to generate a grid or lattice structure. The coupling system may be configured to provide load support and mitigate fixture sag. The coupling system may include at least one frame and at least one coupling device. There may be a frame surrounding each of the fixtures. The coupling devices may physically couple vertically and/or horizontally adjacent frames to interlock the fixtures. An exemplary frame is illustrated in FIGS. 9-11. An exemplary coupling device is illustrated in a perspective view and a cross-sectional view in FIGS. 12 and 13, respectively. The coupling device may be in a first position shown in FIG. 14A or a second position shown in FIG. 14B. The first position may be an unlocked (e.g., disengaged) position and the second position may be a locked (e.g., engaged) position, for example. Specifically, the coupling devices may engage with mounts of the frame, such as the mount shown in a detailed view in FIGS. 21A and 21B. FIGS. 15 and 22 illustrate the coupling device positioned to engage with a mount of the frame. FIG. 16 illustrates the coupling device engaged with the mount of the frame. There may be more than one coupling device engaged with each frame. As such, FIG. 17 illustrates further coupling devices positioned to engage with further mounts of the frame. FIG. 18 illustrates the coupling devices engaged with the mounts of the frame. FIG. 19 illustrates a detailed view of the coupling device engaged with the mount of the frame. FIG. 20 illustrates a first example of a coupling system comprising a plurality of fixtures, such as the optical device of FIGS. 1-8B, interconnected via a plurality of frames and a plurality of coupling devices. FIG. 23 illustrates a second example of a coupling system in accordance with the present disclosure hanging vertically from a support.

It is to be understood that the specific assemblies and systems illustrated in the attached drawings, and described in the following specification, are exemplary embodiments of the inventive concepts defined herein. For purposes of discussion, the drawings are described collectively. Thus, like elements may be commonly referred to herein with like reference numerals and may not be re-introduced.

Turning now to FIG. 1, it shows an optical device 100 comprising a housing 102. A set of reference axes 101, including an x-axis, a y-axis, and a z-axis, is shown in FIG.

1, as well as FIGS. 2-8B for comparison of orientations of the views illustrated therein. The x-axis may be parallel with a direction of movement of a lens 150 of the optical device 100. Additionally or alternatively, the z-axis and the y-axis may be parallel with a plane in which the lens 150 lies. Additionally or alternatively, the x-axis may be parallel with a general direction of light travel through the optical device 100. Additionally or alternatively, the z-axis may be parallel with a direction of gravity, in at least some positions of the optical device 100 during operation (e.g., movement, rotation, etc.) thereof.

As used herein, "upstream" may refer to a component or system, a position of a component or system, or a direction (e.g., of movement) oriented in a relatively negative x-direction. Additionally, as used herein, "downstream" may refer to a component or system, a position of a component or system, or a direction (e.g., of movement) oriented in a relatively positive x-direction. As an example, light may travel through the optical device 100 in a downstream direction. An upstream position of the optical device 100 may describe positions of all of the movable components of the optical device 100 where the lens 150 is furthest upstream. Likewise, a downstream position of the optical device 100 may describe positions of all of the movable components of the optical device 100 where the lens 150 is furthest downstream. The optical device 100 may transition between the upstream position and the downstream position via a lens actuation system. The lens actuation system may operate continuously during repetitive switching between the upstream position and the downstream position, rather than including discrete stops at each of the upstream and downstream positions, as described further below.

In one example, the optical device 100 is a light fixture. The housing 102 may include a front section 104 and a rear section 106. While described as separate sections, it will be appreciated that the housing 102 may be manufactured as a single integral piece or as multiple pieces without departing from the scope of the disclosure.

The rear section 106 may surround one or more of a light emitting diode (LED) 112, a light mixing rod 114, a light rod housing 116, a light rod cap 122, a resilient member 124, a fluid manifold 130, and a plurality of heat exchangers 132. The rear section 106 may include a plurality of louvers 134.

The LED element 112 may be in face-sharing contact with the light mixing rod 114. In one example, the optical device 100 may be configured to rotate in a plurality of directions. The light mixing rod 114 may remain in face-sharing contact with the LED element 112 through a range of motion of the optical device 100.

In previous examples, a gap is present between the LED and the light mixing rod. In the example of FIG. 1, a thickness of the LED element 112 (e.g., dimension parallel with the x-axis) is increased relative to previous examples of optical devices. Specifically, a glass thickness of a glass cover of the LED element 112 may be increased. With this increased thickness, the LED element 112, relative to previous examples, may be configured to withstand pressures applied by the light mixing rod 114 onto the LED element 112 during actuation of the optical device 100. In one example, the thickness of the surface of the LED is greater than 0.5 mm. Additionally or alternatively, the thickness of the surface of the LED is between 0.55 to 1.0 mm. As another example, the thickness of the surface of the LED is between 0.55 to 0.8 mm. In one example, the light mixing rod 114 and the LED element 112 are a single integral piece. As another example, the light mixing rod 114 and the LED element 112 may be separate pieces. The increased thickness

of the glass cover of the LED element **112** may be resistant to degradation while being pressed against the light mixing rod **114** through the range of motion of the optical device **100**.

In FIG. 2A, the LED element **112**, the light mixing rod **114**, and the lens **150** are shown. The lens **150** is a Fresnel lens in at least some examples. Additionally or alternatively, the lens may be constructed of a lightweight material, such as plastic. Additionally or alternatively, the lens **150** may be a front lens. Additionally or alternatively, the lens **150** may be the only lens **150** included in the optical device **100**.

The LED element **112** is shown in FIG. 2A in face-sharing contact with the light mixing rod **114**, with the light mixing rod **114** spaced away from the lens **150**. The LED element **112** is additionally shown in FIG. 2B enlarged for greater detail. The LED element **112** may include LED(s) **208** which may be a single LED or a group of LEDs. In examples where the LED(s) **208** include a group of LEDs, the LEDs may be arranged in a cluster, for example as shown in FIG. 2B. The LED element **112** may emit red, green, white, and blue light, in one example. The LED element **112** may emit additional or alternative colors in other examples. For example, the LED element **112** may be square with a side length **202** of approximately 10-20 mm. However, other dimensions and shapes are possible without departing from the scope of the present disclosure. As described above, a transparent cover **204** of the LED element **112** may have an increased thickness (e.g., dimension parallel with the x-axis) compared to conventional LEDs. The transparent cover **204** may be constructed of glass or another transparent material. For example, the thickness of the transparent cover **204** may be greater than 0.6 mm. Additionally or alternatively, the transparent cover **204** may be between 0.7 and 0.9 mm in thickness. Additionally or alternatively, the thickness of the transparent cover **204** may be one tenth or less of the side length **202**. The transparent cover **204** may be adapted to protect the LED(s) **208** of the LED element **112**.

Further, an air gap present between the LED and the light mixing rod in at least some previous examples of optical devices may be eliminated by positioning the transparent cover **204** and the light mixing rod **114** in face-sharing contact in the optical device **100** of the present disclosure. In this way, a distance light travels from the LED(s) before reaching the light mixing rod **114** (e.g., through the transparent cover **204**) may be reduced, compared to examples where the light travels through both glass (or other transparent material) and air before reaching the light mixing rod. Further, due to differences in light refraction in air and the transparent material such as glass, removing the air gap may allow for more focused light beams, and therefore a greater amount of light being transmitted through the light mixing rod. Further still, fewer tolerances may contribute to variations between optical devices in the distance between the LED element **112** and the light mixing rod **114**. For example, rather than a tolerance in thickness of both the LED and the air gap, only a thickness of the LED may be considered. In this way, manufacturing variations between optical devices may be reduced, allowing for more similar optical effects produced by different optical devices and thus a higher quality of performance.

Returning to FIG. 1, the light rod housing **116** may house the light mixing rod **114**. The light mixing rod **114** may be a rod-shaped and configured to homogenize light emitted by the LED element **112**. The light mixing rod **114** may include an integral diffuser at the end adjacent to the light rod cap **122**. The light rod housing **116** may include one or more guiding features configured to center the light mixing rod

114 relative to the LED element **112**, such as the guiding features **316** of FIG. 3C described below.

Additionally, a fixation system may be implemented to ensure contact between the light mixing rod **114** and the LED element **112** is maintained throughout actuation of the optical device **100**. For example, the light mixing rod **114** may be retained against the LED element **112** via the resilient member **124**. In one example, the resilient member **124** includes one or more springs. The resilient member **124** may be physically coupled to a light rod cap **122** and a surface whereon the LED element **112** is mounted. Thus, the light rod cap **122** may be pulled against the light rod housing **116**, and the light rod housing **116** may be pulled against the LED element **112**. That is, the light rod housing **116** may be compressed between the LED element **112** and the light rod cap **122**. The increased thickness of the transparent cover of the LED element **112** (e.g., transparent cover **204** of FIG. 2B) may strengthen the transparent cover so as to reduce a likelihood of (e.g., prevent) degradation thereof under compressive forces applied by the resilient member **124**. Thus, additionally or alternatively to other examples of transparent cover thickness provided herein, the thickness may be selected according to the strength of the resilient member **124**. The resilient member **124** is described further below with regard to FIGS. 3A-3C.

The fluid manifold **130** may be arranged between the LED element **112** and a surface of the housing **102**. For example, the fluid manifold **130** may be in face-sharing contact with the surface of the housing **102**. The fluid manifold **130** may be included in a thermal management system further including a plurality of heat exchangers **132** fluidly coupled to the fluid manifold, the plurality of louvers **134**, and a fan **136**, where the thermal management system is configured to cool one or more components in the rear section **106**. The plurality of heat exchangers **132** may be configured to radially surround the light rod housing **116**, making the optical device **100** more compact than other examples wherein heat exchangers are positioned elsewhere (e.g., between the LED and the surface of the housing **102** where the fluid manifold **130** is positioned) and do not surround any components on more than one side. The thermal management system is further described with regard to FIGS. 3A-3C.

The optical device **100** may include a control system **180** comprising a controller **170**, one or more actuators including the motor **140**, and one or more sensors, such as a magnetic sensor positioned on the PCB **152**. The controller **170** may be communicatively coupled to the actuators and the sensors, such as via wires or wireless connection. The controller **170** may include non-volatile memory with instructions stored therein executable to perform methods of the present disclosure, such as the method **2500** of FIG. 25 for moving the lens **150** to a target position or at a target frequency. The control system **180** may include devices for entering user input, including buttons, for example to input the target position or the target frequency. In examples where multiple optical devices **100** are used in conjunction, the control system **180** may concurrently control the optical devices **100**. Thus, the one or more actuators and the one or more sensors may belong to separate optical devices **100** and the controller **170** may be communicatively coupled to more than one optical device **100**.

A light engine **300** including the LED element **112**, the light mixing rod **114**, and the plurality of heat exchangers **132** are illustrated in greater detail in a first view **310**, a second view **320**, and a third view **330** in FIGS. 3A, 3B, and 3C, respectively. The second view **320** is a cross section

taken along cutting plane A-A' of FIG. 3A. The third view 330 is a cross section of the first view 310 taken along cutting plane B-B'.

The plurality of heat exchangers 132 may surround the light mixing rod 114, as noted above. For example, the plurality of heat exchangers 132 may radially surround the light rod housing 116, around at least a portion, such as half or more, of the perimeter thereof. The plurality of heat exchangers 132 may include a substantially planar shape normal to a central axis 306 of the light mixing rod 114. The light rod housing 116 may be spaced away from the plurality of heat exchangers 132. For example, the plurality of heat exchangers 132 may include cut outs that form a U-shaped opening 318 where the light rod housing 116 containing the light mixing rod 114 is positioned without physical contact therebetween. In this way, the plurality of heat exchangers 132 may surround a bottom 342 (e.g., area facing the negative z-direction) and both sides 344 (e.g., areas facing y-directions) of the light rod housing 116, increasing heat removal compared to placing the plurality of heat exchangers 132 adjacent to the light rod housing 116 without wrapping therearound (e.g., without the U-shaped opening 318 configured to receive the light rod housing 116).

In alternate examples, the plurality of heat exchangers 132 may surround the sides 344 and a top 346 (e.g., area facing the positive z-direction) of the light rod housing 116. In yet other examples, the plurality of heat exchangers 132 may surround the top 346, bottom 342, and one or both sides 344 of the light rod housing 116. For example, the plurality of heat exchangers 132 may comprise through-holes aligned such that the light rod housing extends therethrough and is circumferentially surrounded by the plurality of heat exchangers 132. In any of the examples of arrangements of the plurality of heat exchangers 132, two or more of the top 346, the bottom 342, and the two sides 344 of the light rod housing 116 may be surrounded by the plurality of heat exchangers 132. For example, three or more of the top 346, the bottom 342, and the two sides 344 may be positioned adjacent to (and spaced away from) portions of the plurality of heat exchangers 132. In this way, thermal management capability may be enhanced and packing volume may be decreased, compared to systems where the thermal management system does not radially surround the light engine 300.

The plurality of heat exchangers 132 may include one or more light leak features 302 configured to block light emission from certain areas, such as areas adjacent to an upstream heat exchanger 314 and a downstream heat exchanger 312. The light leak features 302 may protrude laterally from the upstream heat exchanger 314 and the downstream heat exchanger 312 and angle towards the central axis 306.

The plurality of heat exchangers 132 may be mounted to the housing 102 of FIG. 1 via one or more of fasteners, welds, fusions, adhesives or a combination thereof. Additionally or alternatively, the plurality of heat exchangers 132 may be held via one or more tubes 304. The tubes 304 may be configured to conduct fluid from the fluid manifold 130 to each of the plurality of heat exchangers 132. The fluid manifold 130 and the plurality of heat exchangers 132 may be fluidly coupled via the tubes 304. The tubes 304 may extend through the plurality of heat exchangers 132 parallel with the light mixing rod 114 (e.g., parallel to the central axis 306) and normal to the plurality of heat exchangers 132. The plurality of heat exchangers 132 may include protrusions 322 extending from the downstream heat exchanger 312 that at least partially circumferentially surround the tubes 304 for stabilization thereof. The tubes 304 may end in caps 308

adjacent to the downstream heat exchanger 312. The tubes 304 may be symmetrically arranged with respect to the light rod housing 116. Although there are four tubes 304 shown in FIGS. 3A-3C, there may be more or fewer tubes 304 for conducting fluid through the heat exchangers 132 in other examples. Accordingly, there may be more or fewer protrusions 322 in other examples.

The light rod housing 116 comprises guiding features 316 configured to center the light mixing rod 114 relative to the light rod housing 116, and consequently relative to the LED element 112. For example, the guiding features 316 may protrude from inner walls of the light rod housing 116 inwards towards the light mixing rod 114. The guiding features 316 may be symmetrically (e.g., circumferentially equidistantly) arranged. There may be three or more guiding features 316. For example, there may be four guiding features 316, as shown in FIG. 3C. By centering the light mixing rod 114 with the LED element 112 using the guiding features 316, quality of optical effects produced by the light traveling from the LED element 112 through the light mixing rod 114 may be increased.

The LED element 112 may be mounted on a surface 326, for example via thermally conductive adhesive. The surface 326 may be of a heatsink. In this way, the LED element 112 may be cooled via heat transfer through the thermally conductive adhesive to the surface 326 of the heatsink. The LED element 112 may be fixed relative to the tubes 304 and the fluid manifold 130, which may be fixed relative to the housing 102 of the optical device 100 shown in FIGS. 1 and 6.

Additionally, the LED element 112 may be in face-sharing contact with the light mixing rod 114, as described above. Specifically, the transparent cover of the LED element 112 (e.g., transparent cover 204 of FIG. 2B) may be in face-sharing contact with the light mixing rod 114. The resilient member 124 may ensure contact is maintained between the LED element 112 and the light mixing rod 114 throughout actuation of the optical device 100. For example, actuation of the optical device 100 may include rotation, which may impose separating centrifugal forces upon components of the optical device 100 such as the LED element 112 and the light mixing rod 114.

As noted above, the light mixing rod 114 may be retained (e.g., spring-loaded) against the LED element 112 throughout such actuation of the optical device 100 via the resilient member 124. The resilient member 124 may comprise one or more springs (e.g., one or more compression springs). For example, the resilient member 124 may include two springs (e.g., two compression springs) arranged parallel with the central axis 306. The two springs may be positioned with one at each of the top 346 and the bottom 342 of the light rod housing 116. Alternatively, the resilient member 124 may include two springs arranged parallel with the central axis 306, one on each of the two sides 344 of the light rod housing 116. The resilient member 124 may include two or more springs arranged symmetrically about the light rod housing 116. As an example, the resilient member 124 may include four compression springs arranged with one on each of the top 346, bottom 342, and sides 344. Additionally or alternatively, the resilient member 124 may include one or more elastic bands (e.g., rubber band) with sufficient resistance to stretching. Additionally or alternatively, the resilient member 124 may include any other resilient (e.g., elastic) component capable of providing tension greater than separating forces imposed on the LED element 112 and the light mixing rod 114, for example due to rotation thereof according to rotation of the housing 102.

The resilient member **124** (e.g., one or more springs, elastic bands, a combination thereof, etc.) may physically and elastically couple the light rod cap **122** at a first end of the light mixing rod **114** with securing members **324** at a second end of the light mixing rod **114**, where the second end is opposite of the first end. The securing members **324** may be secured (e.g., via fasteners **328**, welding, soldering, adhesive, and/or the like) to the surface **326** on which the LED element **112** is positioned. In this way, the resilient member **124** may be physically coupled to the light rod cap **122** and securing members **324** which are fixed to the surface **326**. The securing members **324** may be integral with the surface **326** such that the resilient member **124** is directly physically coupled to the surface **326**, rather than indirectly such as via the securing member **324**.

The resilient member **124** may extend between the surface **326** and the light rod cap **122** parallel with the light rod housing **116**. For example, the resilient member **124** may extend parallel with the central axis **306** whereon the light mixing rod **114** and the light rod housing **116** are centered. Additionally, the resilient member **124** may be in contact with the light rod housing **116**. For example, the light rod housing **116** may include centering protrusions **352** which flank springs of the resilient member **124**. Additionally or alternatively, the light rod housing **116** may include recesses **354** adapted to center the resilient member **124** relative thereto. For example, the recesses **354** may be contoured according to the shape of the resilient member **124**. In one example, the recesses **354** may be semicircular to partially circumferentially surround compression springs. The recesses **354** and/or the centering protrusions **352** may extend axially along the length of the light rod housing **116** on the top **346**, bottom **342**, and/or sides **344** according to configuration of the resilient member **124**. The recesses **354** and/or the centering protrusions **352** may be in contact with and support the resilient member **124**.

The light rod housing **116** may include tabs **332** which bend radially outwards towards the securing members **324**. In this way, the light rod housing **116** may remain spaced away from the LED element **112** to protect the translucent cover of the LED element **112** from mechanical degradation. Additionally, if the light rod housing **116** shifts towards the light rod cap **122**, the light rod housing **116** may be stopped before contacting the LED element **112** by the tabs **332** pressing against the securing members **324**, in addition to the light rod housing **116** hitting the light rod cap **122**. Alternatively, the light rod housing **116** may be integral with the securing members **324**. In this way, the light rod housing **116** may be directly fixed to the surface **326** (e.g., via the fasteners **328**, welding, soldering, adhesive, and/or the like) such that the light rod housing **116** is spaced away from and centered around the LED element **112**. Thus, the resilient member **124** may be physically coupled at a first end to the light rod cap **122** and at a second end to the surface **326** whereon the LED element **112** is mounted, either directly or indirectly (e.g., via the securing members **324**).

The light rod cap **122** may be in face-sharing contact with the light mixing rod **114**. The light mixing rod **114** may include a widening **334** with greater diameter than the rest of the light mixing rod **114** at the end adjacent to the light rod cap **122**. The widening **334** may be interposed between the light rod cap **122** and the light rod housing **116**. The light rod housing **116** may include a circumferential notch to accommodate the widening **334**. Thus, the light mixing rod **114** may be interposed and compressed between the light rod cap **122** and the LED element **112** via the resilient member **124**. By elastically coupling the light rod cap **122** with the

surface **326** (e.g., via the resilient member **124** and the securing members **324**), the light rod cap **122** may be pulled towards the LED element **112**, pressing against the light mixing rod **114** and/or the light rod housing **116** such that the light mixing rod **114** is spring-loaded and able to withstand forces experienced during movement (e.g., rotation) of the light engine **300** without separating the LED element **112** and the light mixing rod **114**.

For example, returning to FIG. 1, the resilient member **124** may provide a force that maintains contact between the LED element **112** and the light mixing rod **114** throughout movement of the optical device **100**. For example, the optical device **100** may rotate, swivel, pivot, or execute another movement, wherein the resilient member **124** is configured to maintain the face-sharing contact between the LED element **112** and the light mixing rod **114** through these movements. Thus, a resistance of the resilient member **124** to stretching (e.g., spring constant in examples where the resilient member **124** includes a spring) may be selected according to a maximum force experienced during movement of the optical device **100**. For example, the resistance to stretching of the resilient member may be greater than maximum separating forces experienced during movement (e.g., rotation, swiveling, pivoting, etc.) of the optical device **100**.

In this way, omitting an air gap between the LED element **112** and the light mixing rod **114** may reduce tolerance considerations (e.g., tolerances of fasteners and components to ensure adequate air gap thickness), and therefore diminish variation in a distance between the LED element **112** and the light mixing rod **114**. For example, the only variation between optical devices **100** in the distance between the LED element **112** and the light mixing rod **114** may be attributed to variation in transparent cover thickness of the LED element **112** (e.g., within manufacturing tolerance of the LED thickness). Due to the resilient member **124**, small variations (e.g., within manufacturing tolerance) in thickness of the LED element **112** may not affect the security of the coupling between the LED element **112** and the light mixing rod **114**. Further, by providing tension exceeding forces imposed on the light engine **300** during actuation of the optical device **100** in the coupling between the LED element **112** and the light mixing rod **114**, contact between the LED element **112** and the light mixing rod **114** may be maintained more securely compared with operating non-resilient fasteners (e.g., bolts, welding, adhesive, etc.) to couple the light mixing rod **114** in face-sharing contact with the LED element **112**.

The optical device **100** further includes a cone **126** arranged around the light rod cap **122**. The cone **126** may extend from the rear section **106** and into the front section **104** of the housing **102**. A diameter of the cone **126** may increase in the downstream direction (e.g., positive x-direction) such that a maximum diameter of the cone **126** is arranged in the front section **104** and a minimum diameter of the cone **126** is arranged towards the rear section **106**.

The cone **126** may block light from entering the optical device **100** and contacting one or more of a printed circuit board (PCB) **152**, electronics, or other components of the optical device **100** behind the cone **126** (e.g., to the left of the cone **126** with respect to the orientation in FIG. 1). The cone **126** may be further configured to block light (e.g., emitted from the sun or other exterior source) from being focused by the lens **150** onto the components behind the cone **126**, including the light engine **300**. Additionally or alternatively, the cone **126** may be configured as a heatsink and thus may provide an amount of thermal management to

the optical device 100. The cone 126 may be further configured to support a plurality of back light LEDs 127. For example, the cone 126 may include an annular section 154 protruding from the wide end (e.g., downstream end) of the cone 126 and facing parallel with the lens 150. The plurality of back light LEDs 127 may be circularly distributed along a circumference of the cone 126. Specifically, the plurality of back light LEDs 127 may be arranged along the annular section 154. Thus, the back light LEDs 127 may be positioned between the light mixing rod 114 and the movable lens 150. The plurality of the back light LEDs 127 may be configured to produce lighting effects.

The front section 104 may further surround a motor 140, a connecting linkage 142, and articulating arms including a first arm 144, and a second arm 146. The second arm 146 may be coupled to a lens frame 148 housing the lens 150. The motor 140, the connecting linkage 142, the first arm 144, the second arm 146, the lens frame 148, and the lens 150 may be included in a lens actuation system 400 shown in FIGS. 4A-4D. The lens actuation system 400 may make a position of the lens 150 within the housing 102 adjustable.

The connecting linkage 142 may be positioned opposite the motor 140 across the cone 126. For example, the connecting linkage 142 may be positioned above the cone 126 and the motor 140 may be positioned below the cone 126. The connecting linkage 142 may be configured to actuate in a circular motion in a space between the cone 126 and the rear section 106 of the housing 102. In one example, the connecting linkage 142 may include a curved shape contoured to match the cone 126. For example, the connecting linkage 142 may curve around and be spaced away from the cone 126. Thus, the connecting linkage 142 may move within the space between the PCB 152 and the cone 126 (e.g., from the upstream position to the downstream position), or any position therebetween, without contacting the cone 126.

The articulating arms may translate movement of the connecting linkage 142 to movement of the lens frame 148. For example, the lens frame 148 and the lens 150 may move linearly between the upstream position and the downstream position according to a position of the connecting linkage 142. The connecting linkage 142, and thus the lens frame 148 and the lens 150, may be driven by the motor 140, as described further below.

Moving the lens 150 linearly with respect to the housing 102 and the light engine 300 may adjust an optical effect produced by the optical device 100. For example, a distance between the LED element 112 and the lens 150 may correlate to a beam width of a light beam exiting the optical device 100 via the lens 150. Rapid transition between a narrow beam and a wide beam may be demanded. The lens actuation system 400 may move the lens 150 more rapidly and efficiently than previous systems, as described further below.

Turning to FIGS. 4A, 4B, 4C, and 4D, the lens actuation system 400 is shown in a perspective view 410, a side-on view 420, a side-on cross sectional view 430, and a top-down cross sectional view 440, respectively. Some parts are shown translucently in the perspective view 410 and the side-on view 420 so as to not obstruct visuals of parts therebehind. The side-on cross sectional view 430 may be a section taken along a cutting plane C-C' parallel with an x-z plane in the perspective view 410. The top-down cross sectional view 440 may be a section taken along a cutting plane D-D' parallel with an x-y plane in the perspective view 410. The cone 126 and a portion of the housing 102 are also

shown in FIGS. 4A-4D. The position of the lens 150 (e.g., relative to the cone 126) may be adjustable via the lens actuation system 400.

The motor 140 may be coupled to a flywheel 406 via a shaft 408. The shaft 408 may extend from side to side of the cone 126 such that the flywheel 406 and the motor 140 are opposite each other across the cone 126. In this way, packing volume of the optical device 100 may be reduced compared to positioning the motor 140 and the flywheel 406 on the same side of the cone 126. The motor 140 may rotate the flywheel 406 via the shaft 408, which in turn may actuate the connecting linkage 142 via a rod (e.g., rod 702 of FIGS. 7-8B). The connecting linkage 142 may be coupled to the housing at connecting linkage joints 416 (e.g., pivot joints) such that the connecting linkage 142 can rotate but not translate with respect to the housing 102.

Actuating the connecting linkage 142 may include rotating the connecting linkage 142 about a first rotational axis 414 that extends through the connecting linkage joints 416. As described above, the connecting linkage 142 may be curved according to the curvature of the cone 126 such that the connecting linkage 142 remains spaced away from the cone 126 throughout actuation of the connecting linkage 142. In this way, the packing volume of the optical device 100 may be reduced (e.g., compared to spacing a straight connecting linkage away from the cone 126) while preventing interference of the cone 126 with function of the lens actuation system 400, including rotation of the connecting linkage 142.

The first arm 144 may be an arm of a first arm pair 444. The first arm pair 444 is directly coupled to the connecting linkage 142 and a second arm pair 446 comprising the second arm 146. The first arm pair 444 may extend between the connecting linkage 142 and the second arm pair 446. Specifically, first ends of the first arm pair 444 may be coupled to the connecting linkage 142 at the connecting linkage joints 416 such that the connecting linkage 142 connects the first arm pair 444 of arms diametrically opposite one another across the cone 126. Second ends of the first arm pair 444 may be coupled to first ends of the second arm pair 446 at arm joints 418 (e.g., pivot joints), where the second ends of the first arm pair 444 are opposite lengthwise from the first ends of the first arm pair 444. Pivot joints, such as the connecting linkage joints 416 and the arm joints 418, may allow for rotational independence of the components coupled at the joint. In this way, there may be a variable angle (e.g., second arm angle 724 of FIGS. 7-8B) between the first arm pair 444 and the second arm pair 446, where the variable angle may change according to rotation of the flywheel 406. The first arm pair 444 may be rotationally coupled to the connecting linkage 142 such that upon rotation of the connecting linkage, the first arm pair 444 may also rotate about the first rotational axis 414 with the same rotational speed. In some examples, the first arm pair 444 may be integral with the connecting linkage 142.

The second arm pair 446 is directly coupled to the lens frame 148 at frame joints 422. Specifically, second ends of the second arm pair 446 are coupled to the lens frame 148 at the frame joints 422, where the second ends are opposite lengthwise from the first ends of the second arm pair 446 which are coupled to the first arm pair 444. The second arm pair 446 may extend between the first arm pair 444 and the lens frame 148.

Motion from the connecting linkage 142 may be symmetrically applied to each of the first arm pair 444, the second arm pair 446, and the lens frame 148. In this way, the connecting linkage 142 may distribute torque approximately

equally between the arms of the first arm pair **444**, thereby applying approximately equal force to both sides of the lens frame **148**. Rotational motion of the flywheel **406** may be translated via the connecting linkage **142** and the articulating arms (including the first arm pair **444** and the second arm pair **446**) to linear oscillating motion of the lens frame **148**. In this way, each of the flywheel **406**, the connecting linkage **142**, the rod **702**, the plurality of articulating arms, the lens frame **148**, and the lens **150** may be configured to move according to operation of the motor **140**.

To repetitively transition back and forth between the upstream position and the downstream position, pausing output of the motor **140** may not be demanded, eliminating deceleration of the motor **140** and flywheel **406** near the upstream and downstream positions and allowing for more rapid cycles. As used herein, a cycle may include motion of the lens from a starting position, through all other positions between and including the upstream position and the downstream position, back to the starting position. Thus, a cycle may be executed by a single full, continuous rotation (e.g., 360 degrees) of the flywheel **406** in a single rotational direction. Such rotation of the flywheel **406** may perform one or more sequential cycles more quickly than systems where stopping and reversing at each of the upstream and the downstream positions is demanded, such as a belt drive or worm drive system.

The housing **102** may include a plurality of features for coupling to the lens actuation system **400**. The plurality of features may include threaded inserts/molds, tracks, bearings, tabs, receiving holes, and interlocking shapes for retaining the lens **150** and maintaining linearity of the motion thereof.

For example, the housing **102** may include a pair of tracks **402**. The pair of tracks **402** may be diametrically opposite one another. In some examples, the pair of tracks **402** may be positioned at the frame joints **422**. For example, as shown in FIGS. 4A-4D, the frame joints **422** may be diametrically opposite each other along the y-axis, and the tracks **402** may also be diametrically opposite each other along the y-axis. In other examples, the pair of tracks **402** may be offset from the frame joints **422**. For example, the frame joints **422** may be diametrically opposite each other along the y-axis as shown, and the tracks **402** may be diametrically opposite each other along the z-axis. In some examples, there may be additional tracks. The pair of tracks **402** may be located downstream relative to the cone **126** and the connecting linkage joints **416**.

The pair of tracks **402** may each be configured to engage with a retention arm **404** of the lens actuation system **400**. In one example, the retention arms **404** are spring clips configured to retain the lens actuation system **400** within the tracks **402**. In one example, the retention arms **404** may be directly coupled to the lens frame **148**. For example, as best seen in FIG. 4D, the retention arms **404** may fit into a complementary recess formed in the lens frame **148**. In some examples, the second arm **146** may be in face-sharing contact with the retention arm **404**. The retention arms **404** may be flexible and configured to press against a surface of a corresponding track of the pair of tracks **402**. In one example, a number of tracks **402** is equal to a number of retention arms **404**. In such an example, there may be two or more tracks **402** and correspondingly, there may be two or more retention arms **404**.

The tracks **402** may include different cutouts, protrusions, and indentations that are complementary to features of the retention arms **404** such that the retention arms **404** may slide within a corresponding track **402** as the lens **150** is

actuated from the upstream position to the downstream position, or vice-versa, without disengaging from the tracks **402**. As described above, the lens **150** is relatively closer to the cone **126** in the upstream position compared to the downstream position.

The retention arms **404** may each move relative to the housing **102** along a respective first axis **432** and a second axis **434**, where the second axis **434** is normal to the first axis **432**. There may be a first axis **432** for each retention arm **404**, where the first axes are parallel to one another. The first axis **432** may be parallel with motion of the lens frame **148**. The second axis **434** may be perpendicular to motion of the lens frame **148**. Movement of the retention arms **404** along the first axis **432** may include sliding of the retention arms against the tracks **402**. Movement of the retention arms **404** along the second axis **434** may include tension of the retention arms **404** increasing or decreasing.

In one example, the portion of the housing **102** comprising the tracks may be a separate piece from a remainder of the housing **102** shown in FIGS. 1, 2 and 6. In such an example, the portion of the housing **102** comprising the tracks **402** may be physically coupled to the remainder of the housing **102** via fasteners, welds, adhesives, and/or fusions. Additionally or alternatively, the housing **102** may be a single integral piece.

Additionally or alternatively to the tracks **402** and complementary retention arms **404**, the lens actuation system **400** may include other means of guiding the motion of the lens frame **148** and accordingly, motion of the lens **150**, linearly relative to the housing **102**. For example, the lens frame **148** may include features such as indents (e.g., indents **704** of FIGS. 7-8B) that are complementary to features of the housing **102** such as protrusions adapted to be received by the indents.

The lens actuation system **400** may actuate the lens **150** from a first position **700** shown in FIG. 7, to a second position **800** shown respectively in a first view **810** and a second view **820** in FIGS. 8A and 8B, or vice versa. In one example, the first position **700** is a relatively upstream position and the second position **800** is a relatively downstream position. For example, a first distance **708** between the cone **126** and the lens frame **148** in the first position **700** may be shorter than a second distance **802** between the cone and the lens frame **148** in the second position **800**. That is, the distance between the cone **126** and the lens frame **148** may be adjustable according to rotation of the flywheel **406**. Additionally or alternatively, the first position **700** may be a relatively wide beam position and the second position **800** may be a relatively narrow beam position.

A first end of the rod **702** may be coupled to the flywheel **406** at a flywheel joint **714**. The flywheel joint **714** may be off-center with respect to the center of the flywheel **406**. In this way, the first end of the rod **702** may be moved in a circular pathway according to rotation of the flywheel **406**. A second end, opposite the first end, of the rod **702** may be physically coupled to a bracket **706** of the connecting linkage **142**. The bracket **706** may protrude from the connecting linkage **142** in a direction oriented away from the lens **150**. In one example, the bracket **706** is off-center relative to a center of the connecting linkage **142**. The bracket **706** may be spaced away from the connecting linkage joints **416**. The bracket **706** may be vertically above the flywheel **406**. The bracket **706** and the flywheel **406** may be secured to the rod **702** such that they are rotationally independent and thus allowed to pivot relative to one another.

The flywheel 406 may rotate in either rotational direction (e.g., clockwise or counterclockwise with respect to FIG. 7) about a second rotational axis 712 extending centrally through the shaft 408. The flywheel 406 may rotate 360 degrees such that the flywheel 406 rotates continuously (e.g., 360 degrees) about the second rotational axis 712, the bracket 706 may be compelled upwards and downwards via the rod 702, causing the connecting linkage 142 to rotate about the first rotational axis 414.

Specifically, as the bracket 706 is pushed upwards by rotation of the flywheel 406 about the second rotational axis 712, the second arm pair 446 may pull the lens frame 148 closer to the cone 126, which is stationary with respect to the housing 102. The lens frame 148 may slide along the tracks 402 which may be perpendicular to the first rotational axis 414 and/or the second rotational axis 712. For example, a first arm angle 722 between the first arm 144 and the connecting linkage 142 may remain constant due to the first arm pair 444 being rotationally coupled or integral with the connecting linkage 142. A second arm angle 724 between the first arm 144 and the second arm 146 may be reduced as the bracket 706 is pushed upwards and the lens 150 is moved closer to the flywheel 406, the motor 140, and the cone 126. Additionally, a distance 726 between the rod 702 and the arm joints 418 may be reduced as the lens 150 is moved closer to the flywheel 406, the motor 140, and the cone 126.

Conversely, as the bracket 706 is pulled downwards by rotation of the flywheel 406, the second arm pair 446 may push the lens frame 148 further away from the cone 126, linearly along the tracks 402 as described above. For example, the first arm angle 722 may remain constant. The second arm angle 724 and the distance 726 may increase. For example, comparing the first position 700 with the second position 800, the first arm angle 722 may be the same. The second arm angle 724 may be greater in the second position 800 than the first position 700. Thus, the second arm angle 724 may be variable according to rotation of the flywheel 406. The distance 726 may be greater in the second position 800 than the first position 700.

Rotating the flywheel 406 a full rotation may prompt a full cycle of lens 150 movement through every position between and including the upstream position (e.g., closest to the cone 126) and the downstream position (e.g., furthest from the cone 126). The upstream position may include the flywheel 406 being at an angular position where the flywheel joint 714 is closest to the bracket 706 (e.g., at a topmost position) and the downstream position may include the flywheel 406 being at an angular position where the flywheel joint 714 is furthest from the bracket 706 (e.g., at a bottommost position).

Therefore, the angular position of the flywheel 406 may directly correlate to the linear position of the lens 150. A single sensor (e.g., magnetic sensor) may be used to monitor the current state of the lens actuation system 400 by detecting a detectable element 412 positioned along the circumference of the flywheel 406. The detectable element 412 may alternatively be positioned elsewhere along the flywheel 406 that is off-center of the flywheel 406. For example, the detectable element 412 may be a magnet detectable by a magnetic sensor positioned on and electrically coupled to the PCB 152 shown in FIGS. 1, 5, and 6. The magnetic sensor may be stationary with respect to the housing 102. The flywheel 406 may not move besides rotating with respect to the housing 102. Therefore, a distance between the detectable element 412 (e.g., magnet) and the sensor (e.g., magnetic sensor) may be used to find an angular position of

the flywheel 406. The distance between the detectable element 412 and the sensor may be used to measure the position of the flywheel 406, and thus determine the position of the lens 150. Additionally, a rate of change in the distance between the detectable element 412 and the sensor may be used to determine the angular velocity of the flywheel 406, and correspondingly the oscillating frequency of the lens 150.

In this way, each of the shaft 408, the flywheel 406, the connecting linkage 142, the rod 702, the plurality of articulating arms (e.g., first arm pair 444 and second arm pair 446), the lens frame 148, and the lens 150 is configured to move based on operation of the motor 140. For example, because operation of the motor 140 determines the angular position and speed of the flywheel 406 via the shaft 408, operation of the motor 140 may also determine the position and speed of the connecting linkage 142, the rod 702, the plurality of articulating arms, the lens frame 148, and the lens 150.

Operation of the motor 140 may be controlled to rotate the flywheel 406 and consequently move the lens 150 in any patterns. In some examples, the motor 140 rotates the flywheel 406 in one rotational direction. In other examples, the flywheel 406 alternates rotational directions according to a desired optical effect (e.g., beam width patterns). For example, the flywheel 406 may repetitively rotate a partial cycle before switching to the other direction to circumvent one or both of the end positions of the lens 150, decreasing a contrast between wide and narrow beams. In some examples, the motor 140 may pause rotation of the flywheel 406 when beam width variation is no longer desired. In other examples, rotation of the flywheel 406 may be continuous throughout operation of the optical device 100. Continuous rotation of the flywheel 406 via continuous operation of the motor 140 may be more rapid and efficient than other systems where continuous cycling of the lens demands stopping and reversing the motor, such as a belt drive or worm drive system. Additionally or alternatively, the motor 140 may operate at a range of speeds such that the lens 150 oscillates at a range of frequencies (e.g., up to 3 Hz). Additionally or alternatively, the motor 140 may operate at a single speed such that the lens 150 oscillates at a constant frequency throughout actuation of the lens 150.

Relative dimensions of the lens actuation system 400 may be adjusted to adapt the lens actuation system 400 to an application. For example, if a greater span between the upstream and downstream positions of the lens 150 is demanded, the diameter of the flywheel 406 may be increased and the flywheel joint 714 may be moved radially outwards, away from the second rotational axis 712. Conversely, if a smaller difference between the upstream and downstream positions of the lens 150 is demanded, the diameter of the flywheel 406 may be decreased and/or the flywheel joint 714 may be moved radially inwards, closer to the second rotational axis 712. Additionally or alternatively, relative lengths of the articulating arms may be adjusted.

Turning to FIGS. 5 and 6, a first view 500 and a second view 600 of the optical device 100 are respectively shown. The lens 150 and some parts of the housing 102 are omitted in the first view 500 for visibility of components housed therein. The second view 600 is a cross section view.

A portion 502 of the housing 102 may extend beyond the tracks 402. In this way, the tracks 402 may be spaced away from a downstream end 512 of the optical device 100 by a distance 504. The downstream position of the lens 150 may be at least the distance 504 away from the downstream end 512. The portion 502 may be integral with the portion

comprising the tracks 402, in some examples, such as examples where the housing 102 is a single integral piece. Alternatively, the portion 502 may be a separate piece from the portion comprising the tracks 402 and coupled thereto via fasteners, adhesive, soldering, a combination thereof, etc.

The lens actuation system 400 may adjust a distance 602 between the LED element 112 and the lens 150. The distance 602 may be perpendicular with the lens 150. The tracks 402 may be parallel with the distance 602 such that the lens 150 moves linearly therealong when actuated by the lens actuation system 400 to increase or decrease the distance 602. The tracks 402 may be bordered by protrusions 506 on both sides, extending parallel with motion of the lens frame 148 and the lens 150, and with the distance 602. The protrusions 506 may jut radially inwards from the housing 102. The protrusions 506 may engage with the indents 704 in the lens frame 148. For example, the indents 704 may receive the protrusions 506. As the lens 150 is moved via the lens actuation system 400 as described above, the indents 704 may slide along the protrusions 506 to maintain linearity of the motion of the lens 150 in a direction parallel with the distance 602. In some examples, there may be further protrusions and complementary indents arranged circumferentially around the housing 102 and the lens frame 148, respectively. Additionally or alternatively, retention arms such as the retention arms 404 of FIGS. 4A-8B may slide along a surface 508 of the tracks 402 interposed between the protrusions 506. In this way, the tracks 402 may be slidingly engaged with the lens frame 148 and the retention arms which may be physically coupled to the lens frame 148.

An insulating layer 510 may be interposed between the back light LEDs 127 and the cone 126. The insulating layer 510 may protrude radially inwards from the cone 126 to catch stray light and ensure the light is directed towards the lens 150. Extensions of the cone 126 may protrude radially outward towards the housing 102. The extensions may be physically coupled to the housing 102, for example via fasteners 516 extending through the housing 102 and the cone 126 or other fastening means such as soldering.

As described above, a sensor may detect a state of the flywheel 406 of FIGS. 4A-8B. For example, a plurality of electrical components 514 may be electrically coupled to the PCB 152 and may include a flywheel sensor. The PCB 152 may be annular shaped. The PCB may be interposed between the light engine 300 and the cone 126. Additionally or alternatively, the PCB 152 may be interposed between the light engine 300 and the lens actuation system 400. The cone 126 and/or the light rod cap 122 may extend through the center of the PCB 152. For example, the narrowest end of the cone 126 may be circumferentially surrounded by the PCB 152. The sensor of the plurality of electrical components 514 electrically coupled to the PCB 152 may be positioned on an area of the PCB 152 proximate to the flywheel 406. For example, the sensor may be closer to the flywheel 406 than the motor 140 or the connecting linkage 142. Additionally, the PCB 152 may be interposed between the sensor and the light engine 300. Additionally or alternatively, the PCB 152 may be located between the LED element 112 and the lens actuation system 400.

By utilizing continuous rotational motion of the flywheel to drive back and forth linear motion of the lens 150, the sensor may be the only sensor demanded to track the lens 150. Hence, the lens actuation system 400 may be less complex than other systems demanding two or more sensors to track the lens, for example one at each of the end positions (e.g., upstream and downstream positions). Additionally, the

size of the flywheel may correlate directly to the distance between the upstream and downstream positions of the lens 150. In this way, the range of motion of the lens 150 may be intrinsic to the geometry of the lens actuation system design, rather than affected by operation of the motor 140 as in previous systems where the drive stops and reverses at each end position.

Turning to FIG. 25, a flowchart of a method 2500 is shown for operating a lens actuation system having a connecting linkage, such as the lens actuation system 400 which includes the connecting linkage 142 of FIGS. 1 and 4A-8B.

The method 2500 begins at 2502, wherein an output light is generated from an LED, such as the LED element 112 of FIGS. 1-3C and 6. The output light may comprise one or more colors (wavelengths of light). The output light may be homogenized, for example via the light mixing rod 114 of FIGS. 1-3C and 6.

The method 2500 proceeds to 2504, wherein a lens receiving the output light is moved linearly back and forth via the lens actuation system having the connecting linkage by rotating a motor (e.g., motor 140 of FIGS. 1 and 4A-8B) in a single direction. The motor may not pause or reverse rotation (e.g., rotate in the rotational direction opposite to the single direction) in order to reverse the linear lens movement. The linear movement of the lens may be oscillating motion. The lens actuation system may further include a flywheel (e.g., flywheel 406 of FIGS. 4A-4D and 7-8B) driven by the motor and coupled to the connecting linkage via a rod (e.g., rod 702 of FIGS. 7-8B). The lens actuation system may further include articulating arms (e.g., first arm pair 444 and second arm pair 446 of FIGS. 4A-4D) coupling the connecting linkage to a frame (e.g., frame 148 of FIGS. 1 and 4A-8B) housing the lens.

The method 2500 proceeds to 2506, wherein the movement or rotation is sensed via a sensor. Sensing may include the sensor detecting a detectable element (e.g., detectable element 412 of FIGS. 4D, 7, and 8A) such as a magnet. For example, a magnetic sensor may detect a position of a magnet. The magnet may be located off-center of a rotating component of the lens actuation system, such as the flywheel, to sense rotation thereof. Alternatively, the magnet may be located on the frame that houses the lens to sense the linear movement thereof. Motion of the magnet, or other detectable element, relative to the sensor may be used to track rotation (e.g., motor output) or the movement of the lens.

The method 2500 may include moving the lens to a target position or at a target frequency at 2508, such as by executing the method 2400 of FIG. 24 as described below.

The method 2500 ends. The method 2500 may be executed continuously throughout operation of the lens actuation system. Steps of the method 2500 may occur concurrently and/or in different orders than provided in the method 2500.

Turning to FIG. 24, a flowchart of a method 2400 is shown for operating a lens actuation system, such as the lens actuation system 400, where rotational motion of a flywheel (e.g., flywheel 406 of FIGS. 4A-8B) is translated to linear oscillating motion of a lens (e.g., lens 150 of FIGS. 1-8B). The method 2400 may be executed as part of the method 2500 of FIG. 5. The method 2400 may be performed by a control system, such as the control system 180 of FIG. 1, by executing instructions stored in non-volatile memory of a controller or the control system, such as the controller 170 of FIG. 1.

The method **2400** begins at **2402**, wherein a target position or frequency of the lens is determined. The target position may be a location within a housing of an optical device (e.g., optical device **100** of FIGS. **1-8B**) along a linear path between and including an upstream position and a downstream position. The target frequency may be a target oscillating frequency at which the lens linearly oscillates between the upstream and the downstream position. For example, the target position or the target frequency may be part of a pre-programmed routine stored in the nonvolatile memory of the controller comprising a series of target positions and/or target frequencies. As another example, the target position or the target frequency may be input manually by a user.

The method **2400** proceeds to **2404**, wherein the lens is moved linearly by actuating a motor (e.g., motor **140** of FIGS. **1, 4A-4D, and 7-8B**) to rotate the flywheel. For example, rotating the flywheel via the motor may drive motion of a connecting linkage and articulating arms physically coupled to a frame housing the lens. The motor may operate continuously, in a single rotational direction, in order to move the lens back and forth along the linear path. In this way, deceleration and stopping of the motor may not be demanded to reverse the linear direction of the lens motion. The flywheel may rotate 360 degrees for each cycle of lens movement. The direction of rotation of the motor and the flywheel may be selected according to which direction is kinematically favorable. Additionally, or alternatively, the direction of rotation may be selected according to a comparison of the current and target positions. For example, rotation may occur in the direction which may reach the target position faster. The controller may control operation of the motor, such as output speed of the motor.

The method **2400** proceeds to **2406**, wherein a measured position or frequency of the flywheel is measured. For example, the measured frequency of the flywheel may be a number of full rotations per unit of time (e.g., per second). The measured position of the flywheel may be an angular position. The measured position and frequency may be measured by a sensor (e.g., magnetic sensor) detecting a detectable element (e.g., magnet) positioned off-center of the flywheel, for example along a circumference of the flywheel. The sensor may be part of the control system and communicatively coupled to the controller. In some examples, both the position and the frequency are measured. Other metrics may also be measured, such as a rotational direction of the flywheel.

The method **2400** proceeds to **2408**, wherein a current position or frequency of the lens is determined. For example, if there is a target position, the current position of the lens may be determined therefrom. For example, if there is a target frequency, the current frequency of the lens may be determined therefrom. The current frequency of the lens may be approximately equal to the measured frequency of the flywheel. The linear position of the lens may correspond directly to the angular position of the flywheel. The orientation of the velocity of the lens may correspond to the rotational direction of the flywheel.

The method **2400** proceeds to **24010**, wherein it is determined whether the current position or the current frequency of the lens respectively matches the target position or the target frequency. For example, the controller may compare the target frequency with the current frequency determined at **2408**. Alternatively, the controller may compare the target position with the current position determined at **2408**. If the corresponding target and current values are within a threshold difference, it may be determined that they match (e.g.,

the target condition is met). Alternatively, if the corresponding target and current values are outside of the threshold difference, it may be determined that they do not match (e.g., the target condition is not met).

If the current position does not match the target position or the current frequency does not match the target frequency (NO at **2410**), the method **2400** proceeds to **2412**, wherein the current position or the current frequency of the lens is adjusted. For example, the current position or the current frequency of the flywheel may be adjusted via actuation of the motor in order to adjust the position or frequency of the lens.

If the current position matches the target position or the current frequency matches the target frequency (YES at **2410**), the method **2400** proceeds to **2414**, wherein respectively, the lens is stopped at the target position or moving the lens at the current frequency is continued. For example, if the target position is determined at **2402** and the target position matches the current position of the flywheel, movement of the lens may be stopped due to having reached the target position. Stopping the motion of the lens may include stopping output of the motor, and therefore stopping rotation of the flywheel. Alternatively, if the target frequency is determined at **2402**, and the target frequency matches the current frequency at **2410**, the target reached, and thus operation under the current conditions may continue. Continuing at the current frequency may include maintaining the current output of the motor. The motor may generate continuous output in a single rotational direction in order to oscillate the lens at the frequency of rotation.

The method **2400** ends after **2414**. By executing the method **2400**, the target frequency or the target position of the lens is reached. The method **2400** may be iteratively repeated throughout operation of the optical device **100** to produce desired optical effects.

As described above, a coupling system in accordance with the present disclosure may fix a plurality of the optical device **100** and/or other fixtures in vertical arrays, horizontal arrays, or a lattice or grid formation. The coupling system of the present disclosure may include one or more frames and one or more coupling devices assembled together and vertically hung from a fixed structure. In this way, the optical devices **100** may be supported by the coupling system throughout actuation, such as throughout movement of a movable front lens (e.g., lens **150**) via a lens actuation system (e.g., lens actuation system **400**), for example by implementing the method **2400** of FIG. **24**.

An example of a coupling system **2000** is shown schematically in FIG. **20**. A set of reference axes **901**, including an x-axis, a y-axis, and a z-axis, are shown in FIGS. **9-23** for comparison of the orientations shown therein. In at least some examples, the z-axis may be a vertical axis, and the y-axis and the x-axis may be horizontal axes. Additionally or alternatively, the z-axis of the reference axes **901** may be parallel with the z-axis of the reference axes **101** in FIGS. **1-8B**. Additionally or alternatively, the z-axis may be parallel with a direction of gravity. The coupling system **2000** may include a plurality of frames **2002**. In one example, each of the plurality of frames **2002** is identical. As shown, the plurality of frames **2002** may be coupled to a corresponding fixture **2004**.

The corresponding fixture **2004** may be an optical device (e.g., optical device **100** of FIGS. **1-8B**), such as a light fixture. In at least some examples, the fixture may include an LED in face-sharing contact with a light mixing rod, configured to produce optical effects. Additionally or alternatively, the fixture **2004** may include a lens actuation system

adapted to move a lens therein. In another example, the fixture **2004** may be a different optical device, or other type of fixture, such as an audio device. In some examples, the fixtures **2004** may be identical to one another. In another example, the fixtures **2004** may include various types of fixtures.

The coupling system **2000** further includes the control system **180** comprising the controller **170**. The control system **180** may control each of the fixtures **2004**. For example, the control system **180** may execute instructions stored in non-volatile memory of the controller **170** to move lenses within the fixtures **2004**. The lenses may be moved synchronously or asynchronously. The control system **180** may also rotate, swivel, or otherwise move the fixtures **2004**. In examples where the fixtures **2004** are optical devices, the control system **180** may also control optical effects produced by the fixtures **2004**, such as by controlling colors emitted by LEDs therein (e.g., LED element **112** and back light LEDs **127** of FIGS. **1** and **6**). The coupling system **2000** may support the fixtures **2004** throughout a range of motion of the fixtures **2004**. For example, due to the structure of the coupling system **2000**, the fixtures **2004** may be supported throughout movement of lenses within the fixtures **2004**. The coupling system **2000** may remove load-bearing burden from the fixtures **2004** and dampen vibrations produced by movement thereof.

The plurality of frames **2002** are interlocked via a plurality of coupling devices physically coupled to mounts of different frames. For example, a coupling device may be physically coupled to a mount of a first frame **2002a** coupled to a first fixture **2004a**, and the coupling device may also be physically coupled to a mount of a second frame **2002b** coupled to a second fixture **2004b**. A top **2006** of the coupling system **2000** may be attached to a fixed structure such that the coupling system **2000** hangs therefrom.

In the example of FIG. **20**, the plurality of frames **2002** interlock with one another to arrange the plurality of fixtures in a column. Further frames and coupling devices may be included to arrange the plurality of fixtures in a row and/or into a grid with uniform spacing between each of the plurality of fixtures. In one example, spacing between neighboring fixtures of the plurality of fixtures may prevent fixture-to-fixture contact as the fixtures rotate, spin, oscillate, or move in another way. Additionally, the frames **2002** may be removable coupled via the coupling devices such that the frames **2002** may be rearranged.

Turning now to FIGS. **9** and **10**, a frame **900** is shown, which is an example of the frames **2002** of FIG. **20**.

The frame **900** may include a ring **918**. The frame **900** may be configured to circumferentially surround a fixture (e.g., fixture **2004** of FIG. **20**). The frame **900** may include a central opening **932** through which the fixture may be arranged. The frame **900** may further include a plurality of bosses **922** with a plurality of fasteners **924** extending therethrough that physically couple the frame **900** to the fixture in the central opening **932**. For example, the fasteners **924** may extend through the bosses **922** and into a housing of the fixture, such as the housing **102** of the optical device **100** shown in FIGS. **1** and **6**. In this way, the fasteners may mechanically couple the frame **900** to the fixture such that the frame **900** circumferentially surrounds the fixture. The frame **900** may be positioned along a center of gravity of the fixture, which may provide additional support to the fixture.

The frame **900** may further include a plurality of mounts **902** arranged along a circumference of the ring **918**. The plurality of mounts **902** may be equally spaced from one another. For example, the plurality of mounts **902** may be

equidistantly circumferentially arranged along the frame **900**. The plurality of mounts **902** may be arranged in a hexagon shape, for examples where there are six mounts. The mounts **902** may extend parallel with the x-direction.

In one example, there are an even number of the plurality of mounts **902**. Alternatively, there may be an odd number of the plurality of mounts **902**. In one example, a first pair of mounts **904** may face a first direction (e.g., positive z-direction), a second pair of mounts **906** may face a second direction (e.g., negative z-direction), opposite the first direction. A distance **934** between mounts of the first pair of mounts **904** and the second pair of mounts **906** may be equal to or less than a diameter **914** of the frame **900**. A third mount **908** may be positioned diametrically opposite to a fourth mount **910**, wherein the third mount **908** faces a third direction (e.g., negative y-direction) and the fourth mount **910** faces a fourth direction (e.g., positive y-direction) opposite to the third direction. The third direction and the fourth direction may be normal to each of the first direction and the second direction.

The first direction and the second direction may be vertical directions while the third direction and the fourth direction may be horizontal directions. Thus, there may be more mounts **902** facing vertical directions than mounts **902** facing horizontal directions. There may be at least as many mounts **902** facing vertical directions than mounts **902** facing horizontal directions. For example, more mounts **902** may be demanded in vertical directions for vertical load bearing than in horizontal directions for horizontal stabilization. In this way, more coupling devices may be used for vertical load bearing than horizontal stabilization, as described further below. In alternative examples, there may be two or more mounts **902** facing each of the first direction, the second direction, the third direction, and the fourth direction.

In one example, the first pair of mounts **904** and the second pair of mounts **906** may extend radially outward from the frame **900** further than the third mount **908** and the fourth mount **910**. The first pair of mounts **904** and the second pair of mounts **906** may include a body **916** that extends from the frame **900** and includes a triangular shape. The body **916** may level a curvature of the ring **918** such that the mounts of the first pair of mounts **904** are level to one another. Similarly, the mounts of the second pair of mounts **906** are level to one another. The third and fourth mounts **908**, **910** may not include a body configured like the body **916** to face the horizontal directions due to being tangential with the ring **918** according to the position along the ring **918**.

The frame **900** may further include guide points **912**. The guide points **912** may be configured to retain wires coupled to a fixture, such as a fixture shown in FIG. **20**. The guide points **912** may be symmetrically arranged about the frame **900**. In one example, neighboring guide points **912** may be separated by at least one of the plurality of mounts **902**. The guide points **912** may ensure the wires do not interfere with assembly of the coupling system or movement of the fixtures within the coupling system.

The frame **900**, comprising the mounts **902**, the guide points **912**, and the bosses **922** may be symmetric. For example, the frame **900** may be symmetric across a first symmetry plane **1002** that is parallel with a vertical direction (e.g., z-direction). Additionally or alternatively, the frame **900** may be symmetric across a second symmetry plane **1004**, where the second symmetry plane **1004** is parallel

with a horizontal direction (e.g., y-direction). The second symmetry plane **1004** may be perpendicular to the first symmetry plane **1002**.

Turning now to FIG. **11**, it shows a rear side **1100** of the frame **900**. The rear side **1100** may be open and reveal a support structure **1102** of the frame **900**. The support structure **1102** may include a plurality of triangles that extend between outer and inner circumferences of the frame **900**. In this way, the frame **900** may withstand forces imposed thereon due to supporting the fixture. The frame **900** may take load bearing forces away from the fixture positioned in the opening **932**.

FIGS. **21A** and **21B** show a front view **2110** and rear view **2120**, respectively, of one of the mounts **902**. The front view **2110** is an enlarged view of a portion **930** of FIG. **9**. The rear view **2120** is an enlarged view of a portion **1130** of FIG. **11**.

The mount **902** includes a receptacle **2102** adapted to receive a coupling device. The receptacle **2102** may be defined by two rails **2104** and an end wall **2106** protruding from a surface **2112**. The surface **2112** may determine the direction the mount **902** faces. For example, a mount **902** may be described as facing a direction which the corresponding surface **2112** faces.

The end wall **2106** may be perpendicular to the surface **2112**. The end wall **2106** may be trapezoidal. Alternatively, the end wall **2106** may be rectangular, ovalar, or any other shape according to geometry of the coupling device. The end wall **2106** may include one or more openings **2108**. For example, the openings **2108** may allow visibility of the coupling device when positioned in the receptacle **2102**.

The two rails **2104** may be perpendicular to the end wall **2106**. The two rails **2104** may extend from the angled sides of the trapezoidal shape of the end wall **2106**. The two rails **2104** may extend at a non-perpendicular angle from the surface **2112**. In other examples, the two rails may be perpendicular to the surface **2112**. The two rails **2104** may bend (e.g., curve, corner, etc.) towards each other. In this way, the two rails **2104** may partially enclose the receptacle **2102**. For example, portions **2116** of the two rails **2104** that are further from the surface **2112** may be parallel with the surface **2112**. The two rails **2104** may be symmetrical with one another.

A mount opening **2114** may extend from the surface **2112** towards the ring **918**. The two rails **2104** may be arranged on opposite sides of the mount opening **2114**. The mount opening **2114** may be spaced away from the rear side **1100**. The mount opening **2114** may extend along the surface **2112** towards the end wall **2106**. In some examples, the mount opening **2114** may also extend upwards along the end wall **2106**. In such examples, the mount opening **2114** may be spaced away from the one or more openings **2108**. Additionally or alternatively, the mount opening **2114** may be spaced away from the rails **2104**. In some examples, the mount opening **2114** is a through-hole. In other examples, the mount opening **2114** may be a recess, or blind hole shaped to receive a latch of a coupling device as described further below.

Turning now to FIG. **12**, it shows a coupling device **1200**. The coupling device **1200** may be a clip, in one example. Specifically, the coupling device **1200** may be a spring-loaded clip. The coupling device **1200** may be used to couple two frames together by physically and reversibly coupling to their respective mounts. The coupling device **1200** may have an engaged position and a disengaged position. In the engaged position, the coupling device may lock the two frames together. In the disengaged position, the coupling device may not be physically coupled with the two frames.

The coupling device **1200** may be moved between the engaged and disengaged positions by adjusting latches such as by actuating levers of the coupling device, as described further below.

The coupling device **1200** may include a body **1202**. The body **1202** may be symmetric and complementarily shaped relative to the plurality of mounts **902** of FIGS. **9-11** and **21A-22**. For example, the body **1202** may include lobe-shaped recesses **1204** that each receives a rail (e.g., one of the two rails **2104** of FIGS. **21A-22**) of a mount of the plurality of mounts. A top **1206** or a bottom **1208** may interface with a receptacle of the mount (e.g., receptacle **2102** of FIGS. **21A-22**) such that the coupling device **1200** slidably engages with the mount. Specifically, the lobe-shaped recesses **1204** may slidably engage with the rails. For example, the body **1202** may include four lobe-shaped recesses **1204** with a first pair **1222** of the lobe shapes recesses **1204** adjacent to the top **1206** and a second pair **1224** of lobe-shaped recesses **1204** adjacent to the bottom **1208**. The first pair **1222** may receive rails of a first mount positioned in face-sharing contact with the top **1206**, and the second pair **1224** may receive rails of a second mount positioned in face-sharing contact with the bottom **1208**. For example, a hinge end **1226** may be inserted into receptacles of the first mount and the second mount, and the coupling device **1200** may slide theretowards to slidably engage with the first and second mounts such that a lever end **1228** is positioned where the hinge end **1226** was initially inserted. The coupling device **1200** may also include protrusions **1232** from sides of the body **1202**. The protrusions **1232** may be perpendicular to the recesses **1204**. The protrusions **1232** may be configured to secure the rails of the corresponding mount within the recesses **1204**. Engagement of the coupling device **1200** with mounts is described in greater detail with regard to FIGS. **15-19**.

As another example, the coupling device **1200** may include rails shaped similarly to the rails **2104**, and the mounts **902** may include complementary lobe-shaped recesses, similar to the recesses **1204**. In this way, the coupling device **1200** and the mounts **902** may be slidably engaged via complementary rails and recesses, where the mounts **902** may include either the rails or the recesses, and the coupling device **1200** may include the other of the rails or the recesses.

The coupling device **1200** may further include a latch **1212**. In one example, the latch **1212** is a first latch adjacent to the top **1206**. The latch **1212** may be moveable via a first lever **1214**. The latch **1212** may be spring-loaded. In the position of FIG. **12**, the latch **1212** protrudes through a surface of the top **1206**. In one example, the position of FIG. **12** is an engaged (e.g., locked) position. The latch **1212** may extend through an opening of the mount (e.g., mount opening **2114** of FIGS. **21A-22**) and lock the coupling device **1200** to the mount. In one example, the latch **1212** may not be removed from a mount to which it is locked without actuating the first lever **1214** to a disengaged position.

The disengaged (e.g., unlocked) position is shown in greater detail with respect to FIG. **14A**. Therein, the disengaged position includes the latch **1212** being flush with (or below) the surface of the top **1206**. The latch **1212** does not protrude through the opening of the top **1206** and the coupling device **1200** may be disengaged (e.g., separated, removed, etc.) from a corresponding mount.

Turning now to FIG. **13**, it shows a cross-sectional view of the coupling device **1200**. Therein, a second latch **1312** is shown. The second latch **1312** is moved via a second lever **1314**. The first latch **1212**, the second latch **1312**, the first

lever 1214, and the second lever 1314 are coupled to a spring 1322. The levers 1214, 1314 may extend beyond the body 1202, allowing a user to actuate the levers 1214, 1314. The first latch 1212 may be moveable via the first lever 1214 and the second latch 1312 may be moveable via the second lever 1314.

The spring 1322 may be flat and curved to fold over in half. For example, the spring 1322 may be described as having three integral portions including a first arm 1334, a second arm 1336, and a curved portion 1332 interposed therebetween. The curved portion 1332 may be closer to the hinge end 1226 than the arms 1334, 1336. The spring 1322 may be resistant to compression. For example, the arms 1334, 1336 may press against inner surfaces 1338 of the body 1202. Specifically, the first arm 1334 may press against the top 1206 and the second arm 1336 may press against the bottom 1208. The locked position where the levers 1214, 1314 are furthest apart and the latches 1212, 1312 protrude out of the body 1202 may be a resting position of the coupling device 1200. In this way, the latches 1212, 1312 may be spring-loaded by the spring 1322 such that the locked position is the resting position of the coupling device 1200.

By moving the levers 1214, 1314 towards each other, the spring 1322 may be compressed, curving further at the curved portion 1332. For example, a user may apply pressure to the levers 1214, 1314 by pinching the levers 1214, 1314 together. The levers 1214, 1314 may include gripping surfaces 1360 with textures such as a plurality of parallel protrusions for the user to grasp the levers 1214, 1314 more firmly (e.g., with greater friction). The levers 1214, 1314 may be separated from the top 1206 and the bottom 1208 of the body 1202 when the spring 1322 is compressed. There may be a gap between the levers 1214, 1314 and the inner surfaces 1338 when the spring 1322 is compressed.

The first and second arms 1334, 1336 may include tabs 1330 on ends opposite the curved portion 1332, closer to the lever end 1228. Each of the first and second arms 1334, 1336 may include two tabs 1330 extending therefrom. The tabs 1330 of the first arm 1334 may bend away from tabs 1330 of the second arm 1336 such that the tabs 1330 extend towards the respective adjacent levers 1214, 1314. The levers 1214, 1314 may include indents 1362 wherealong the tabs 1330 slide as the spring 1322 compresses and expands. In this way, compression of the spring 1322 may be guided relative to the levers 1214, 1314 by the indents 1362 aligning the tabs 1330 with the levers 1214, 1314. Additionally, protrusions 1364 extending laterally from the indents 1362 may stop the tabs 1330 from moving too far towards the lever end 1228. For example, if the spring 1322 were compressed enough that the latches 1212, 1312 do not extend into the body 1202, misalignment of the latches 1212, 1312 and the openings in the top 1206 and the bottom 1208 may occur. Inclusion of the protrusions 1364 may bound a range of motion of the spring 1322 to prevent excess compression where the latches 1212, 1312 separate from the body 1202.

The latches 1212, 1312 may extend through openings 1348 in the first arm 1334 and the second arm 1336. For example, the latches 1212, 1312 may include triangular protrusions 1350 extending through the openings 1348. The protrusions 1350 may remain through the openings 1348 throughout actuation of the spring 1322. In this way, the protrusions 1350 may prevent the spring 1322 from moving laterally, for example towards the lever end 1228. The protrusions 1350 may guide movement of the spring 1322

upon actuation via the levers 1214, 1314 such that the arms 1334, 1336 move vertically to compress or expand the spring 1322.

The spring 1322 may curve around a rivet 1346. The rivet 1346 may extend through the levers 1214, 1314 and the body 1202 at the hinge end 1226. When compressed, the spring 1322 may bend further around the rivet 1346 and the levers 1214, 1314 may hinge around the rivet 1346. The rivet 1346 may ensure the spring 1322 remains in place, relative to the body 1202. Specifically, the rivet 1346 may prevent lateral movement of the spring 1322 towards the lever end 1228. For example, the curved portion 1332 may be interposed between the body 1202 and the rivet 1346. Thus, the rivet 1346, like the protrusions 1350 and the tabs 1330, may stabilize movement of the spring 1322. The rivet 1346 may not be included in some examples.

The latches 1212, 1312 may further include curved portions 1352. The curved portions 1352 may include curved surfaces in contact with the levers 1214, 1314 and with the arms 1334, 1336. The curved surfaces of the curved portions 1352 may allow for smooth transition during actuation of the spring 1322 via the levers 1214, 1314. Additionally, the curved portions 1352 may be sized larger than the arm openings 1348 and lever openings 1354 where through the latches 1212, 1312 extend. In this way, the curved portions 1352 may be interposed between the respective levers 1214, 1314, and the arms 1334, 1336. Thus, as pressure is applied to the levers 1214, 1314, the levers 1214, 1314 may press on the spring 1322 via the curved portions 1352 and/or direct contact therebetween. When pressure is released from the levers, 1214, 1314, the spring 1322 may expand back to the resting position.

The spring 1322 is illustrated in an expanded position in the example of FIG. 13. When the coupling device 1200 is in the disengaged position (e.g., unlocked position), as shown in FIG. 14A, the spring 1322 may be in a compact position, wherein an arm distance 1342 between the arms 1334, 1336 of the spring 1322 is reduced, compared to the expanded position. Additionally, a latch distance 1344 between the first latch 1212 and the second latch 1312 is reduced in the disengaged position, compared to the engaged position. The first latch 1212 and the second latch 1312 may be retractable to the unlocked position via the first lever 1214 and the second lever 1314, respectively. Thus, the first latch 1212 and the second latch 1312 may reversibly lock and unlock, for example respectively with a first mount opening of a first frame and a second mount opening of a second frame.

Turning to FIG. 14A, the coupling device 1200 is shown in the disengaged (e.g., unlocked) position. In the disengaged position, the latches 1212, 1312 do not protrude out of the body 1202. For example, the first latch 1212 and the second latch 1312 may be flush with the top 1206 and the bottom 1208, respectively. To reach the disengaged position from the resting engaged position, a user may manually apply pressure to the levers 1214, 1314 to compress the spring 1322 (not shown in FIG. 14A) and retract the latches 1212, 1312. In this way, the coupling device 1200 may be allowed to slide along surfaces in face-sharing contact with the top 1206 and/or the bottom 1208.

Further, the coupling device 1200 may include visual indicators, including a first indicator 1402 and a second indicator 1404, to signal whether the latches 1212, 1312 are in the engaged or disengaged position when the latches 1212, 1312 are not directly visible. For example, when the coupling device 1200 is positioned to engage with the mount of a frame, the latch may not be visible due to being in

contact with the mount. Thus, the indicators **1402**, **1404** may provide a simple visual confirmation of whether the coupling device **1200** is engaged with the mount. The first indicator **1402** may indicate whether the latch **1212** is protruding from the body **1202**. For example, if the first indicator **1402** is visible, it may be concluded that the first latch **1212** is not locked. If the first indicator **1402** is covered by the lever **1214**, the latch **1212** may be in the locked position. Likewise, the second indicator **1404** may indicate whether the second latch **1312** is protruding from the body **1202**. For example, if the second indicator **1404** is visible, it may be concluded that the second latch **1312** is not locked. If the second indicator **1404** is covered by the second lever **1314**, the second latch **1312** may be in the locked position. In this way positions of the latches **1212**, **1312** may be determined without directly seeing the latches **1212**, **1312** in order to ensure engagement between the coupling device and the mount of the frame when desired.

In one example, the first lever **1214** and the second lever **1314** may be independently actuated such that one of the levers **1214**, **1314** may be in the disengaged position and the other may be in the engaged position. For example, the first lever **1214** may be actuated and the first latch **1212** may retract into an interior space of the coupling device **1200** while the second latch **1312** protrudes out of the bottom **1208** due to the second lever **1314** not being actuated. By doing this, the coupling device **1200** may remain locked (e.g., engaged) to a first mount of a first frame via the second latch **1312** while being unlocked (e.g., disengaged) from a second mount of a second frame, different than the first frame, via the first latch **1212** being retracted.

For example, turning to FIG. **14B**, the coupling device **1200** is shown in a position where the second latch **1312** (not shown) is locked and the first latch **1212** is not locked. Because the second indicator **1404** of FIG. **14A** is blocked by the lever **1314**, it may be concluded (e.g., by an installer) that the second latch **1312** is in the locked position. Thus, in the position of FIG. **14B**, if the bottom **1208** is in face-sharing contact with a surface, the latch **1312** may be protruding through the surface and interlocked therewith.

Conversely, because the first indicator **1402** is visible, it may be concluded (e.g., by the installer) that the first latch **1212** is protruding less than the maximum distance **1356** of FIG. **13** (e.g., not protruding at all or is protruding up to and not including the distance **1356**), and thus is not in the locked position. Therefore, in the position of FIG. **14B**, if the top **1206** is in face-sharing contact with a surface, the latch **1212** may not be extending fully therethrough and thus may not be securely interlocked therewith. During assembly of the coupling system, an installer may check for indicators such as the first indicator **1402** to ensure that the coupling devices **1200** are securely locking components such as frames together. If indicators are visible, the installer may adjust the coupling device **1200** until the indicators are not visible to correct misplacement of the coupling device **1200**. In this way, structural integrity of the coupling system may be visually confirmed during and following assembly.

Returning to FIG. **13**, in one example, portions **1358** of each of the first latch **1212** and the second latch **1312** that protrude from the body **1202** may include a triangular shape. The first latch **1212** and the second latch **1312** may be ramped in a direction such that the coupling device **1200** may be inserted into a mount without actuating the first lever **1214** or the second lever **1314**. For example, the latches **1212**, **1312** may be ramped towards the lever end **1228**. That is, in the locked position, the latches **1212**, **1312** may slope from flush with the body **1202** nearest the hinge end **1226**,

up to a distance **1356** of maximum protrusion from the body **1202** nearest the lever end **1228**. In this way, for example, as a surface (e.g., of a mount) slides from the hinge end **1226** towards the latch **1212** along the top **1206**, the latch may remain protruding from the top **1206**. When the surface reaches the latch **1212** and continues thereover, the latch **1212** may be gradually pushed downwards by the surface according to incline of the ramp shape of the portion of the latch **1212** that protrudes from the body **1202** in the locked position. Thus, the surface being in face-sharing contact with the top **1206** and sliding across the ramped slope of the latch **1212** may retract the latch **1212**, rather than actuation of the lever **1214**. Although not directly actuated, the lever **1214** may move towards the lever **1314** as a consequence of pushing the latch **1212** into the body **1202**. For example, pushing the latch **1212** downwards may directly push the lever **1214** and the first arm **1334** downwards.

The surface may comprise an opening that, when aligned with the latch **1212**, allows the latch **1212** to extend there-through, locking the latch **1212** with the surface. For example, the coupling device **1200** may slide along the surface **2112** of FIG. **21A** until the latch **1212** is aligned with the mount opening **2114**, allowing the latch **1212** to spring therein and interlock with the corresponding mount **902**.

The latch **1312** may be similarly pushed upwards via a surface sliding in face-sharing contact along the bottom **1208** until reaching an opening to spring into. As described above, the latches **1212**, **1312** may be independent of one another. Thus, the latch **1212** may be pushed down by a first surface sliding across the top **1206** while the latch **1312** remains in the locked position. Prior, following, or alternatively to the latch **1212** being pushed downward, the latch **1312** may be pushed upward by a second surface sliding across the bottom **1208** while the latch **1212** remains in the locked position. Additionally or alternatively, the latch **1212** and the latch **1312** may be pushed towards each other concurrently by the first and second surfaces sliding against the top **1206** and the bottom **1208**.

Thus, the latches **1212**, **1312** may be locked with surfaces (e.g., of mounts on frames) to physically couple the surfaces with or without actuating the levers **1214**, **1314**. Moreover, the latches **1212**, **1312** may be locked with the surfaces sequentially or concurrently, allowing for flexibility in assembly, disassembly, or rearrangement of the coupling system comprising the surfaces and the coupling device **1200**.

As shown in FIG. **15**, the coupling device **1200** may be directed toward a mount of the plurality of mounts **902**. The hinge end **1226** of the coupling device **1200** may be closer to the mount **902** when positioned to engage therewith, compared to the lever end **1228**. For example, the coupling device **1200** may be directed toward the mount **902** such that the coupling device **1200** may engage with the mount **902** without actuating either the first lever **1214** or the second lever **1314**. A detailed view of a portion **1502** of FIG. **15** is shown in FIG. **22**. Therein, the coupling device **1200** is positioned with the hinge end **1226** facing the rear side **1100** of the frame **900** and aligned with the mount **902** along the x-direction. For example, the rails **2104** and the recesses **1204** may be parallel with the x-direction. Additionally, the bottom **1208** may be parallel with the surface **2112**.

A first distance **2202** from the end wall **2106** to an end of the mount opening **2114** may be approximately the same as a second distance **2204** between the hinge end **1226** and an end of the latch **1212** furthest from the hinge end **1226**. Though not shown in FIG. **22**, the end of the second latch **1312** furthest from the hinge end **1226** may also be spaced

away from the hinge end 1226 by the second distance 2204. In this way, when the latch 1312 is locked into the mount opening 2114, the latch 1312 may hold the coupling device firmly against the end wall 2106. Thus, the latch 1312 may prevent lateral movement in the x-direction of the coupling device 1200 relative to the frame 900 when in the locked position with the mount 902. Additionally, a third distance 2206 between the mount opening 2114 and the rear side 1100 of the frame 900 may be no longer than a fourth distance 2208 between the latches 1212, 1312 and the levers 1214, 1314. In this way, the levers 1214, 1314 may extend from the rear side 1100 such that the frame 900 does not impede the actuation of the levers 1214, 1314 when the coupling device 1200 is locked into the mount 902.

The coupling device 1200 is shown coupled to the mount 902 in FIG. 16. For example, the coupling device 1200 may slide along the x-direction from the position in FIG. 15 to the position in FIG. 16 such that the receptacle 2102 receives the coupling device 1200 and the recesses 1204 receive the rails 2104. Specifically, the second pair 1224 are shown coupled to the rails 2104 with the bottom 1208 (not shown in FIG. 22) in face-sharing contact with a surface of the mount 902 (e.g., the surface 2112 of FIGS. 21A-22). However, due to the symmetrical design of the coupling device 1200, the coupling device 1200 may be flipped such that the first pair 1222 engages with the rails 2104 and the top 1206 is in face-sharing contact with the surface of the mount 902.

The rails 2104 engaging with the recesses 1204 may maintain the position of the coupling device 1200 relative to the frame 900 in the radial and tangential directions with respect to the frame 900. The radial and tangential directions may be y- and z-directions respectively in the orientation of FIG. 16. Additionally or alternatively, the radial and tangential directions may be perpendicular to the rails 2104. Additionally, the protrusions 1232 may directly contact the rails 2104. In this way, the protrusions may further stabilize the position of the coupling device 1200 relative to the frame 900 in the radial direction with respect to the frame 900 (e.g., y-direction in the orientation of FIG. 16). For example, the rails 2104 may be interposed between the protrusions 1232 and the bottom 1208. In some examples, there may be additional protrusions extending from the coupling device 1200 that are configured to contact the rails 2104 in the locked position in order to add strength to the coupling between the coupling device 1200 and the frame 900 in the radial direction with respect to the frame 900.

The coupling device 1200 may be in face-sharing contact with the end wall 2106. That is, the hinge end 1226 may be pressed against an inner surface of the end wall 2106. For example, the latch 1312 being against an end of the mount opening 2114 (not shown in FIG. 16) closest to the rear side 1100 such that the latch is locked into the mount opening may maintain the position of the coupling device 1200 relative to the frame 900 in an axial direction (e.g., x-direction with respect to the orientation in FIG. 16). The axial direction may be parallel with the rails 2104.

The coupling device 1200 may engage with a second mount of a second frame. For example, the second mount may slidably engage with the first pair 1222 with the top 1206 in contact with a surface of the second mount, and the latch 1212 extending through an opening in the second mount. Additionally, further coupling devices 1200 may couple to other mounts 902 of the frame 900. For example, each of the mounts 902 may engage with a coupling device 1200. In one example, there may be up to six coupling devices 1200 coupled to the frame 900.

FIG. 17 shows a plurality of coupling devices 1700, which may be identical to the coupling device 1200 of FIG. 12, directed toward mounts of the plurality of mounts 902. As this occurs, the coupling device 1200 remains physically coupled to the mount of the plurality of mounts 902. In this way, coupling devices 1200 may be sequentially physically coupled to the frame 900 to build a coupling system in accordance with the present disclosure. Additionally, to disassemble or rearrange the coupling system, some coupling devices may remain engaged while others are disengaged. In this way, the coupling systems of the present disclosure may be modular and rearrangeable following initial installation.

FIG. 18 shows the plurality of coupling devices 1700 physically coupled to the plurality of mounts 902. The plurality of coupling devices 1700 may be physically coupled to the first pair of mounts 904. Each of the coupling devices 1700 may be physically coupled to a corresponding mount of the plurality of mounts 902. In the example of FIG. 18, three coupling devices 1200 are physically coupled to three different mounts of the plurality of mounts 902. In the example of FIG. 18, the three coupling devices 1200 may be configured to physically couple the frame 900 with up to three other frames, which may be identical to the frame 900. Two of the coupling devices 1200 may couple to two mounts of a second frame such that the three coupling devices shown in FIG. 18 may physically couple the frame 900 with up to two other frames. In the example of FIG. 18, up to three more coupling devices may be engaged with the frame 900. In this way, the frame 900 may be coupled with up to six other mounts, for example of three or more other frames, which may be identical to the mounts 902 of the frame 900.

FIG. 19 illustrates a detailed view of the coupling device 1200 engaged with the mount 902 of the first pair of mounts 904. As described above, the coupling device 1200 may be reversibly slidably engaged with the rails 2104 and locked with the opening 2114 via the latch 1312 of FIG. 13 such that the coupling device 1200 is in face-sharing contact with the end wall 2106. A second mount (e.g., of a second frame) may engage with the first pair 1222 and the latch 1212 of the coupling device 1200 to physically couple the mount 902 with the second mount. In the example of FIG. 12, the coupling device 1200 may be load-bearing, due to facing a vertical direction.

FIG. 23 illustrates an exemplary coupling system 2300 comprising a plurality of the frame 900 and a plurality of the coupling device 1200. The coupling devices 1200 may interconnect the frames 900, as described above. The frames 900 may be identical to one another. Likewise, the coupling devices 1200 may be identical to one another.

For example, a first mount 902a of a first frame 900a may be physically coupled with a second mount 902b of a second frame 900b via a first coupling device 1200a. The first mount 902a and the second mount 902b may face each other with the first coupling device 1200a interposed therebetween. The first mount 902a and the second mount 902b may be horizontally adjacent and the first coupling device 1200 may be a horizontal coupling device. Horizontal coupling devices which couple horizontally adjacent frames may provide support between columns.

The interconnected frames 900 and coupling devices 1200 may be physically coupled to an expandable bar 2302. The bar 2302 may be a rectangular bar. Alternatively, the bar 2302 may be cylindrical. An expandable element 2310 may slide in and out of the bar 2302 to lengthen the bar 2302 according to a structure whereon the coupling system 2300 is mounted. A fastener 2312 may fix the expandable element

2310 with the bar **2302** at a desired length. The expandable element **2310** may be inserted into a second expandable bar to connect the two expandable bars **2302**. In this way, additional columns of frames **900** may be added to the coupling system **2300**.

The expandable bar **2302** may include one or more bar mounts **2314**. The bar mount **2314** may be identical to the mounts **902** of the frames **900**. For example, the bar mount **2314** may include rails adapted to engage with lobe-shaped recesses of the coupling devices **1200** and a mount opening configured to receive a latch of the coupling devices **1200**. In this way, one or more of the coupling devices **1200** may engage with one of each of the mounts **902** and the bar mount **2314** to attach the frames **900** to the expandable bar **2302**. For example, a second coupling device **1200b** may physically couple a third mount **902c** of the first frame **900a** and a fourth mount **2314a** of the expandable bar **2302**. The third mount **902c** and the fourth mount **2314a** may be vertically adjacent such that the second coupling device **1200b** may be a vertical coupling device. Vertical coupling devices may be more load-bearing than horizontal coupling devices such as the first coupling device **1200**.

The bar **2302** may be secured to a structure. For example, the structure may include a rod that extends through sliding couplers **2304** atop the expandable bar **2302**. The sliding couplers **2304** may slide along the bar **2302** and be fixed to any points along the bar **2302**. The sliding couplers **2304** may include clamps **2308** and fasteners **2306** that tighten the clamps **2308** around the rod of the structure. In this way, the coupling system **2300** may hang from the structure at a top **2322** of the coupling system **2300**. In some examples, a bottom **2324** of the coupling system **2300** may also be secured, to the same structure or a different structure. In other examples, the coupling system **2300** may hang freely (e.g., without fixing other points than the top **2322**). The frames **900** and the coupling devices **1200** may withstand vertical load due to hanging, rather than fixtures arranged in the frames **900** and coupled thereto via the bosses **922** and the fasteners **924**. That is, the frames **900** and the coupling devices **1200** may reduce load upon the fixtures.

Vertically adjacent frames **900** may be spaced away from one another by a vertical distance **2326**. Horizontally adjacent frames **900** may be spaced away from one another by a horizontal distance **2328**. The vertical distance **2326** may be approximately equal to the horizontal distance **2328**. Alternatively, the vertical distance **2326** may be longer or shorter than the horizontal distance **2328**. The vertical distance **2326** and the horizontal distance **2328** may be great enough to allow actuation of the fixtures (e.g., rotation, swiveling, pivoting, etc.) without collision of the fixtures.

In this way, the coupling system **2300** may support a plurality of fixtures. The coupling system **2300** may include array (e.g., individual columns or rows), grid or lattice configurations. For example, each column may include up to fifteen frames. In another example, each column may include up to twenty frames. In another example, each column may include up to fifty frames. Any number of bars **2302** may be arranged side-by-side to extend rows and increase a number of columns of frames. Between adjacent frames **900** within a column (e.g., vertically adjacent frames), two coupling devices **1200** may engage with mounts of each of the frames **900**. Between adjacent frames **900** within a row (e.g., horizontally adjacent frames), one coupling device **1200** may engage with mounts of each of the frames **900**. In this way, there may be more vertical coupling devices than horizontal coupling devices due to vertical load being greater. In other examples, different

numbers of coupling devices may be used. For example, there may be one or more coupling devices between pairs of vertically adjacent frames and one or more coupling devices between pairs of horizontally adjacent frames.

The coupling system **2300** may support the fixtures throughout a range of motion of the fixtures, such as rotation. Additionally, in examples where the fixtures include a lens actuation system (e.g., lens actuation system **400** of FIGS. 4A-8B), the coupling system **2300** may support the fixtures throughout a range of motion of the lens (e.g., lens **150** moving between the upstream and downstream positions).

The technical effect of the optical device disclosed herein is to eliminate an air gap between an LED (e.g., LED element **112**) and a light mixing rod (e.g., light mixing rod **114**) in order to reduce discrepancy between optical effects produced by optical devices. For example, in previous examples, tolerances may result in the air gap having inconsistent dimensions. By pressing the LED and the light mixing rod together via a resilient member, the air gap is eliminated in the optical device of the present disclosure. In doing so, pressure may be applied to a glass cover of the LED. Thus, the thickness of the glass cover may be increased accordingly to withstand such pressure. The strength of the resilient member may be greater than forces imposed thereupon during operation of the optical device, including rotation and other movement. In this way, rather than the air gap protecting the LED from degradation (e.g., due to impact with the light mixing rod during movement), the secure face-sharing contact maintained between the LED and the light mixing rod by the resilient member (e.g., springs) may reduce (e.g., prevent) degradation to the LED during operation of the optical device.

The disclosure also provides support for an optical device, comprising: a light emitting diode (LED) element in face-sharing contact with a light mixing rod, where the face-sharing contact is maintained throughout actuation of the optical device by a resilient member. In a first example of the system, the resilient member includes a spring that is physically coupled to a light rod cap arranged at a first end of the light mixing rod and a surface whereon the LED element is mounted at a second end of the light mixing rod opposite the first end. In a second example of the system, optionally including the first example, the system further comprises: a fluid manifold arranged between a housing of the optical device and the LED element. In a third example of the system, optionally including one or both of the first and second examples, a plurality of heat exchangers fluidly coupled to the fluid manifold radially surround the light mixing rod. In a fourth example of the system, optionally including one or more of each of the first through third examples, a light rod housing comprises guiding features configured to center the light mixing rod relative to the LED element. In a fifth example of the system, optionally including one or more of each of the first through fourth examples, the light mixing rod and the LED element are a single integral piece. In a sixth example of the system, optionally including one or more of each of the first through fifth examples, the LED element comprises a transparent cover with a thickness of 0.5 mm or greater.

The disclosure also provides support for an optical device, comprising: a light emitting diode (LED) element held in face-sharing contact with a light mixing rod by a resilient member, where the light mixing rod is interposed between the LED element and a light rod cap, and the resilient member is physically coupled to the light rod cap and a surface on which the LED element is positioned. In a first

example of the system, the resilient member includes one or more compression springs. In a second example of the system, optionally including the first example, the light mixing rod is surrounded by a light rod housing that is parallel and in contact with the resilient member. In a third example of the system, optionally including one or both of the first and second examples, the light rod housing is radially surrounded by a plurality of heat exchangers oriented perpendicular to the light mixing rod. In a fourth example of the system, optionally including one or more or each of the first through third examples, the light rod housing comprises centering protrusions extending axially along the light rod housing and in contact with the resilient member. In a fifth example of the system, optionally including one or more or each of the first through fourth examples, the light rod housing is fixed to the surface and spaced away from the LED element. In a sixth example of the system, optionally including one or more or each of the first through fifth examples, the LED element comprises a transparent cover with a thickness between 0.55 and 1.0 mm.

The disclosure also provides support for an optical device, comprising: a light mixing rod pressed against a light emitting diode (LED) element by a resilient member with resistance to stretching greater than separating forces experienced during movement of the optical device, and a motor configured to drive linear oscillating motion of a lens towards and away from the LED element and the light mixing rod. In a first example of the system, the light mixing rod is interposed between the LED element and a light rod cap. In a second example of the system, optionally including the first example, the resilient member is physically coupled at a first end to the light rod cap and at a second end to a surface whereon the LED element is mounted. In a third example of the system, optionally including one or both of the first and second examples, the light rod cap is in face-sharing contact with the light mixing rod. In a fourth example of the system, optionally including one or more or each of the first through third examples, the resilient member includes two or more springs. In a fifth example of the system, optionally including one or more or each of the first through fourth examples, the LED element comprises a transparent cover between 0.7 and 0.9 mm in thickness.

In another representation, a system, such as a lens actuation system, includes a motor, a flywheel coupled to the motor via a shaft, a connecting linkage coupled to the flywheel via a rod, and a plurality of articulating arms extending from the connecting linkage to a frame of a lens. The flywheel is configured to rotate 360 degrees about an axis of rotation. The frame comprises retention features that engage with tracks arranged in a housing. In one example, the housing is a housing for an optical device. The lens actuation system may be arranged in a front section of the housing, separate from a rear section of the housing including an LED element and light mixing rod. The retention features are configured to move along a first axis and a second axis. The second axis is normal to the first axis. The second axis is parallel to the axis of rotation about which the flywheel rotates. The lens may be a front lens of an optical device. Each of the shaft, the flywheel, the connecting linkage, the rod, the plurality of articulating arms, the frame, and the lens is configured to move based on operation of the motor. The movement may result in the lens being in a downstream position, an upstream position, or a position therebetween based on a desired effect, such as a desired lighting effect.

As used in this application, an element or step recited in the singular and preceded with the word “a” or “an” should

be understood as not excluding plural of said elements or steps, unless such exclusion is stated. Furthermore, references to “one embodiment” or “one example” of the present disclosure are not intended to be interpreted as excluding the existence of additional embodiments that also incorporate the recited features. The terms “first,” “second,” and “third,” etc. are used merely as labels, and are not intended to impose numerical requirements or a particular positional order on their objects. The following claims particularly point out subject matter from the above disclosure that is regarded as novel and non-obvious.

It will be appreciated that the configurations and routines disclosed herein are exemplary in nature, and that these specific embodiments are not to be considered in a limiting sense, because numerous variations are possible. Moreover, unless explicitly stated to the contrary, the terms “first,” “second,” “third,” and the like are not intended to denote any order, position, quantity, or importance, but rather are used merely as labels to distinguish one element from another. The subject matter of the present disclosure includes all novel and non-obvious combinations and sub-combinations of the various systems and configurations, and other features, functions, and/or properties disclosed herein.

As used herein, the term “approximately” is construed to mean plus or minus five percent of the range unless otherwise specified.

The following claims particularly point out certain combinations and sub-combinations regarded as novel and non-obvious. These claims may refer to “an” element or “a first” element or the equivalent thereof. Such claims should be understood to include incorporation of one or more such elements, neither requiring nor excluding two or more such elements. Other combinations and sub-combinations of the disclosed features, functions, elements, and/or properties may be claimed through amendment of the present claims or through presentation of new claims in this or a related application. Such claims, whether broader, narrower, equal, or different in scope to the original claims, also are regarded as included within the subject matter of the present disclosure.

The invention claimed is:

1. An optical device, comprising:

a light emitting diode (LED) element in face-sharing contact with a light mixing rod, where the face-sharing contact is maintained throughout actuation of the optical device by a resilient member; and
a fluid manifold arranged between a housing of the optical device and the LED element.

2. The optical device of claim 1, wherein the resilient member includes a spring that is physically coupled to a light rod cap arranged at a first end of the light mixing rod and a surface whereon the LED element is mounted at a second end of the light mixing rod opposite the first end.

3. The optical device of claim 1, wherein a plurality of heat exchangers fluidly coupled to the fluid manifold radially surround the light mixing rod.

4. The optical device of claim 1, further comprising a light rod housing comprises guiding features configured to center the light mixing rod relative to the LED element.

5. The optical device of claim 1, wherein the light mixing rod and the LED element are a single integral piece.

6. The optical device of claim 1, wherein the LED element comprises a transparent cover with a thickness of at least 0.5 mm.

7. An optical device, comprising:

a light emitting diode (LED) element held in face-sharing contact with a light mixing rod by a resilient member,

35

where the light mixing rod is interposed between the LED element and a light rod cap, and the resilient member is physically coupled to the light rod cap and a surface on which the LED element is positioned.

8. The optical device of claim 7, wherein the resilient member includes one or more compression springs.

9. The optical device of claim 7, wherein the light mixing rod is surrounded by a light rod housing that is parallel and in contact with the resilient member.

10. The optical device of claim 9, wherein the light rod housing is radially surrounded by a plurality of heat exchangers oriented perpendicular to the light mixing rod.

11. The optical device of claim 9, wherein the light rod housing comprises centering protrusions extending axially along the light rod housing and in contact with the resilient member.

12. The optical device of claim 9, wherein the light rod housing is fixed to the surface and spaced away from the LED element.

13. The optical device of claim 7, wherein the LED element comprises a transparent cover with a thickness between 0.55 and 1.0 mm.

36

14. An optical device, comprising:
 a light mixing rod pressed against a light emitting diode (LED) element by a resilient member with resistance to stretching greater than separating forces experienced during movement of the optical device; and
 a motor configured to drive linear oscillating motion of a lens towards and away from the LED element and the light mixing rod.

15. The optical device of claim 14, wherein the light mixing rod is interposed between the LED element and a light rod cap.

16. The optical device of claim 15, wherein the resilient member is physically coupled at a first end to the light rod cap and at a second end to a surface whereon the LED element is mounted.

17. The optical device of claim 15, wherein the light rod cap is in face-sharing contact with the light mixing rod.

18. The optical device of claim 14, wherein the resilient member includes two or more springs.

19. The optical device of claim 14, wherein the LED element comprises a transparent cover between 0.7 and 0.9 mm in thickness.

* * * * *