



US007307542B1

(12) **United States Patent**
Chandler et al.

(10) **Patent No.:** **US 7,307,542 B1**
(45) **Date of Patent:** **Dec. 11, 2007**

(54) **SYSTEM AND METHOD FOR
COMMISSIONING ADDRESSABLE
LIGHTING SYSTEMS**

(75) Inventors: **Scott S. Chandler**, Payson, UT (US);
Daniel Patten, Pleasant Grove, UT
(US); **Paul T. Clegg**, Lindon, UT (US);
Peter L. Taylor, Orem, UT (US)

(73) Assignee: **Vantage Controls, Inc.**, Orem, UT
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 254 days.

(21) Appl. No.: **10/934,777**

(22) Filed: **Sep. 3, 2004**

Related U.S. Application Data

(60) Provisional application No. 60/500,193, filed on Sep.
3, 2003.

(51) **Int. Cl.**
H04Q 5/22 (2006.01)

(52) **U.S. Cl.** **340/825.52**; 340/825.53;
340/825.72; 710/105; 710/104; 710/305

(58) **Field of Classification Search** 340/825.52,
340/825.53, 825.72, 825.71, 825.4; 710/8-11,
710/104-106, 305, 306, 314, 315; 315/316-317,
315/322-324, 929

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,482,773 A 9/1949 Hieronymus
D163,736 S 6/1951 Bangert, Jr.
2,828,413 A 3/1958 Bowers et al.

2,853,585 A 9/1958 Danziger et al.
3,284,667 A 11/1966 Harris et al.
3,491,249 A 1/1970 Rabinow
3,579,030 A 5/1971 Bentham et al.
3,689,886 A 9/1972 Durkee
3,697,821 A 10/1972 Johnson
3,706,914 A 12/1972 Van Buren
3,707,682 A 12/1972 Harris
3,736,591 A 5/1973 Rennels et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2 245 671 9/2003

(Continued)

OTHER PUBLICATIONS

ADEMCO, "No. 5827BD Wireless Bidirectional Console used with
5800TH Transmitter Module Installation Instructions and Operating
Guide," Aug. 1993.

(Continued)



Primary Examiner—Tuyet Vo

(74) *Attorney, Agent, or Firm*—McCarter & English, LLP

(57) **ABSTRACT**

A system for commissioning ballasts comprising a wireless
device that can be easily transported to any location served
by an addressable lighting system. The wireless device
allows a user to cycle through a list of uncommissioned
ballasts and send a command to a control system to flash the
lights connected to each of the ballasts on the list one by one.
When a light is observed to flash by the user, the user of the
wireless device may then commission the correct ballast
with the wireless device. In addition, the user may assign the
ballast to a group. In this way, the commissioning of ballasts
in, for example, a building is greatly facilitated.

7 Claims, 3 Drawing Sheets

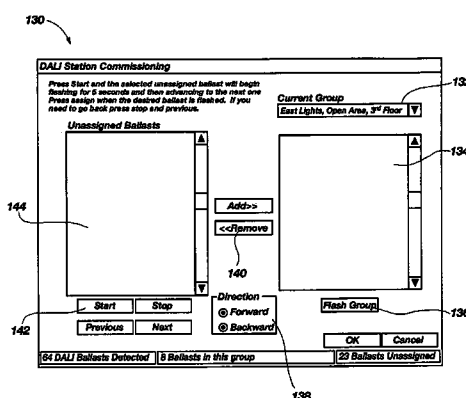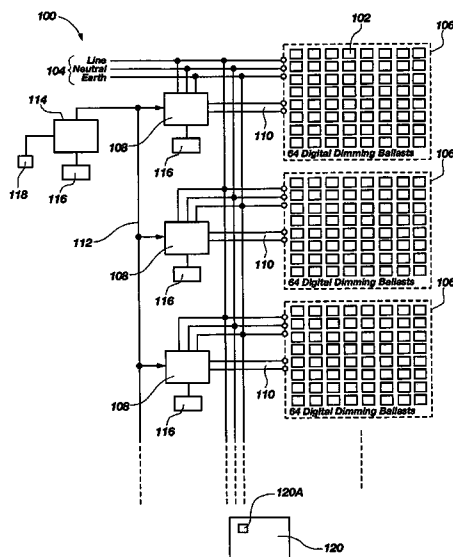

U.S. PATENT DOCUMENTS					
3,746,923 A	7/1973	Spira et al.	4,582,967 A	4/1986	Brumit et al.
3,763,394 A	10/1973	Blanchard	4,590,614 A	5/1986	Erat
3,784,875 A	1/1974	Baker et al.	D285,066 S	8/1986	Liss et al.
3,867,596 A	2/1975	Schadow	4,611,198 A	9/1986	Levinson et al.
3,868,546 A	2/1975	Gilbreath et al.	4,628,440 A	12/1986	Thompson
3,868,547 A	2/1975	Kappenhagen et al.	4,631,377 A	12/1986	Imazeki et al.
3,885,116 A	5/1975	Kodaira	4,635,040 A	1/1987	Masot
3,918,062 A	11/1975	Haruki et al.	4,638,299 A	1/1987	Campbell
3,940,660 A	2/1976	Edwards	4,644,320 A	2/1987	Carr et al.
3,980,954 A	9/1976	Whyte	4,680,536 A	7/1987	Roszel et al.
3,986,423 A	10/1976	Rossum	4,684,822 A	8/1987	Angott
3,996,441 A	12/1976	Ohashi	4,689,547 A	8/1987	Rowen et al.
4,016,561 A	4/1977	Parker et al.	4,691,341 A	9/1987	Knoble et al.
4,057,751 A	11/1977	Bonsignore et al.	4,695,820 A	9/1987	D'Aleo et al.
4,060,735 A	11/1977	Pascucci et al.	4,697,227 A	9/1987	Callahan
4,095,139 A	6/1978	Symonds et al.	4,703,306 A	10/1987	Barritt
D249,141 S	8/1978	Mayo	4,714,983 A	12/1987	Lang
4,123,756 A	10/1978	Nagata et al.	4,716,409 A	12/1987	Hart et al.
4,131,777 A	12/1978	Bailey et al.	4,719,446 A	1/1988	Hart
4,156,866 A	5/1979	Miller	4,727,296 A	2/1988	Zaharchuk et al.
4,163,218 A	7/1979	Wu	4,728,949 A	3/1988	Platte et al.
4,169,972 A	10/1979	Black, III et al.	4,737,769 A	4/1988	Masot
4,185,531 A	1/1980	Oberheim et al.	4,745,351 A	5/1988	Rowen et al.
4,187,528 A	2/1980	Morriss	4,749,917 A	6/1988	Angott et al.
4,194,099 A	3/1980	Mickelson	4,751,385 A	6/1988	Van Benthussysen et al.
4,196,388 A	4/1980	Weller et al.	4,755,792 A	7/1988	Pezzolo et al.
4,200,862 A	4/1980	Campbell et al.	4,764,981 A	8/1988	Miyahara et al.
4,203,096 A	5/1980	Farley et al.	4,772,824 A	9/1988	Gulledge
4,206,443 A	6/1980	Britton	4,772,825 A	9/1988	Tabor et al.
4,225,808 A	9/1980	Saraceni	4,783,581 A	11/1988	Flowers et al.
4,246,494 A	1/1981	Foreman et al.	4,792,731 A	12/1988	Pearlman et al.
4,253,048 A	2/1981	Osako	4,797,599 A	1/1989	Ference et al.
4,259,619 A	3/1981	Wall	4,814,776 A	3/1989	Caci et al.
4,262,180 A	4/1981	Walter	4,823,069 A	4/1989	Callahan et al.
4,274,045 A	6/1981	Goldstein	4,825,209 A	4/1989	Sasaki et al.
4,277,727 A	7/1981	LeVert	4,843,386 A	6/1989	Wolf
4,300,090 A	11/1981	Weber	4,864,588 A	9/1989	Simpson et al.
4,303,811 A	12/1981	Parkinson	4,876,552 A	10/1989	Zakman
4,334,171 A	6/1982	Parman et al.	4,878,010 A	10/1989	Weber
4,336,464 A	6/1982	Weber	4,880,950 A	11/1989	Carson et al.
4,338,595 A	7/1982	Newman	4,889,999 A	12/1989	Rowen
4,339,632 A	7/1982	Early et al.	4,893,062 A	1/1990	D'Aleo et al.
4,359,670 A	11/1982	Hosaka et al.	4,908,806 A	3/1990	Nickolaus
4,381,456 A	4/1983	Saito et al.	4,918,432 A	4/1990	Pauley et al.
4,388,567 A	6/1983	Yamazaki et al.	4,918,717 A	4/1990	Bissonnette et al.
4,390,814 A	6/1983	Peek	4,924,109 A	5/1990	Weber
4,392,187 A	7/1983	Bornhorst	4,924,151 A	5/1990	D'Aleo et al.
4,395,660 A	7/1983	Waszkiewicz	4,940,903 A	7/1990	Brown, Jr. et al.
4,418,333 A	11/1983	Schwarzbach et al.	4,948,987 A	8/1990	Weber
4,421,966 A	12/1983	Pounds	D310,349 S	9/1990	Rowen
4,436,972 A	3/1984	Scanlon	4,955,084 A	9/1990	Umetsu et al.
4,437,169 A	3/1984	Bertenshaw et al.	D311,382 S	10/1990	Mayo et al.
4,455,546 A	6/1984	Roszel	D311,485 S	10/1990	Jacoby et al.
4,463,287 A	7/1984	Pitel	D311,678 S	10/1990	Graef et al.
4,468,542 A	8/1984	Pounds	4,980,806 A	12/1990	Taylor et al.
4,471,493 A	9/1984	Schober	D313,738 S	1/1991	Mayo et al.
4,484,190 A	11/1984	Bedard	4,995,053 A	2/1991	Simpson et al.
4,485,374 A	11/1984	Meserow et al.	5,003,318 A	3/1991	Berneking et al.
4,489,385 A	12/1984	Miller et al.	5,012,225 A	4/1991	Gill
4,491,843 A	1/1985	Boubouleix	5,017,837 A	5/1991	Hanna et al.
4,504,778 A	3/1985	Evans	5,027,106 A	6/1991	Lizzi et al.
4,521,843 A	6/1985	Pezzolo et al.	5,028,853 A	7/1991	Brown, Jr. et al.
4,523,132 A	6/1985	Christiansen et al.	5,030,893 A	7/1991	Spira et al.
4,524,288 A	6/1985	Schimmelpennink et al.	5,034,602 A	7/1991	Garcia, Jr. et al.
4,527,198 A	7/1985	Callahan	D319,429 S	8/1991	D'Aleo et al.
4,532,395 A	7/1985	Zukowski	5,041,825 A	8/1991	Hart et al.
4,540,917 A	9/1985	Luchaco et al.	5,051,720 A	9/1991	Kittirutsunetorn
4,550,276 A	10/1985	Callahan et al.	5,059,871 A	10/1991	Pearlman et al.
4,560,909 A	12/1985	Peil	5,079,559 A	1/1992	Umetsu et al.
4,563,592 A	1/1986	Yuhasz et al.	5,086,385 A	2/1992	Launey et al.
4,575,660 A	3/1986	Zaharchuk et al.	5,099,193 A	3/1992	Moseley et al.
			5,103,209 A	4/1992	Lizzi et al.
			5,109,222 A	4/1992	Welty

US 7,307,542 B1

Page 3

5,113,498 A	5/1992	Evan et al.	6,092,903 A	7/2000	Higgins, Jr.	
D327,255 S	6/1992	D'Aleo et al.	6,100,659 A	8/2000	Will et al.	
5,128,855 A	7/1992	Hilber et al.	6,140,987 A	10/2000	Stein et al.	
5,146,153 A	9/1992	Luchaco et al.	6,169,256 B1	1/2001	Hanahara et al.	
5,175,477 A	12/1992	Grissom	6,180,895 B1	1/2001	Hutchinson et al.	
5,187,655 A	2/1993	Post et al.	6,184,481 B1	2/2001	Chen	
5,189,412 A	2/1993	Mehta et al.	6,192,282 B1	2/2001	Smith et al.	
5,191,265 A	3/1993	D'Aleo et al.	6,199,136 B1	3/2001	Shteyn	
5,209,560 A	5/1993	Taylor et al.	6,201,364 B1	3/2001	Will et al.	
5,225,765 A	7/1993	Callahan et al.	6,207,913 B1	3/2001	Nakajima et al.	
5,237,264 A	8/1993	Moseley et al.	6,233,132 B1	5/2001	Jenski	
5,239,205 A	8/1993	Hoffman et al.	6,310,609 B1	10/2001	Morgenthaler	
5,247,293 A	9/1993	Nakagawa	6,331,687 B1	12/2001	Dunk et al.	
5,248,919 A	9/1993	Hanna et al.	6,355,890 B1	3/2002	Kuroda	
5,280,296 A	1/1994	Tan et al.	6,359,562 B2	3/2002	Rubin	
D344,264 S	2/1994	D'Aleo et al.	6,369,524 B1 *	4/2002	Sid	315/292
5,311,656 A	5/1994	Eldershaw	6,369,800 B1	4/2002	Nading et al.	
5,321,736 A	6/1994	Beasley	6,400,271 B1	6/2002	Davies, Jr. et al.	
5,327,426 A	7/1994	Dolin, Jr. et al.	D461,782 S	8/2002	Butler et al.	
5,340,954 A	8/1994	Hoffman et al.	6,453,687 B2	9/2002	Sharood et al.	
5,349,362 A	9/1994	Forbes et al.	6,467,924 B2	10/2002	Shipman	
5,357,170 A	10/1994	Luchaco et al.	6,493,874 B2	12/2002	Humpleman	
5,361,184 A	11/1994	El-Sharkawi et al.	6,510,995 B2	1/2003	Muthu et al.	
5,361,985 A	11/1994	Rein et al.	6,523,696 B1	2/2003	Saito et al.	
5,367,133 A	11/1994	Schmidt et al.	6,549,190 B1	4/2003	Windrem	
5,373,411 A	12/1994	Grass et al.	6,555,774 B1	4/2003	Nielsen	
5,382,947 A	1/1995	Thaler et al.	6,575,607 B1	6/2003	Klemish et al.	
5,399,940 A	3/1995	Hanna et al.	6,593,530 B2	7/2003	Hunt	
5,400,041 A	3/1995	Strickland	6,608,271 B2	8/2003	Duarte	
5,400,246 A	3/1995	Wilson et al.	6,618,764 B1	9/2003	Shteyn	
5,401,927 A	3/1995	Lundell et al.	6,640,141 B2	10/2003	Bennett	
5,430,356 A	7/1995	Ference et al.	6,646,843 B1	11/2003	Newman, Jr. et al.	
5,436,510 A	7/1995	Gilbert	6,674,248 B2	1/2004	Newman, Jr. et al.	
5,452,291 A	9/1995	Eisenhandler et al.	6,680,730 B1	1/2004	Shields et al.	
5,455,464 A	10/1995	Gosling	6,753,661 B2	6/2004	Muthu et al.	
5,455,761 A	10/1995	Kushiro et al.	6,774,328 B2	8/2004	Adams et al.	
5,463,286 A	10/1995	D'Aleo et al.	6,797,902 B2	9/2004	Farage et al.	
5,467,264 A	11/1995	Rauch et al.	6,882,111 B2	4/2005	Kan et al.	
5,473,202 A	12/1995	Mudge et al.	6,909,424 B2	6/2005	Llebenow et al.	
5,481,750 A	1/1996	Parise et al.	6,931,364 B1	8/2005	Anturna	
5,490,144 A	2/1996	Tran et al.	6,950,087 B2	9/2005	Knox et al.	
5,495,406 A	2/1996	Kushiro et al.	6,965,848 B2	11/2005	Ballus	
5,523,631 A	6/1996	Fishman et al.	6,967,448 B2 *	11/2005	Morgan et al.	315/295
5,555,150 A	9/1996	Newman, Jr.	6,967,565 B2	11/2005	Lingemann	
5,563,459 A	10/1996	Kurosawa et al.	7,130,774 B2	10/2006	Thomas et al.	
5,565,855 A	10/1996	Knibbe	2001/0000422 A1 *	4/2001	Sid	315/293
5,565,865 A	10/1996	So	2001/0047250 A1	11/2001	Schuller et al.	
5,574,431 A	11/1996	McKeown et al.	2001/0047251 A1	11/2001	Kemp	
5,588,760 A	12/1996	So	2001/0055003 A1	12/2001	Chi et al.	
5,598,322 A	1/1997	Von Arx et al.	2002/0016639 A1	2/2002	Smith et al.	
5,637,930 A	6/1997	Rowen et al.	2002/0026533 A1	2/2002	Dutta et al.	
5,638,296 A	6/1997	Johnson et al.	2002/0037004 A1	3/2002	Bossemeyer et al.	
5,640,141 A	6/1997	Myllymäki	2003/0009315 A1	1/2003	Thomas et al.	
4,095,139 A	7/1997	Symonds et al.	2003/0012035 A1	1/2003	Bernard	
5,657,005 A	8/1997	Seebeck et al.	2003/0052770 A1	3/2003	Mansfield, Jr. et al.	
5,668,358 A	9/1997	Wolf et al.	2003/0056012 A1	3/2003	Modeste et al.	
5,711,588 A	1/1998	Rudisill	2003/0129969 A1	7/2003	Rucinski	
5,726,644 A	3/1998	Jednacz et al.	2003/0227894 A1	12/2003	Wang et al.	
5,736,965 A	4/1998	Mosebrook et al.	2003/0233429 A1	12/2003	Matte et al.	
5,748,828 A	5/1998	Steiner et al.	2004/0024624 A1	2/2004	Ciscon et al.	
5,796,382 A	8/1998	Beeteson	2004/0037288 A1	2/2004	Bourgart et al.	
5,801,345 A	9/1998	Mikula-Curtis et al.	2004/0038683 A1	2/2004	Rappaport et al.	
5,861,809 A	1/1999	Eckstein et al.	2004/0054747 A1	3/2004	Breh et al.	
5,905,442 A	5/1999	Mosebrook et al.	2004/0088082 A1	5/2004	Ahmed	
5,912,443 A	6/1999	Hasunuma	2004/0113945 A1	6/2004	Park et al.	
5,960,942 A	10/1999	Thornton	2004/0143428 A1	7/2004	Rappaport et al.	
5,962,109 A	10/1999	Schwietz	2004/0225811 A1 *	11/2004	Fosler	710/305
5,975,711 A	11/1999	Parker et al.	2004/0267385 A1	12/2004	Lingemann	
5,977,901 A	11/1999	Fenner				
5,982,103 A	11/1999	Mosebrook et al.				
6,032,202 A	2/2000	Lea et al.				
6,080,940 A	6/2000	Rice				
6,091,205 A	7/2000	Newman, Jr. et al.				
			FOREIGN PATENT DOCUMENTS			
			DE	30 08 339 A1	9/1981	
			DE	30 12 840 A1	10/1981	

DE	32 21 873 A1	1/1984
DE	32 24 997 A1	1/1984
DE	219 637 A1	3/1985
DE	43 08 161 A1	9/1994
DE	103-06-080 A1	8/2004
EP	0 022 516	1/1981
EP	0 040 339	11/1981
EP	0 054 582	6/1982
EP	0 196 347	10/1986
EP	0 293 569	12/1988
EP	0 327 128	8/1989
EP	0 346 614	12/1989
EP	0 357 136	3/1990
EP	0 361 734	4/1990
EP	0 435 224	7/1991
EP	0 466 152	1/1992
EP	0 513 443	11/1992
EP	0 552 769	7/1993
EP	0 555 869	8/1993
EP	0 558 349	9/1993
EP	0 616 451	9/1994
EP	0 626 635	11/1994
EP	0 687 078	12/1995
FR	2 701 115	9/1994
GB	1090891	11/1967
GB	1 215 009	12/1970
GB	2 076 180	11/1981
GB	2 097 918	11/1982
GB	2 099 222	12/1982
GB	2 166 328	4/1986
WO	WO-86/06890	11/1986
WO	WO-90/08418	7/1990
WO	WO-93/13507	7/1993
WO	WO-95/32595	11/1995
WO	WO-97/29560	8/1997

OTHER PUBLICATIONS

ADEMCO, "No. 5827BD Wireless Bidirectional Console Installation and Setup Guide," Feb. 2004.

Advanced Control Technologies, Inc., "Innovative and Quality Solutions to Control Problems!" www.act-solutions.com, at least as early as Aug. 23, 2005.

Advanced Control Technologies, Inc., "Introducing the Next Generation of Home Control Systems HomePro RF," Mar. 17, 2006.

Air Conditioning Heating & Refrigeration News, "The search for standard automation protocols narrows," Air Conditioning Heating & Refrigeration News, vol. 191, No. 5, p. 9, Jan. 1994.

Anonymous, "Echelon releases LONWORKS control network protocol, opening up huge potential," Sensor Review, vol. 16, No. 4, p. 9, 1996.

Anonymous, "New products offer high-speed transmission in control networks," Sensor Review, vol. 13, No. 4, p. 39, 1993.

Appliance Manufacturer, "1 Million Nodes," Appliance Manufacturer, vol. 44, No. 1, p. 16, Jan. 1996.

Ballerini et al., "AISI Research and MPR Ltd. to Develop and Market Home Automation Products for Telecommunications Industry," Business Wire, Sec. 1, p. 1, Jun. 2, 1989.

Berger, "Plug-In Remote Controls For The Whole House," Home Mechanix, vol. 88, No. 762, pp. 26-29, 76, Feb. 1992.

Bertsch, "Development Tools for Home Automation," IEEE Transactions on Consumer Electronics, vol. 36, No. 4, pp. 854-858, Nov. 1990.

Beuth Verlag GmbH, "DIN 19 245 Teil 1: Profibus," DIN Deutsches Institute für Normung E.V., Apr. 1991.

Boughton, "Hard-Wired Home: Automated systems can control everything from lights to curling irons to hot tubs—all at the push of a button," The San Francisco Chronicle, p. Z1, Aug. 30, 1995.

Buffkin, "CEBus, LonWorks heading from 'HomeLAN,'" Electronic Engineering Times, vol. 847, p. 58, May 8, 1995.

Bushby, "The BACnet communication protocol for building automation Systems," Ashrae Journal, pp. 14-21, Apr. 1991.

Business Week, "Getting all your appliances on the same wavelength," Business Week, vol. 3088, p. 92E, Jan. 23, 1989.

Butler, "Personal Technology at Home with Technology: LonWorks may run home of the future," The Atlanta Journal the Atlanta Constitution, p. P6, Nov. 19, 1995.

Butler, "Wireless Light Switch Flexible, Easy to Install," The Columbus Dispatch, p. 10H, Oct. 23, 1993.

Butler, "Add-On Light Switches Eliminate Wiring Hassles," Roanoke Times & World News, p. 3, Jun. 6, 1995.

Bybee, "Build Reacts: The Radio-Electronics Advanced Control System," Radio-Electronics, vol. 59, No. 10, p. 65, Oct. 1988.

Caristi, "Carrier-current remote control," Electronics Now, vol. 66, No. 6, p. 49, Jun. 1, 1995.

Carlin, "On the bus," Sound & Image, vol. 4, No. 3, p. 20, Fall, 1994.

www.cbushop.com, "What's new in CBus Shop™?" www.cbushop.com, at least as early as Jun. 18, 2004.

www.cbushop.com, "U105RHH001BPW1: Handheld Remote Unit—Pearl White," www.cbushop.com, at least as early as Jun. 18, 2004.

Coffey, "CEBus," email, at least as early as Jul. 2004.

COMPUTE! "Open the pod bay door," Compute!, vol. 14, No. 11, p. 44, Dec. 1992.

Cooper, "X10 FAQ html version. Based on the X10 FAQ version 1.08," Jan. 8, 1995.

Crevier, "Scott Crevier's X-10 Web Interface," at least as early as Nov. 11, 2002.

Cross et al., "A Fiber Optic Home Automation System," IEEE Transactions on Consumer Electronics, vol. 39, No. 3, pp. 636-645, Aug. 1993.

Davidson, "Echelon's Local Operating Network," Circuit Cellar Ink, pp. 74-77, Jun./Jul. 1991.

Davidson, "Take a Tour of the Bright Home," The Computer Applications Journal, vol. 25, pp. 14-21, Feb./Mar. 1992.

Davidson, "CEBus: A New Standard in Home Automation," Circuit Cellar Ink, pp. 40-52, Aug./Sep. 1989.

Davidson, "CEBus Update," Circuit Cellar Ink, pp. S2-S10, Building Automation Special.

Davidson, "CEBus Gets Physical," Circuit Cellar Ink, pp. 103-104, Feb./Mar. 1991.

Davidson, "CEBus Update: More Physical Details Available," Circuit Cellar Ink, pp. 66-72, Jun./Jul. 1991.

Davidson, "CEBus Goes Coax," The Computer Applications Journal, vol. 25, pp. 108-110, Feb./Mar. 1992.

Davidson, "Habitech 94," The Computer Applications Journal, vol. 47, pp. 46-51, Jun. 1994.

Davis, "Zigbee Aims at Home, Utility Markets," www.reed-electronics.com/electronicnews/article/CA469135%20, Oct. 7, 2004.

Delaney, "The CEBus perspective," Appliance Manufacturer, vol. 41, No. 5, p. 31, May 1993.

DiChristina et al., "Controlling the Home," Popular Science, vol. 240, No. 5, p. 48, May 1992.

DiLouie, "Automated Controls Can Save Energy," Facilities Design & Management, vol. 14, No. 11, p. 35, Nov. 1995.

Douligeris et al., "The Consumer Electronic Bus Symbol Encoding Sublayer: A Twisted Pair Implementation," IEEE, pp. 385-388, 1992.

Douligeris, "Intelligent Home Systems: Low-cost computers and fiber optics make it possible to implement systems that can integrate data, voice, and visual communications inside the home," IEEE Communications Magazine, pp. 52-61, Oct. 1993.

Douligeris et al., "Communications and Control for a Home Automation System," IEEE, pp. 171-175, 1991.

Driscoll, "A Timeline for Home Automation," www.eddriscoll.com, 2002.

Edden, "Modelling CEBus Home Automation with Knowledge Based Tools," IEEE, pp. 623-627, 1990.

Electronic Engineering Times, "LONworks gets interface boards," Electronic Engineering Times, p. 54, Jul. 3, 1995.

Electronic Industries Association, EIA-600 (Sections 600.10, 600.31, 600.32, 600.33, 600.35, 600.37, 600.38, 600.41, 600.42, 600.81, and 600.82). Feb. 1995.

- Electronic News, "New CEBus devices target energy management," Electronic News, vol. 40, No. 2006, p. 48, Mar. 21, 1994.
- Electronic News, "Intellon-IBM CEBus deal eyes energy/com system," Electronic News, vol. 41, No. 2063, p. 24, May 1, 1995.
- Electronic News, "Intellon spins home automation roadmap," Electronic News, vol. 41, No. 2064, p. 46, May 8, 1995.
- Electronics Australia, "WA firm wins US automation award," Electronics Australia, vol. 57, No. 1, p. 123, Jan. 1995.
- Evans, "Solving Home Automation Problems Using Artificial Intelligence Techniques," IEEE, pp. 395-400, 1991.
- Evans, "CAL: Part of the Solution," Home Automation & Building Control, pp. 59-67, Jul. 1995.
- Evans, The CEBus Standard User's Guide: A Complete Technical Overview, The Training Department Publications, 1996.
- Fisher, "Switch-On CEBus: A CAL Interpreter," The Computer Applications Journal, vol. 31, pp. 24-30, Feb. 1993.
- FUTURIST, "Home automation," Futurist, vol. 28, No. 5, p. 7, Sep./Oct. 1994.
- GE, Appendix A, GE Authentication and Encryption Algorithm. Version II. Nov. 1995.
- Gfeller et al., "Wireless In-House Data Communication via Diffuse Infrared Radiation," Proceedings of the IEEE, vol. 61, No. 11, pp. 1474-1486, Nov. 1979.
- Gikas, "Total Home Control Home Control from Your Car," Home Mechanix, vol. 91, No. 794, p. 24, Apr. 1995.
- Gilmore, "The integrated automated educated house," Popular Science, vol. 236, No. 6, p. 104, Jun. 1990.
- Gilmore, "The World's Smartest Houses," Popular Science, vol. 237, No. 3, pp. 56-65, Sep. 1990.
- Gilmore et al., "Open (automated) house," Popular Science, vol. 237, No. 4, p. 48, Oct. 1990.
- www.globalsuccessinc.com, "Home Automation: GSI Home Automation Controller—The Next Generation in Home Automation!" www.globalsuccessinc.com, 2003.
- Gorzelay, "Hot new electronics," J. Consumers Digest, vol. 28, No. 3, p. 74, May/Jun. 1989.
- Home Controls, Inc., Home Automation and Networking Catalog, No. 52, Fall 2005.
- Homepro, "ZTH100 Radio Frequency Wireless Controller," 2001.
- www.homeseer.com, "Z-Wave Information," www.homeseer.com, at least as early as Jun. 21, 2004.
- www.homeseer.com, "Z-Wave Lamp Module (HomePro)," www.homeseer.com, at least as early as Jun. 21, 2004.
- www.homeseer.com, "Z-Wave Remote Control (ivory)," www.homeseer.com, at least as early as Jun. 21, 2004.
- HOUSE, "CEBus for the Masses," Home Automation & Building Control, pp. 61-68, Apr. 1995.
- Hunt et al., "Are We There Yet?: CEBus Ready to Bring 'Home of the Future' into the Present," Chicago Tribune, p. 22, Mar. 1, 1996.
- Intellon Corporation, "Intellon HomePlug7 Family of Products," 2005.
- Intellon Corporation, "SSC P485 PL Transceiver IC," at least as early as Jul. 3, 2006.
- Interim Standard. IS-60.04 Node Communications Protocol, Part 6: Application Layer Specification. Apr. 1996.
- Iversen, "A New Push Begins to Sell a Home Bus," Electronics, vol. 61, No. 12, p. 40, Jun. 1988.
- IW, "Building Blocks for Home Automation," IW, p. 23, May 15, 1995.
- Jancsurak, "Smart receptacle for smart plugs," Electronic Industries Association, vol. 41, No. 4, p. 62, Apr. 1993.
- Karpinski, "In-home networks draw industry attention," Interactive Age, vol. 2, No. 6, p. 39, Jan. 16, 1995.
- Keefe, Jr., "Power Line Modem for Home Control," Electronics Now, p. 65, Mar. 1994.
- Khawand et al., "Common Application Language (CAL) and Its Integration into a Home Automation System," IEEE, pp. 157-162, 1991.
- Kingery, "Which One Should I Use?" at least as early as Jun. 30, 2006.
- Kingery, "Which One Should I Use, Part XII (Preamble)," at least as early as Jun. 30, 2006.
- Kingery, "'Digital X-10' Which One Should I Use, Part XIII (Preamble)," at least as early as Jun. 30, 2006.
- Kingery, "'Two Way and Extended Code' Which One Should I Use, Part XIV (Preamble)," at least as early as Jun. 30, 2006.
- Kingery, "Which One Should I Use #17, What is 'Extended Code'? (and does it wear a tuxedo?) Part 1—"Different Ways of Counting," at least as early as Jun. 30, 2006.
- Kingery, "Which One Should I Use #18. What is 'Extended Code'? Part 2—"Big Indians and Little Indians," at least as early as Jun. 30, 2006.
- Kirschner, "Smarts at last?" Popular Science, vol. 247, No. 1, p. 38, Jul. 1995.
- Kleiman, "MacDaniel's Advice: Introduction to the X10 System," Sep. 24, 2001.
- Krause, "Echelon-CEBus rivalry tangles decoder specs," Electronic News, vol. 41, No. 2067, p. 1, May 29, 1995.
- Krause, "EIA sees potential CEBus role in U.S. NII Proposal," Electronic News, vol. 40, No. 2021, p. 38, Jul. 4, 1994.
- Kung, "Perceived requirements concerning home automation," Trialog, pp. 1-5, Dec. 1995.
- Lamson & Sessions, Product Installation Instructions, 2004.
- Langreth, "Slow going for smart homes," Popular Science, vol. 242, No. 2, p. 60, Feb. 1993.
- Leeb, "A User Interface for Home-Net," IEEE, pp. 897-902, 1994.
- Lutron Electronics Co., Inc., "Homeworks7 seeTouch J Ordering Guide," 2003.
- Lutron Electronics Co., Inc., "Homeworks7 Interactive Vario7-Style Local Lighting Controls," 1998.
- Lutron Electronics Co., Inc., Residential Lighting Controls Catalog, at least as early as Jun. 28, 2006.
- Lutron Electronics Co., Inc., "RadioRA7 Wireless Home Lighting Control RA-IR, RB-IR Setup and Installation Guide Addendum for RadioRA7 Infrared Interface," 2001.
- Lutron Electronics Co., Inc., "RadioRA7 Wireless Home Lighting Control RAMC-MFE, RBMC-MFE Setup and Installation for a RadioRA7 Multi-Function Entry Master Control," 2001.
- Lutron Electronics Co., Inc., "RadioRA7 Wireless Home Lighting Control Installation Instructions for Visor Control Transmitter," 2001.
- Markwalter et al., "Design Influences for the CEBus Automation Protocol," IEEE, pp. 145-153, 1991.
- McGrath, "Seizing the future," Electronic Perspectives, vol. 14, No. 6, p. 14, Nov./Dec. 1990.
- McLeister, "Builders in Subdivisions, Scattered Sites Gain Edge with Home Automation," Professional Builder, pp. 82-83, Feb. 1995.
- McLeister, "Dramatic Changes Lie Ahead For Home Automation," Professional Builder, p. 101, Feb. 1994.
- Meth, "Where Will Smart Homes Get Their Smarts?" Electronic Design, vol. 43, No. 19, pp. 61-64, Sep. 18, 1995.
- Munro, "Automating the Home," Washington Technology, p. 1, Nov. 9, 1995.
- Murray, "Wired and ready," Popular Science, vol. 247, No. 2, p. 36, Aug. 1995.
- Nisley, "Two-Way Power Line Communication," The Computer Applications Journal, vol. 25, pp. 74-81, Feb./Mar. 1992.
- Pacelle, "Automation Is Knocking at U.S. Homes—TVs Can Talk to Thermostats, but Cost Keeps Most Doors From Opening," Asian Wall Street Journal, p. 7, Sep. 29, 1992.
- Palenchar, "Z-Wave Takes on Home-Automation Market," www.twice.com, Mar. 22, 2004.
- Pargh, "High-tech functions improve new light switches," Chicago Sun-Times, p. 7, Oct. 7, 1990.
- Parks, "The State of Home Systems," The Computer Applications Journal, vol. 25, pp. 12-13, Feb./Mar. 1992.
- Parks Associates, Home Systems 94: Home Controls, Parks Associates, Dallas, 1994.
- Parks et al., X-10 Ltd. Myths and Reality: The Facts Behind the Company and the Technology, Parks Associates, Dallas, 1994.
- Phillips, "Installing a Home Alarm: Protect your property and enjoy extra conveniences with an affordable do-it-yourself system," Home Mechanix, vol. 90, No. 782, p. 60, Feb. 1994.

- Price, "Product Development Flow Using Domosys HeadStart Suite," www.hometoys.com/hnews/aug99/articles/domosys/domosys.htm, Aug. 1999.
- PR Newswire, "Cyberhouse Software Wins Mark of Excellence Award from Home Automation Association," PR Newswire, p. 325, Mar. 25, 1996.
- Professional Builder, "From start to finish: Molex's SMART HOUSE home automation system means quality," Professional Builder, vol. 59, No. 10, p. 18, Oct. 1994.
- Professional Builder, "Home automation networks links public utility," Professional Builder, vol. 59, No. 7, p. 64, Jul. 1994.
- Professional Builder, "Home automation & electronics," Professional Builder, vol. 60, No. 2, p. 350, Mid-Jan. 1995.
- Professional Builder, "Exclusive survey results: Home buyers & the intelligent house," Professional Builder, vol. 60, No. 19, p. 13, Dec. 1995.
- Rabbie, title unknown, 1992.
- Radio-Electronics, "CEBus Developments," Radio-Electronics, vol. 62, No. 8, p. 4, Aug. 1991.
- Remlich, Jr., "Intelligent gas appliances," Appliance Manufacturer, vol. 41, No. 3, p. 63, Mar. 1993.
- RF LOCKER, "RF Locker," at least as early as Jul. 2004.
- Rochfort, "Sensory experience," Custom Builder, vol. 9, No. 5, p. S-28, Sep./Oct. 1994.
- Ruling, "The Wybron Autopilot," TCI, vol. 29, No. 4, p. 54, Apr. 1995.
- Schade, "Convenient Remote-Control Light Switching Saves Energy," Energy & Automation, vol. 9, No. 1, pp. 37-39, Jan./Feb. 1987.
- Schade, "Switching of Lighting Installations by Remote Control," Elektrische Energie-Technik, vol. 29, No. 2, p. 18, Jun./Jul. 1984.
- Schade, "New Aspects in the Horizontal Power Supply of Lighting Installations," Siemens Power Engineering, vol. 6, No. 4, pp. 238-239, Jul./Aug. 1984.
- Schofield, "Home Automation Takes Off: Intellon products support a 'home electronic highway,'" Design News, pp. 84-87, Apr. 10, 1995.
- www.shed.com, "x-10 is both a Company and the Technology that it developed," www.shed.com/x10.html, at least as early as Jun. 30, 2006.
- www.smarthomepro.com, "Introducing Digital Wireless Lighting and Appliance Control," www.smarthomepro.com, at least as early as Jun. 21, 2004.
- www.smarthomeusa.com, "Z-Wave Radio Frequency Wireless Controllor," www.smarthomeusa.com, at least as early as Jun. 19, 2004.
- www.smarthome.com, "Sophisticated Lighting Control for Your Home," www.smarthome.com, at least as early as Jun. 18, 2004.
- www.smarthome.com, "Getting Started," www.smarthome.com, at least as early as Jun. 21, 2004.
- www.smarthome.com, "A Full-Featured Dimmer for Every Home!" www.smarthome.com, at least as early as Jun. 21, 2004.
- www.smarthome.com, "What is X10?" www.smarthome.com, at least as early as Jun. 21, 2004.
- www.smarthome.com, "Automatically Turn On X10 Lights When You Enter the Room!" www.smarthome.com, at least as early as Jun. 18, 2004.
- www.smarthome.com, "Control Lights and Appliances from the Comfort of Your Sofa!" www.smarthome.com, at least as early as Jun. 21, 2004.
- Stauffer, "The Smart House System," The Computer Applications Journal, vol. 31, pp. 14-23, Feb. 1993.
- Strassberg, "Home Automation Buses: Protocols really hit home," EDN, pp. 69-80, Apr. 13, 1995.
- Taber, "The Arrival of a World Without Wires," Business for Central New Jersey, vol. 2, No. 3, Section 1, p. 3, Feb. 13, 1989.
- Tanenbaum, Computer Networks, Prentice-Hall, Inc., Englewood Cliffs, New Jersey, pp. 144, 271-275, 1989.
- TCI, "Lighting control (Buyers Guide)," TCI, vol. 28, No. 10, p. 56, Dec. 1, 1994.
- Texas Instruments, Chipcon Products from Texas Instruments, 2006.
- Teyssier, "BatiBUS: BatiBUS System Design Principles," Jun. 1990.
- Uhara et al., "Development of HI (Home Information) Control System," Sharp Technical Journal, vol. 59, pp. 39-42, Aug. 1994.
- www.unitiesystemshomemanager.com, "Lighting & Appliance Control," www.unitiesystemshomemanager.com, at least as early as Jun. 23, 2004.
- Unknown, "What is X10?" unknown, at least as early as Jul. 18, 2006.
- Unknown, "X-10 Technology Transmission Theory," unknown, at least as early as Jul. 18, 2006.
- Wacks, "The Impact of Home Automation on Power Electronics," IEEE, pp. 3-9, 1993.
- Williams, "Brightening Up The House: Latest Technology, Marketing Developments Bring Sophisticated Home Automation Closer to the Masses," Chicago Tribune, p. 1, Mar. 3, 1996.
- Winick, "The RF Medium in the Home—The Move to Spread Spectrum," IEEE Transactions on Consumer Electronics, vol. 37, No. 2, pp. 108-115, May 1991.
- "Wireless hookups offered through radio technology," UCLA.
- www.x10.com, "Let There Be Light," www.x10.com/news/articles/0309_light.htm, at least as early as Jul. 18, 2006.
- www.x10.com, "SuperRemote Home Control Kit," www.x10.com, at least as early as Jun. 18, 2004.
- www.x10.com, "X10 Powerline Carrier (PLC) Technology," www.x10.com/support/technology1.htm, at least as early as Jun. 30, 2006.
- X10PRO, "X10 Platform Basics," at least as early as Jun. 30, 2006.
- Yoshida, "LONWorks connects," Electronic Engineering Times, vol. 769, p. 16, Oct. 25, 1993.
- Zhonglei, et al., "Simultaneous Control Signal and Power Transmission Through Mechanical Rotary Joint Without Wiring Connection," IEEE, pp. 1589-1593, 1996.
- Horowitz et al., The Art of Electronics, 1989, Cambridge University Press, 2nd Ed., pp. 595-598.

* cited by examiner

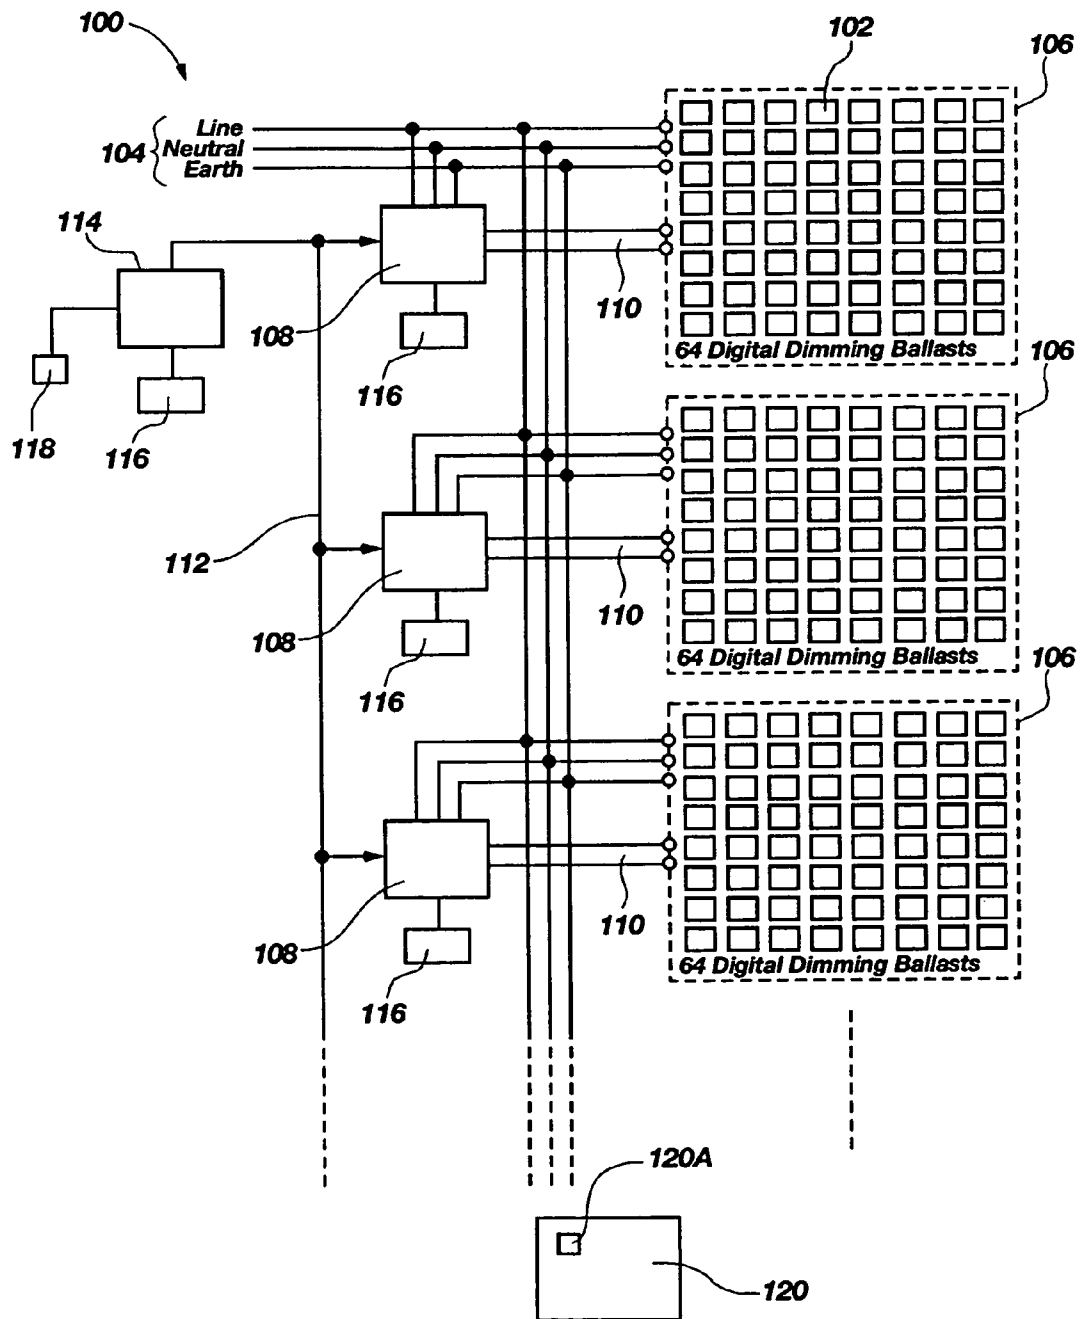


FIG. 1


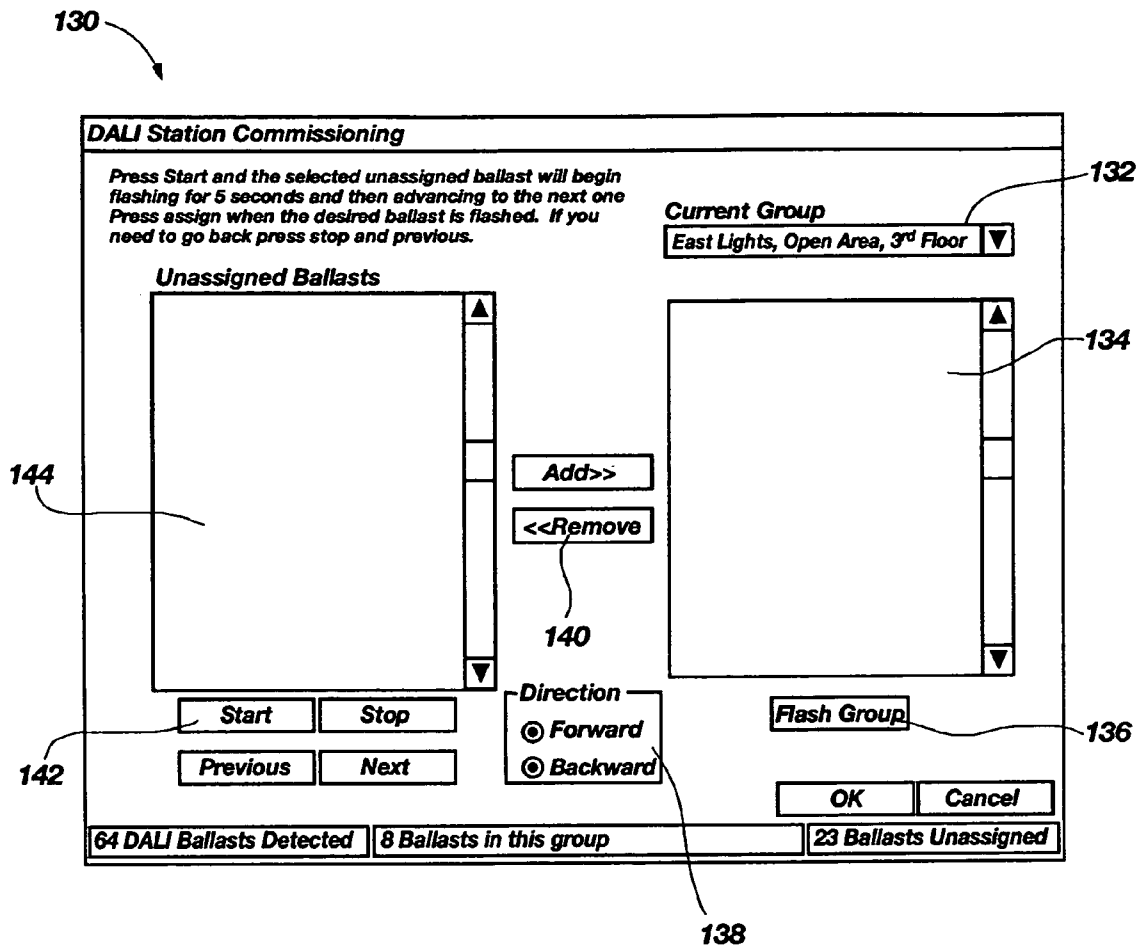


FIG. 2

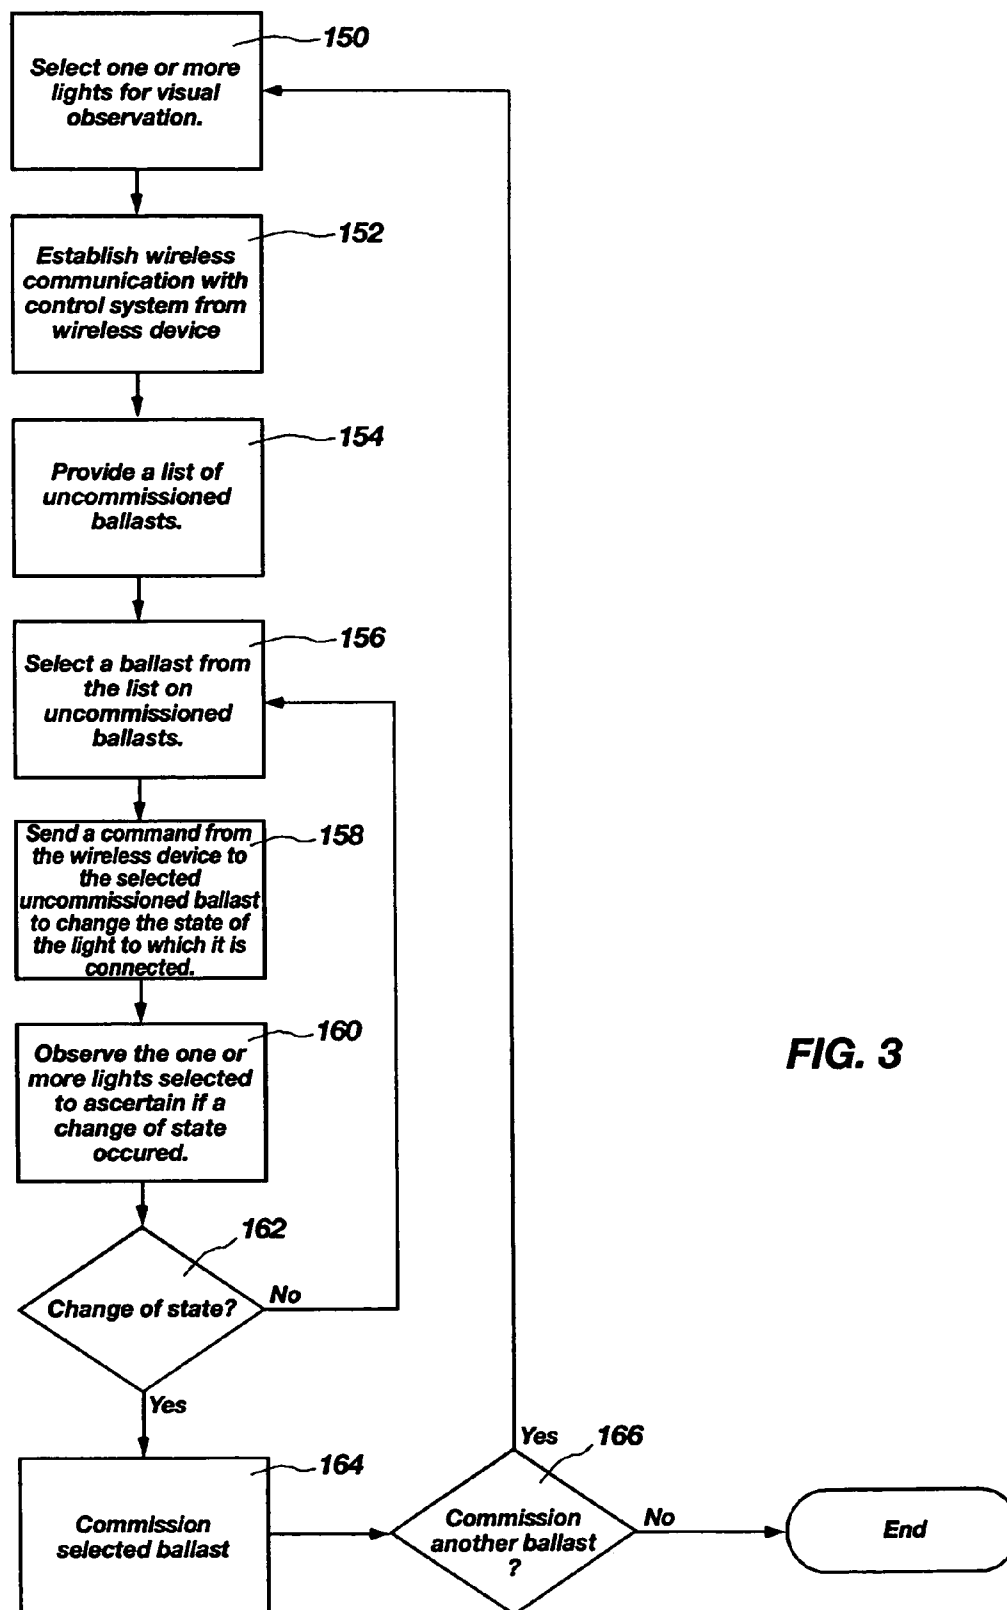

1

SYSTEM AND METHOD FOR COMMISSIONING ADDRESSABLE LIGHTING SYSTEMS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of U.S. Provisional Application No. 60/500,193, filed Sep. 3, 2003, which is hereby incorporated by reference herein in its entirety, including but not limited to those portions that specifically appear hereinafter, the incorporation by reference being made with the following exception: In the event that any portion of the above-referenced provisional application is inconsistent with this application, this application supercedes said above-referenced provisional application.

STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable.

BACKGROUND OF THE INVENTION

1. The Field of the Invention

The present invention relates generally to systems and methods for commissioning, and more particularly, but not necessarily entirely, to systems and methods for commissioning addressable lighting systems.

2. Background Art

Technology for lighting systems has substantially increased in complexity and capability over the past decade. Traditionally, lights simply provided illumination via simple wiring of light switches and dimmers. More recently, additional functionality has been incorporated into lighting systems to provide additional features and, more importantly, to provide energy conservation. For example, it might be desirable to dim or turn off certain lights to set certain scenes depending on the specific conditions, such as the day of the week, time of day, or even season of the year. In addition, it might be desirable to dim or turn off unnecessary lights, even dim or extinguish only selected lights in a room, to conserve energy.

Digitally addressable lighting is slowly emerging as a popular means for controlling complete lighting environments for a wide variety of different applications. Individual control of each lamp enables the end user to precisely deliver the correct amount of light when and where it is required. Managing the light in this manner potentially allows for a massive reduction in global energy consumption due to lighting. Industrial environments can conserve the total energy required for lighting while actually increasing light quality in certain areas at given times by using modern lighting control systems.

A complete digital dimming system includes the dimming ballasts, in the case of lamps which require a ballast, and a digital control unit for converting information received from a network connection to the communication protocol required by the micro-controller in each ballast. Applications for such systems include building management or studio lighting where it is desired to control a single lamp, or groups of lamps, for conserving energy, performing lamp maintenance or creating precision lighting effects.

Digital dimming ballasts typically include an EMI filter, rectifier, power factor correction, and ballast output stage. The digital ballast also includes a micro-controller for sending and receiving information digitally. The micro-

2

controller functions include storing the ballast address, receiving user instructions, setting the dim reference for the ballast control, receiving status information from the ballast control and sending status information back to the user. The digital ballast potentially allows for complete and precise control of an entire lighting environment.

In the past, the analog 1-10V control interface was the most common industry standard for controlling ballasts. However, the 1-10V control interface has been shown to be inflexible and is slowly being replaced by a new standard known as the Digital Addressable Lighting Interface-protocol or DALI-protocol or just DALI.

DALI is an international standard that has been described in IEC 60929 which establishes the electronic ballast performance requirement. DALI has been designed in a joint effort by many control equipment manufacturers. DALI is advantageous because of its simple wiring control lines and because it allows control over single units (for example, lamps). In addition, the status of each unit may be queried and ascertained.

DALI is currently designed for a maximum of sixty-four single units having individual addresses, a maximum of sixteen groups, and a maximum of sixteen scenes. The "intelligence" has been decentralized to the ballasts, i.e., the values of many set points and lighting values are stored within the individual ballasts. All functions are carried out locally.

Each ballast connected to a DALI controlled system has its own address. An address stands for the definite designation of a unit within a DALI-system. This way each ballast can be contacted individually, although it is connected to a DALI system-line like all the other units. The address assignment, for example, must be effected when the system is put into operation. All units of a system can be contacted at the same time by way of a broadcast.

A differentiation is made between individual addresses and group addresses. Sixty-four individual addresses exist in the DALI-system. Thus, one or several control units can contact individually, i.e. a maximum of sixty-four ballasts. Each ballast may also be part of a maximum of sixteen groups. The plurality of control units can be part of a larger network. In theory, the number of individual ballasts on a network may be unlimited. The DALI control bus comprises two-wires. Any wiring topology can be used, such a line, star or mixed.

One drawback to using the DALI system occurs during the commissioning process. As used herein, the commissioning process entails identifying the physical location of each ballast and its respective address or ID. Typically, all ballasts have an associated address stored by the manufacturer during production. When the DALI system is first activated, each ballast registers with a control unit its respective address. It will be appreciated that the physical location of each ballast may not be known, because there may be up to sixty-four ballasts connected to the control unit. The ballasts may be spread across different rooms, floors or even buildings. In addition, where multiple control units are being used, it may not even be possible to tell which ballasts are controlled by which control units.

In the past, there have been primarily two methods used to commission a DALI system. The first method has been to keep track of the physical location where each ballast is installed in a structure and record its location and the corresponding ballast address. This method has severe drawbacks. First, this method requires that the addresses be printed on the outside of the ballast. Some manufacturers of ballasts may not do this. Secondly, in large scale operations,

this may be overly cumbersome and error prone. Next, often the electricians installing the ballasts are not the same individuals who will be initiating the DALI system requiring a high level of cooperation. Finally, the biggest drawback is that even if the addresses and locations are correctly recorded during installation, the DALI system has a randomizing feature that reassigns addresses randomly to each ballast thereby, if such a randomizing feature is purposefully or inadvertently invoked, negating any recorded information.

The second method entails first initiating the DALI system thereby allowing each ballast to register its address with the control unit. Then, a person physically disconnects each lamp, typically by climbing a ladder to reach the lamp, controlled by the system one by one. The control unit will indicate which address has a disconnected lamp. In this manner, the physical location associated with each address can be ascertained. It will be appreciated that in large scale operations, physically disconnecting and reconnecting each lamp one by one is cumbersome and time consuming.

Despite the advantages of known DALI systems, improvements are still being sought. For example, the current known methods of commissioning has significant drawbacks in that it is overly cumbersome and time consuming.

The available methods and devices are thus characterized by several disadvantages that are addressed by the present invention. The present invention minimizes, and in some aspects eliminates, the above-mentioned failures, and other problems, by utilizing the methods and structural features described herein.

The features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by the practice of the invention without undue experimentation. The features and advantages of the invention may be realized and obtained by means of the structures and combinations particularly pointed out in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the invention will become apparent from a consideration of the subsequent detailed description presented in connection with the accompanying drawings in which:

FIG. 1 is a diagram of an exemplary embodiment of the present invention.

FIG. 2 is a representation of one exemplary interface displayed on a wireless device.

FIG. 3 is a flow chart illustrating the steps to carry out one illustrative embodiment of the present invention.

DETAILED DESCRIPTION OF THE ILLUSTRATIVE EMBODIMENTS

For the purposes of promoting an understanding of the principles in accordance with the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended. Any alterations and further modifications of the inventive features illustrated herein, and any additional applications of the principles of the invention as illustrated herein, which would normally occur to one skilled in the relevant art and having possession of this disclosure, are to be considered within the scope of the invention claimed.

It must be noted that, as used in this specification and the appended claims, the singular forms "a," "an," and "the" include plural referents unless the context clearly dictates otherwise. In describing and claiming the present invention, the following terminology will be used in accordance with the definitions set out below.

As used herein, "comprising," "including," "containing," "characterized by," and grammatical equivalents thereof are inclusive or open-ended terms that do not exclude additional, unrecited elements or method steps.

The DALI Manual (copyright 2001) published by the Digital Addressable Lighting Interface Activity Group aka DALI AG, and available on the internet at www.dali-ag.org, is hereby incorporated by reference in its entirety herein. Moreover, the references discussed herein are provided solely for their disclosure prior to the filing date of the present application. Nothing herein is to be construed as a suggestion or admission that the inventors are not entitled to antedate such disclosure by virtue of prior invention.

Referring now to FIG. 1, there is generally shown one example of a DALI system 100. Each ballast 102 is connected to a power supply 104 and a control unit 108 through a two-wire bus 110 (individual connections not shown). Each control unit 108 is also connected to the power supply 104. Three subsystems 106, each comprising sixty-four ballasts, one of which is designated 102, the maximum allowed under current DALI standards, are also represented. Each subsystem 106 may be controlled by a single control unit 108.

Each control unit 108 may be further connected to a network 112. A control system 114 may also be connected to the network 112. The network 112 may enable two-way communication between the control system 114 and each control unit 108. It will be appreciated that each control unit 108 is also in two-way communication with each ballast 102 via the two-wire bus 110. In this manner, the control system 114 may have two-way communication with each individual ballast 102. In addition, any number of additional subsystems 106 and control units 108 may be added to the network 112.

Each control unit 108 may receive control signals over the network 112 from the control system 114 which in turn may control an individual ballast 102. The network 112 may comprise any type of network 112 including, without limitation, Ethernet, LAN, and internet. The network 112 may also be a bus, such as a two-wire bus, or even wireless using RF transmissions. In addition, each control unit 108 may receive control signals from devices 116, such as keypads, timers, remote control using IR or RF, or sensors, or any other type of similar device. It should also be noted that the control system 114 may also receive control signals from devices 116 connected to the control system 114 to control any of the ballasts 102.

Various brands of control units 108 are available on the market, all of which can be used in conjunction with the principles of the present invention.

The control system 114 may comprise any system used to control lighting with automation, including large scale building automation systems, commercial automation systems and even home automation systems. The control system 114 may include applications running on any computer, such as PC, or on proprietary hardware. Examples of a control system 114 are the C-Box controller and the Master Controller manufactured by Vantage, Inc. of Orem, Utah. Other brands of control systems are available on the market or may become available on the market, all of which can be utilized within the scope of the present invention.

5

A control system 114 may have a dedicated terminal for user input and/or showing “live” information about the system 100. A control system 114 may be connected temporarily to a computer or display, such as a PC or laptop computer, to accept user input.

A control system 114 further comprises a structure for communicating on the network 112. The type of structure is determined by the network 112. If the network 112 is wireless, for example, then the control system 114 may comprise an antenna for communicating on the network 112.

As explained above in the background section, when a DALI system is first initiated, i.e. turned on for the first time, each of the ballasts 102 may register its electronic address with the control unit 108 and/or control system 114. The electronic address may have been assigned by the manufacturer during production. If no address has been assigned, each individual ballast 102 may generate a random address. Sixty-four individual addresses exist in a DALI-system. In addition, the control system 114 may send a command for each ballast 102 to randomly select a new address even if the ballast 102 already has an address.

It will be appreciated that the addresses allow the control unit 108 and control system 114 to conduct two-way communication with a ballast 102. Signals are broadcasted widely in each subsystem 106. A ballast 102 will only process a signal containing its own individual address.

Once the system 100 has been initiated for the first time, it may be possible to ascertain the number of ballasts 102 connected to the system 100 and even view a listing of the addresses of the ballasts 102 connected to the system 100. However, it may not be possible to identify the address of a ballast 102 in a particular physical location. It is often necessary to assign a name to a ballast 102 or a group of ballasts 102 for easy recognition. The name should identify the location of the ballast 102 for future reference.

A group of ballasts 102 may all be controlled simultaneously using a single command signal. A group may have its own unique address. A plurality of groups may be formed from any subsystem 106. The current DALI protocol allows the formation of up to sixteen groups.

For example, a ballast 102 controlling a lamp in a supply room might be named “supply room.” If the supply room contained more than one ballast 102, each ballast 102 in the supply room may be assigned to a group named “supply room.” Further, each individual ballast 102 could be further identified with an individual name further specifying its location, such as “supply room, left corner.”

It should be noted that the use of names is arbitrary, and that any symbol or other identifier used to group ballasts together is sufficient.

The present invention provides a wireless device 120, for assisting with the commissioning process. The wireless device 120 is capable of interfacing with the control system 114 through an antenna 118 connected either directly or indirectly to the control system 114. The wireless device 120 may also comprise an antenna 120A for communicating with the control system 114. The wireless device 120 and the control system 114 may communicate using RF transmissions. In addition, if the control system 114 is already connected to the network 112 which has a wireless component, then the wireless device 120 can communicate with the control system 114 through the network 112.

The wireless device 120 should be portable such that the wireless device 120 can be transported easily around an area of interest, most often a structure or structures, in which the system 100 is installed. The wireless device 120 may be a laptop or other portable computing device capable of wire-

6

less communications. Running on the wireless device 120 is an application for interfacing with the control system 114. The application may have a graphical user interface for facilitating communication with the control system 114.

In particular, the wireless device 120 should allow a user to assign individual ballasts 102 to a group. The wireless device may further allow each ballast 102 and/or group to be assigned a name. The wireless device 120 may also allow a user to determine which ballasts 102 are currently assigned to a group and which ballasts 102 are currently unassigned to a group. The wireless device 120 may allow all of the ballasts 102 in a group to be identified.

In addition, the wireless device 120 may also send a command through the control system 114 directing a particular ballast 102, including uncommissioned ballasts 102, to change the current state of the lamp which it controls. For example, the command may instruct the ballast 102 to blink or flash the lamp which it controls. The command may also instruct the ballast 102 to cycle the lamp to which it is attached from a dim setting to a bright setting. Any change of state that can be observed by a person will suffice for the purposes of this invention.

It will be appreciated that with this capability, that a person can transport the wireless device 120 throughout a structure in which the system 100 is installed, such as a commercial building, to commission each of the ballasts 102. In one illustrative example of the present invention, the wireless device 120 is transported to a location in the structure to where it is believed that there may be one or more uncommissioned ballasts 102. A user may then instruct the system 114 through the wireless device 120 to alter the state of one of the lamps connected to an uncommissioned ballast 102.

During this time, the user monitors the lamps in his or her general area. If no change is observed, the user may continue to cycle through all of the uncommissioned ballasts 102 repeating the same process. If a change is observed in the state of one of the lamps while a particular uncommissioned ballast 102 has been commanded to change state, then the user may then commission that ballast since its location is now known. This process may be repeated until all of the uncommissioned ballasts 102 for a system 100 are commissioned.

It should be noted that the wireless device 120 may be programmed to cycle through all of the uncommissioned ballasts 102 automatically for a specified period of time. For example, by pressing a key or clicking on a button on a display of the wireless device 120, the uncommissioned ballasts 102 may begin flashing for a period of five seconds and then advance to the next uncommissioned ballast 102. When an observed lamp flashes, the user may hit another key or click a button to stop the process. In addition, the user may optionally be able to move incrementally forward or backwards through a list of uncommissioned ballasts 102.

The wireless device 120 may also be capable of sending a command to vary the states of all the lamps of all of the ballasts assigned to a particular group simultaneously. It will be appreciated that this will allow it to easily be determined that all the desired ballasts are in the group. For example, if it is desired that all of the lamps in a particular room or area be in the same group, by flashing all of the lamps in the group and observing the results it can easily be determined if the group is complete.

FIG. 2 illustrates one exemplary graphical user interface 130 that can be displayed on the wireless device 120 to assist in the commissioning process as contemplated by the present invention. A box 132 showing the current group may

be displayed. A box **134** showing the ballasts assigned to the group may be displayed. A button **136** for flashing all of the lights connected to the ballasts listed in box **134** may also be present. When button **136** is selected, all of the lights connected to the ballasts listed in box **134** will flash for a preset length of time. Box **138** allows the direction for cycling through the list of uncommissioned ballasts, box **144**. Buttons **140** allow uncommissioned ballasts listed in box **144** to be assigned to a group. Buttons **144** allow for controlling an automated cycling sequence through the uncommissioned ballasts listed in box **144**.

It will be appreciated that the present invention significantly reduces the time and the effort previously required during the commissioning process. The need to disconnect each lamp individually or keep track of electronic addresses and locations during the installation process is eliminated.

It should be further noted that the present invention is applicable to any protocol/system having addressable lighting. The present invention is not limited to the DALI protocol or the limitations set therein.

In accordance with the features and combinations described above, a useful illustrative method of commissioning one or more ballasts is illustrated in FIG. **3**. The steps comprise first selecting for visual observation one or more lights controlled by an addressable lighting system (step **150**). Next, a wireless device is used to establish a wireless connection with a control system (step **152**). The next step is to provide a list of uncommissioned ballasts and select a ballast from the list (steps **154** and **156**). The user then sends a command to the selected ballast to vary the state of the light to which it is attached (step **158**). The user then observes the lights selected in step **150** to ascertain if a corresponding change in state takes place (step **160**). If no change in state occurs, then another ballasts from the list is selected and the procedure is repeated (step **162**). If a change of state is observed, it means that the physical location of the light controlled by the ballast has been ascertained and the ballast may be commissioned (step **164**). These steps may be repeated until each uncommissioned ballast is commissioned (step **166**).

Those having ordinary skill in the relevant art will appreciate the advantages provided by the features of the present invention. For example, it is a feature of the present invention to provide a wireless device for commissioning ballasts by interfacing from remote locations with a control system.

It is to be understood that the above-described arrangements are only illustrative of the application of the principles

of the present invention. Numerous modifications and alternative arrangements may be devised by those skilled in the art without departing from the spirit and scope of the present invention and the appended claims are intended to cover such modifications and arrangements. Thus, while the present invention has been shown in the drawings and described above with particularity and detail, it will be apparent to those of ordinary skill in the art that numerous modifications, including, but not limited to, variations in size, materials, shape, form, function and manner of operation, assembly and use may be made without departing from the principles and concepts set forth herein.

What is claimed is:

1. A system for commissioning a plurality of ballasts connected to an addressable lighting system in an area of interest, each ballast controlling an on, off or intensity level of a light, said system comprising:

a control system, said control system connected to the addressable lighting system;

a wireless device, said wireless device capable of communicating with the control system via wireless transmissions throughout the area of interest;

means, at least partially provided on said wireless device, for allowing a user to vary the on, off or intensity level of the light controlled by any one of the plurality of ballasts from almost any location in the area of interest;

means, at least partially provided on said wireless device, for allowing the user to commission each ballast; and

means, at least partially provided on said wireless device, for allowing the user to assign a ballast to a group.

2. The system of claim **1** wherein the control system is an automation system and the area of interest comprises at least one structure.

3. The system of claim **1** wherein the wireless device is a laptop.

4. The system of claim **1** wherein the wireless transmissions comprise RF transmissions.

5. The system of claim **1** wherein the addressable lighting system comprises one or more control units.

6. The system of claim **5** wherein the control units communicate with each of the plurality of ballasts via the DALI protocol.

7. The system of claim **5** wherein the control system is connected to each of the one or more control units via a network.

* * * * *