



US008050777B2

(12) **United States Patent**
Hunt et al.

(10) **Patent No.:** **US 8,050,777 B2**
(45) **Date of Patent:** **Nov. 1, 2011**

- (54) **GOBO VIRTUAL MACHINE** 5,343,294 A * 8/1994 Kuchel et al. 356/604
- 5,414,328 A 5/1995 Hunt et al.
- (75) Inventors: **Mark A Hunt**, Birmingham (GB); **Drew Findley**, Sherman Oaks, CA (US) 5,812,596 A 9/1998 Hunt et al.
- 5,969,485 A 10/1999 Hunt
- 5,983,280 A 11/1999 Hunt
- (73) Assignee: **Production Resource Group, Inc.**, New Windsor, NY (US) 6,029,122 A 2/2000 Hunt
- 6,175,771 B1 1/2001 Hunt et al.
- 6,211,627 B1 * 4/2001 Callahan 315/294
- 6,256,136 B1 * 7/2001 Hunt 359/291
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 87 days. 6,431,711 B1 * 8/2002 Pinhanez 353/69
- 6,466,357 B2 * 10/2002 Hunt 359/291
- 6,530,662 B1 * 3/2003 Haseltine et al. 353/5
- 6,536,904 B2 * 3/2003 Kunzman 353/31

(Continued)

(21) Appl. No.: **12/276,035**

(22) Filed: **Nov. 21, 2008**

(65) **Prior Publication Data**

US 2009/0076627 A1 Mar. 19, 2009

Related U.S. Application Data

(63) Continuation of application No. 10/913,023, filed on Aug. 6, 2004, now Pat. No. 7,457,670.

(60) Provisional application No. 60/493,531, filed on Aug. 7, 2003.

(51) **Int. Cl.**

G05B 15/00 (2006.01)
G09G 5/00 (2006.01)

(52) **U.S. Cl.** 700/1; 345/1.3; 345/312

(58) **Field of Classification Search** 345/1.3, 345/312; 700/1

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

- 3,312,142 A * 4/1967 Shistovsky 434/286
- 3,596,379 A * 8/1971 Faulkner 434/286
- 4,468,688 A * 8/1984 Gabriel et al. 348/580
- 4,599,645 A * 7/1986 Brown et al. 348/123
- 4,681,415 A * 7/1987 Beer et al. 396/335
- 4,776,796 A * 10/1988 Nossal 434/94
- 4,972,305 A * 11/1990 Blackburn 362/234

OTHER PUBLICATIONS

Murtagh-T., "Digital Television Techniques and Interactive Video Applications in the Planetarium", Mar. 1989, Irish Astronomical Journal, vol. 19, No. 1, p. 17-21.*

(Continued)


Primary Examiner — Albert Decady
Assistant Examiner — Thomas Stevens

(74) *Attorney, Agent, or Firm* — Law Office of Scott C. Harris, Inc.

(57) **ABSTRACT**

Producing complicated effects based on image processing operations. The image processing operations are defined for a processor which may be different than the processor which is actually used. The processor that is actually used runs an interpreter that interprets the information into its own language, and then runs the image processing. The actual information is formed according to a plurality of layers which are combined in some way so that each layer can effect the layers below it. For example, the layers may add to, subtract from, or form transparency to the layer below it or make color filtering the layer below it. This enables many different effects computed and precompiled for a hypothetical processor, and a different processor can be used to combine and render those effects.

23 Claims, 4 Drawing Sheets

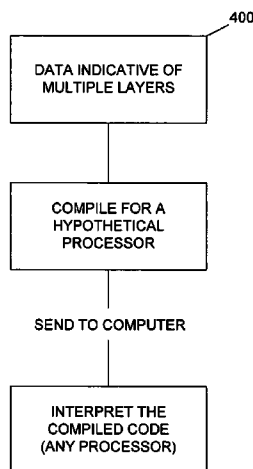

U.S. PATENT DOCUMENTS

6,549,326 B2 4/2003 Hunt et al.
 6,565,941 B1 5/2003 Hewlett
 6,751,239 B2 6/2004 Raman et al. 370/466
 6,831,617 B1* 12/2004 Miyauchi et al. 345/33
 7,139,617 B1* 11/2006 Morgan et al. 700/17
 7,228,190 B2* 6/2007 Dowling et al. 700/94
 7,242,152 B2* 7/2007 Dowling et al. 315/291
 7,290,895 B2* 11/2007 Hunt 362/85
 7,353,071 B2* 4/2008 Blackwell et al. 700/23
 7,358,929 B2* 4/2008 Mueller et al. 345/13
 7,390,092 B2* 6/2008 Belliveau 353/30
 2002/0005858 A1* 1/2002 Aoki 345/618
 2002/0038157 A1* 3/2002 Dowling et al. 700/90
 2002/0141732 A1* 10/2002 Reese et al. 386/46
 2003/0057887 A1* 3/2003 Dowling et al. 315/291
 2003/0076281 A1* 4/2003 Morgan et al. 345/44
 2003/0128210 A1* 7/2003 Muffler et al. 345/428
 2003/0214530 A1* 11/2003 Wang et al. 345/757
 2005/0057543 A1 3/2005 Hunt et al.

2005/0086589 A1 4/2005 Hunt
 2005/0094635 A1 5/2005 Hunt
 2005/0190985 A1 9/2005 Hunt
 2005/0200318 A1 9/2005 Hunt et al.
 2005/0275626 A1* 12/2005 Mueller et al. 345/156
 2006/0158461 A1 7/2006 Reese et al.
 2006/0187532 A1 8/2006 Hewlett et al.
 2006/0227297 A1 10/2006 Hunt
 2008/0140231 A1* 6/2008 Blackwell et al. 700/90

OTHER PUBLICATIONS

Carr-J., 'Lighting Up Storage' 2004 Network Magazine p. 72-74.
 Tobin et al., 'Accommodating Multiple Illumination Sources in a Imaging Colorimetry Environment' 2000 The International Society for Optical Engineering, p. 194-204.
 Schumacher et al., "(Apple Macintosh G4)" Jan. 2003 EMedia Magazine p. 36-40.

* cited by examiner

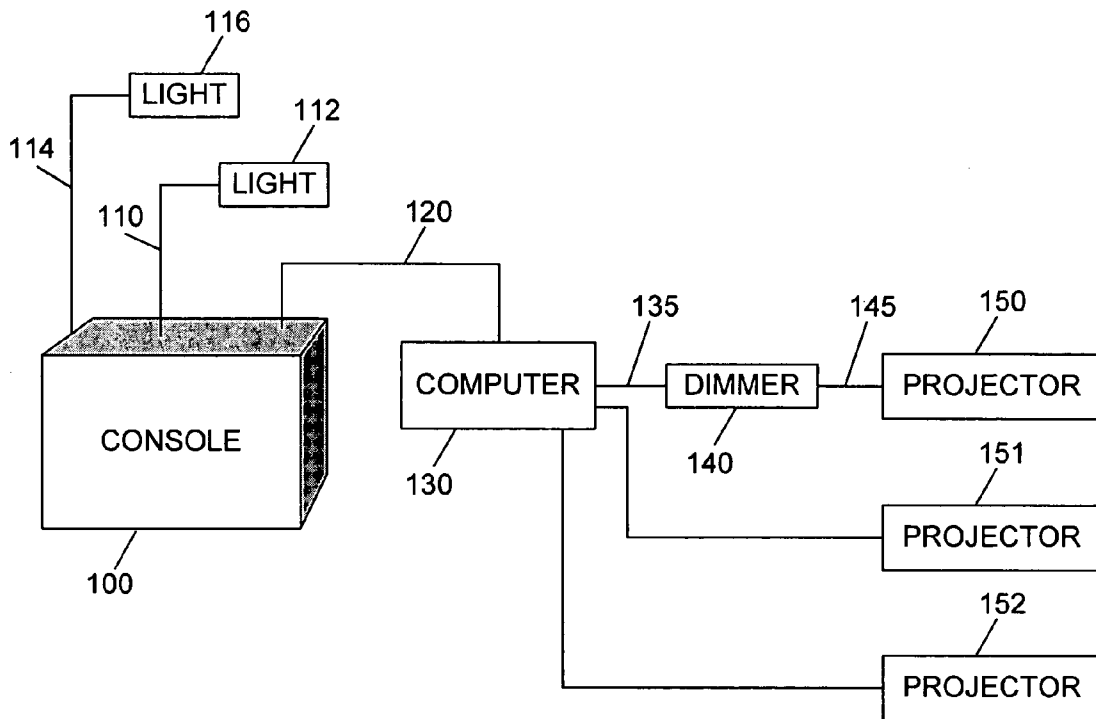


FIG. 1

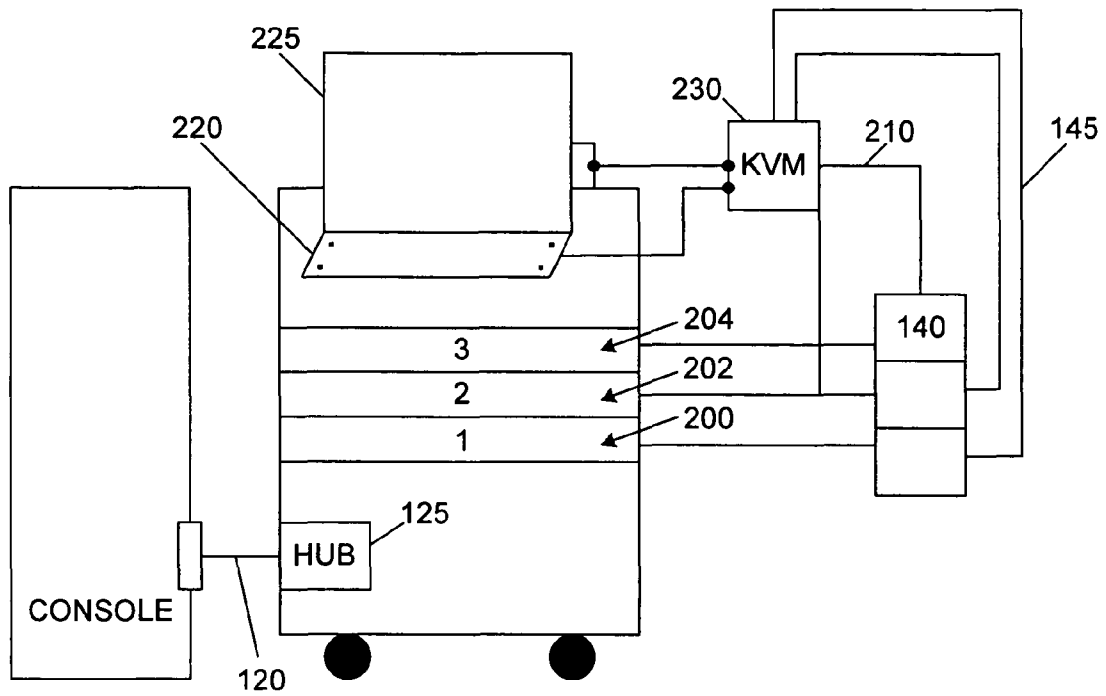


FIG. 2

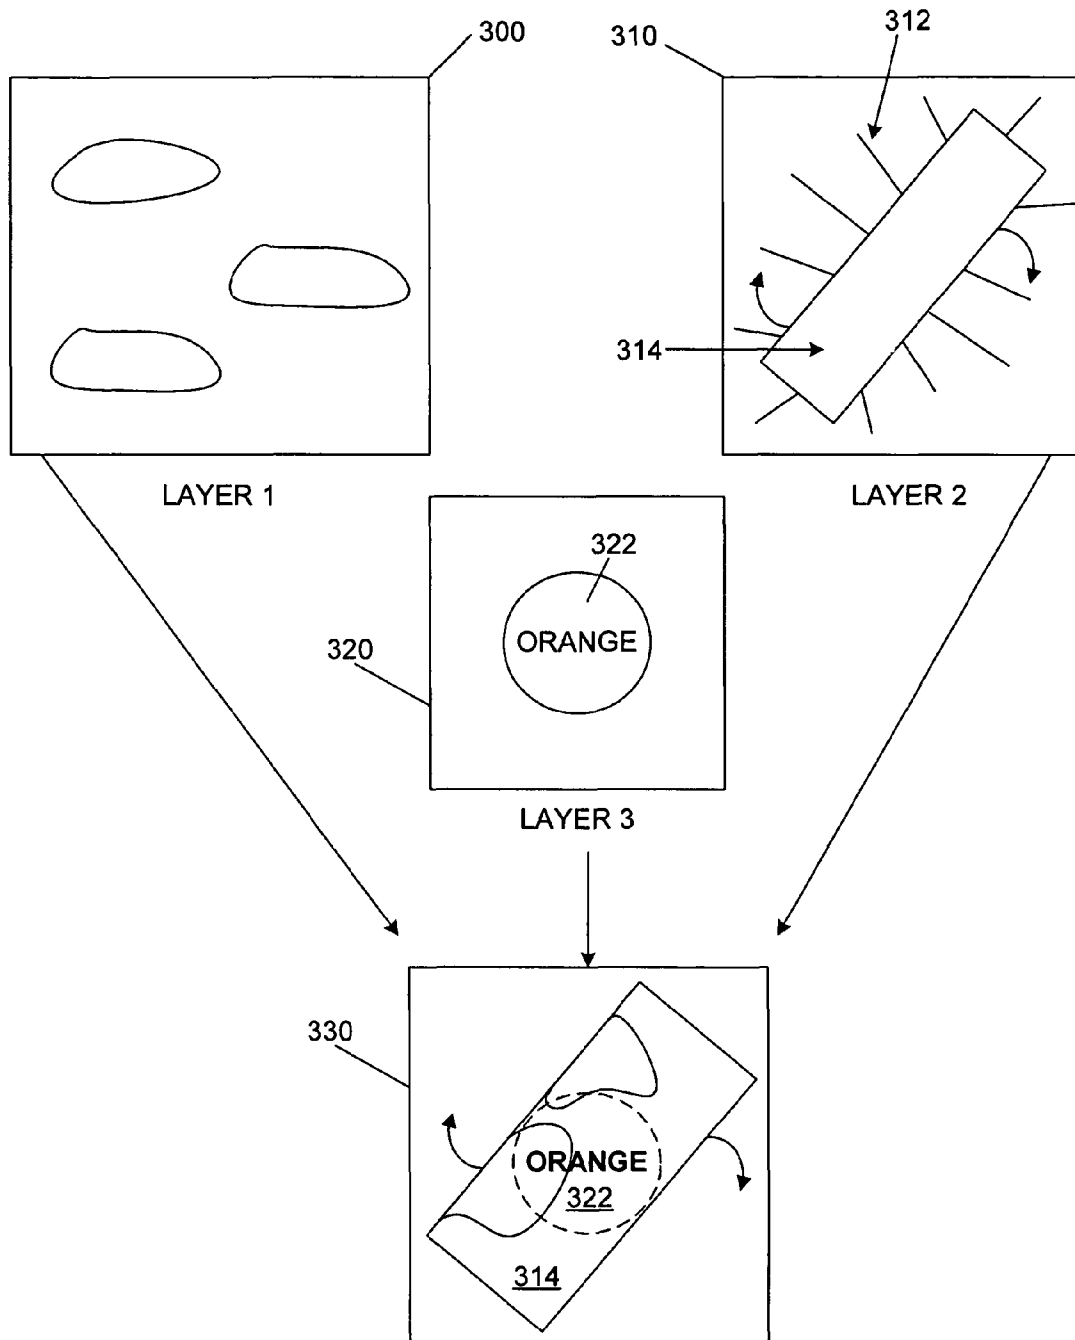


FIG. 3

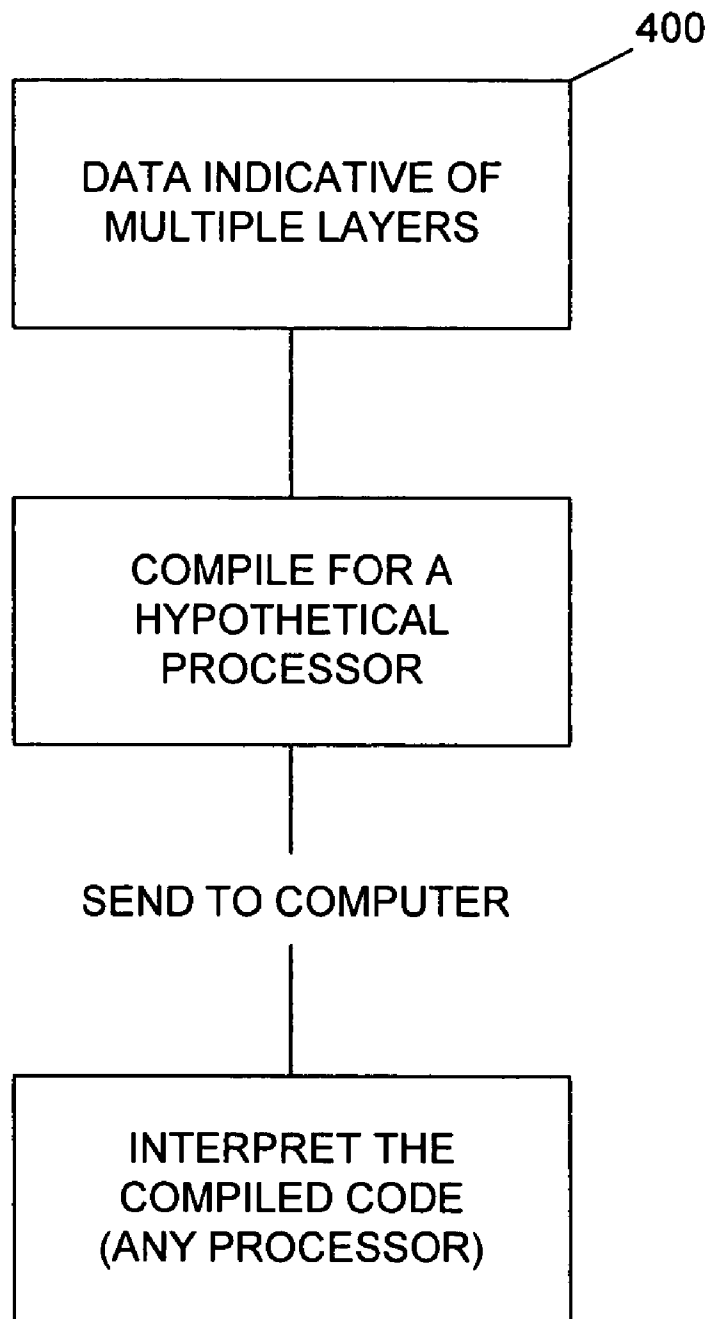


FIG. 4

GOBO VIRTUAL MACHINE

CROSS-REFERENCE TO RELATED APPLICATION

This application claims the benefit of prior U.S. Provisional Application Ser. No. 60/493,531, filed Aug. 7, 2003 and entitled "Gobo Virtual Machine."

BACKGROUND

Stage lighting effects have become increasingly complex, and are increasingly handled using more and more computing power. During a show, commands for various lights are often produced by a console which controls the overall show. The console has a number of encoders and controls which may be used to control any number of lights.

Complex effects may be controlled by the console. Typically each effect is individual for each light that is controlled.

SUMMARY

The present system teaches an apparatus in which a computer produces an output which is adapted for driving a projector according to commands produced by a console that controls multiple lights. The projector produces the light according to the commands entered on the console.

According to an aspect, certain commands are in a special generic form which enables them to be processed by many different computers.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects will now be described in detail with reference to the accompanying drawings, wherein:

FIG. 1 shows a block diagram of the overall system;

FIG. 2 shows a block diagram of the connection between the console and the box;

FIG. 3 shows a combination of multiple layers forming a final displayed image; and

FIG. 4 shows the way that the code can be compiled for a special kind of processor.

DETAILED DESCRIPTION

The output of the console 100 may be in various different formats, including DMX 512, or ethernet. The console 100 may be an ICON™ console. This console produces a number of outputs 110, 114 to respectively control a number of lighting units 112, 116. Console is shown producing output 110 to control light 112. Similarly, output 114 may be produced to control light 116.

Another output 120 may be produced to control a digital light shape altering device. Such a light may be the icon M, aspects of which are described, for example, in U.S. Pat. Nos. 6,549,326, 6,617,792, 6,736,528. In this embodiment, however, the output 120 which is intended for the light is actually sent to a computer 130 which runs software to form an image according to commands from the console. The computer 130 produces an output 135 which may be a standard video output. The video output 135 may be further processed according to a dimmer 140. The output of the dimmer is connected to a projector 150. The projector may be, for example, a projector using digital mirror devices or DMD's.

The projector produces output according to its conventional way of producing output. However, this is based on the control 120 which is produced by the console.

In the embodiment, the computer 130 may actually be a bank of multiple computers, which respectively produce multiple outputs for multiple projectors 150, 151, 152. FIG. 2 shows further detail about the connection between the console and the computer. The output of the console may be in any network format. In this embodiment, the output of the console may be in ethernet format, containing information that is directed to three different channels.

The computer 130 is actually a standalone half-height rack, on wheels, with three rack-mounted computers therein. The ethernet output 120 is coupled to an ethernet hub 125 which directs the output to each of the three computers. The three computers are shown as computer 1; designation 200, computer 2; designation 202, and computer 3; designation 204. Each of these computers may be standard computers having keyboard input and display outputs. The outputs of each of the computers are connected to the interface board 140.

Board 140 produces and outputs a first dimmed output 145 adapted for connection to the projector. The second, typically non-dimmed output 210 is connected to a three-way KVM switch. Each of the three computers have outputs which are coupled to the KVM switch. The KVM switch produces a single output representative of the selected computer output.

A single rack-mounted keyboard and monitor are located within the rack and driven by the KVM switch. The keyboard 220 is also connected to the KVM switch 230, and produces its output to the selected computer. For example, when computer 3 is selected, the KVM switch sends the output from keyboard 222 to computer 3 and the output from computer 3 is sent to display 225.

Any type of switch can be used, however standard KVM switches are typically available. Moreover, while this embodiment describes three different computers being used, there is practically no limit on the number of computers that can share input and output with a KVM switch.

The dimmer board may carry out dimming by multiplying each video output by analog values supplied by the associated computer. Moreover, the KVM switch is shown outside of the rack for simplicity, but in reality the KVM switch is rack-mounted within the rack.

As described above, the console produces a signal for each of many lights. That signal represents the desired effect. Different kinds of effects that can be produced may be described herein. The computer which actually does the image processing to form the desired result requested by the console. The computer processes the signal by receiving the command, converting that command into an image which forms a layer, and combining the multiple layers to form an overall image to be displayed by the projector/lamp.

The final image is formed by combining a plurality of layers. Each layer can have a number of different characteristics, but primarily, each layer may be considered to have a shape, a color, and/or an effect. The layers are combined such that each layer covers, adds to, subtracts, or allows transparency, to a layer below it.

An example of the operation is shown in FIG. 3. FIG. 3 shows a first layer 300 which is an animation of clouds. The animation is continuous, so that the user sees the effect of traveling through those clouds.

Layer 2 is overlaid on the layer one. Layer 2 is shown as 310, and corresponds to a rectangle which is rotating in a clockwise direction at a specified speed. In this layer, the perimeter area 312 is effectively black and opaque, while the interior area 314 is clear. Accordingly, as this layer is superimposed over the other layer, the area 314 allows the animation of layer 1 to show through, but the area 312 blocks the animation from showing through. The resultant image is

shown as **330**, with the rotating triangle **314** being transparent and showing portions of the cloud animation **300** through it. A third layer **320** is also shown, which simply includes an orange circle **322** in its center. In the resultant image **330**, the orange circle **322** forms an orange filter over the portion of the scene which is showing.

Each layer can have a number of different effects, besides the effects noted above. An incomplete list of effects is:

- color
- shape
- intensity
- timing
- rotation

Parameters associated with any of these effects can be specified. For example, parameters of rotation can be selected including the speed of rotation, the direction of rotation, and the center of rotation. One special effect is obtained by selecting a center of rotation that is actually off axis of the displayed scene. Other effects include scaling

Blocking (also called subtractive, allowing defining a hole and seeing through the hole).

Color filtering (changing the color of any layer or any part of any layer).

Decay (which is a trailing effect, in which as an image moves, images produced at previous times are not immediately erased, but rather fade away over time giving a trailing effect).

Timing of decay (effectively the time during which the effect is removed).

- A movie can also be produced and operations can include coloring the movie
- scaling the movie
- dimming of the image of the movie

Shake of the image, in which the image is moved up and down or back-and-forth in a specified shaking motion based on a random number. Since the motion is random, this gives the effect of a noisy shaking operation.

Wobble of the image, which is effectively a sinusoidal motion of the image in a specified direction. For wobble of the image, different parameters can be controlled, including speed of the wobble.

Forced redraw-this is a technique where at specified intervals, a command is given to produce an all-black screen. This forces the processor to redraw the entire image.

Other effects are also possible.

The computer may operate according to the flowchart of FIG. 4. The image itself is produced based on information that is received from the console, over the link **120**. Each console command is typically made up of a number of layers. At **400**, the data indicative of these multiple layers is formed.

Note that this system is extremely complex. This will require the computer to carry out multiple different kinds of highly computation-intensive operations. The operations may include, but are not limited to, playing of an animation, rotating an image, (which may consist of forming the image as a matrix arithmetic version of the image, and rotating the matrix), and other complicated image processes. In addition, however, all processors have different ways of rendering images.

In order to obtain better performance, the code for these systems has been highly individualized to a specified processor. For example, much of this operation was done on Apple processors, and the code was individualized to an Apple G4 processor. This can create difficulties, however, when new generations of processors become available. The developers are then given a choice between creating the code, and buying outdated equipment.

According to this system, the code which forms the layers is compiled for a specified real or hypothetical processor which does all of the operations that are necessary to carry out all of the image processing operations. Each processor, such as the processor **200**, effectively runs an interpreter which interprets the compiled code according to a prewritten routine. In an embodiment, a hypothetical processor may be an Apple G4 processor, and all processors are provided with a code decompilation tool which enables operating based on this compiled code. Notably, the processor has access to the open GL drawing environment which enables the processor to produce the image. However, in this way, any processor is capable of executing the code which is produced. This code may be compiled versions of any of the effects noted above.

Although only a few embodiments have been disclosed in detail above, other modifications are possible. All such modifications are intended to be encompassed within the following claims.

What is claimed is:

1. A computer system, comprising:

a first port, receiving information indicative of a light effect to be projected; an image producing device which produces an output based on said light effect, where said information includes multiple combined parts including at least one video part and at least one effect for said video part, wherein said image producing device produces a first output indicative of said information at a first brightness, and produces a second output indicative of a media to be viewed at a reduced brightness, wherein both said first output and said second output are indicative of all of said multiple combined parts are produced and are output simultaneously such that both first and second outputs show said at least one video part as modified by said effect for said video part, and where said effect modifies a look of said video part on both of said first and second outputs, wherein said image producing device produces both said first output, and also produces a dimming output indicative of an amount of dimming; and further comprising an analog multiplier that receives said dimming output, and multiplies said first output by said dimming output to produce said second output.

2. A computer system, comprising:

a first port, receiving information indicative of a light effect to be projected; an image producing device which produces an output based on said light effect, where said information includes multiple combined parts including at least one video part and at least one effect for said video part, wherein said image producing device produces a first output indicative of said information at a first brightness, and produces a second output indicative of a media to be viewed at a reduced brightness, wherein both said first output and said second output are indicative of all said multiple combined parts are produced and are output simultaneously such that both of said first and second outputs show said at least one video part as modified by said effect for said video part, and where said effects modifies a look of said video part on both of said first and second outputs, wherein said video part and said effect form multiple layers which is combined to produce both said first and second outputs.

3. A computer system as in claim 2, wherein one of said multiple layers subtracts from another layer to produce said first and second outputs.

4. A computer system as in claim 2, wherein one of said multiple layers provides transparency to another of said multiple layers to produce said first and second outputs.

5

5. A system as in claim 2, wherein one of said multiple layers is a continuous animation.

6. A system as in claim 2, wherein said image producing device produces a continuous animation as one of said multiple layers, and produces a shaped layer as another of said multiple layers, said shaped layer controlling an outer perimeter shape of said continuous animation.

7. A system as in claim 4, wherein said image producing device produces an output which has a shape that is based on one of said multiple layers.

8. A computer system, comprising:

a first port, receiving information indicative of a light effect to be projected; an image producing device which produces an output based on said light effect, where said information includes multiple combined parts including at least one video part and at least one effect for said video part, wherein said image producing device produces a first output indicative of said information at a first brightness, and produces a second output indicative of a media to be viewed at a reduced brightness, wherein both said first output and said second output are indicative of all of said multiple combined parts are produced and are output simultaneously such that both of said first and second outputs show said at least one video part as modified by said effect for said video part, and where said effect modifies a look of said video part on both of said first and second outputs, wherein said image producing device stores a shape which forms a perimeter of a projected image.

9. A system, comprising:

a computer-based part which produces an image output, and which produces a dimming output indicative of an amount of dimming to be carried out on said image output, said computer-based part including a port for said image output which is adapted to be connected to a display that displays but does not project;

a dimmer, receiving said dimming output, and also receiving said image output, and operating to produce a dimmed output by dimming said image output by an amount indicative of said dimming output, and where said dimmed output is produced on a port that is adapted to be connected to a projecting lamp that projects light, where both said image output and said dimmed output are indicative of a same information; and

said computer based part including an input for a control from a remote console which allows controlling image output to one of a plurality of different image outputs.

10. A computer system as in claim 9, further comprising an operator display, receiving and displaying said image output at a first brightness, and another output port for said dimming output.

11. A computer system as in claim 10, wherein another output port connects to a projector that projects said image output at a reduced brightness.

6

12. A computer system as in claim 9, further comprising an analog multiplier that receives said dimming output, and multiplies said image output by said dimming output to produce said image output.

13. A computer system as in claim 9, wherein said computer based part produces a composite image using multiple layers which is used to produce said image output.

14. A computer system as in claim 13, wherein one set of layers subtracts from another layer to produce said image output.

15. A computer system as in claim 13, wherein one set of layers provides transparency to another of said layers to produce said image output.

16. A system as in claim 13, wherein one of said multiple layers is a continuous animation.

17. A system as in claim 13, wherein said image producing device produces a continuous animation as one of said multiple layers, and produces a shaped layer as another of said multiple layers, said shaped layer controlling an outer perimeter shape of said continuous animation.

18. A system as in claim 9, further comprising an image producing device stores a shape which forms a perimeter of a projected image.

19. A method, comprising:

receiving an input for a control from a remote unit, where said input selects from among multiple different image outputs;

producing an image output;

producing a dimming output indicative of an amount of dimming to be carried out on said image output;

displaying said image output at a full brightness on a display that does not project;

using said dimming output to produce a dimmed version of said image output; and

projecting said dimmed version of said image using a projector which projects at a target, at the same time as said displaying said image output, where both said image output and said dimming output are indicative of a same image.

20. A method as in claim 19, wherein said using said dimming output to produce a dimmed version of the image comprises multiplying said image output by said dimming output to produce said dimmed version of said image.

21. A method as in claim 19, further comprising producing said image output using multiple layers which is used to produce said image output.

22. A method as in claim 21, wherein one of said multiple layers is a continuous animation.

23. A method as in claim 21, further comprising producing a continuous image as one of said multiple layers, and produces a shaped layer as another of said multiple layers, said shaped layer controlling an outer perimeter shape of a continuous animation.

* * * * *