



US008720152B2

(12) **United States Patent**
Kempf et al.

(10) **Patent No.:** **US 8,720,152 B2**
(45) **Date of Patent:** **May 13, 2014**

(54) **TRUSS HINGE WITH ANGULAR
VARIABILITY**

(75) Inventors: **James Kempf**, Wallkill, NY (US); **Scott Gross**, Atlanta, GA (US)

(73) Assignee: **Production Resource Group, LLC**,
New Windsor, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 123 days.

(21) Appl. No.: **13/098,410**

(22) Filed: **Apr. 30, 2011**

(65) **Prior Publication Data**

US 2011/0265421 A1 Nov. 3, 2011

Related U.S. Application Data

(60) Provisional application No. 61/329,842, filed on Apr. 30, 2010.

(51) **Int. Cl.**
E04B 1/344 (2006.01)
E04B 1/24 (2006.01)
E04B 1/343 (2006.01)

(52) **U.S. Cl.**
CPC **E04B 1/344** (2013.01); **E04B 1/2403**
(2013.01); **E04B 1/34336** (2013.01)
USPC **52/646**; 52/167.1

(58) **Field of Classification Search**
USPC 52/641, 645, 167.1, 167.3, 643, 646,
52/649.5
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,711,131 A * 1/1998 Thomas 52/656.9

* cited by examiner


Primary Examiner — William Gilbert

(74) *Attorney, Agent, or Firm* — Law Office of Scott C. Harris, Inc.

(57) **ABSTRACT**

A truss hinge that allows hinging between truss parts, and also allows configuration into a different size.

10 Claims, 10 Drawing Sheets

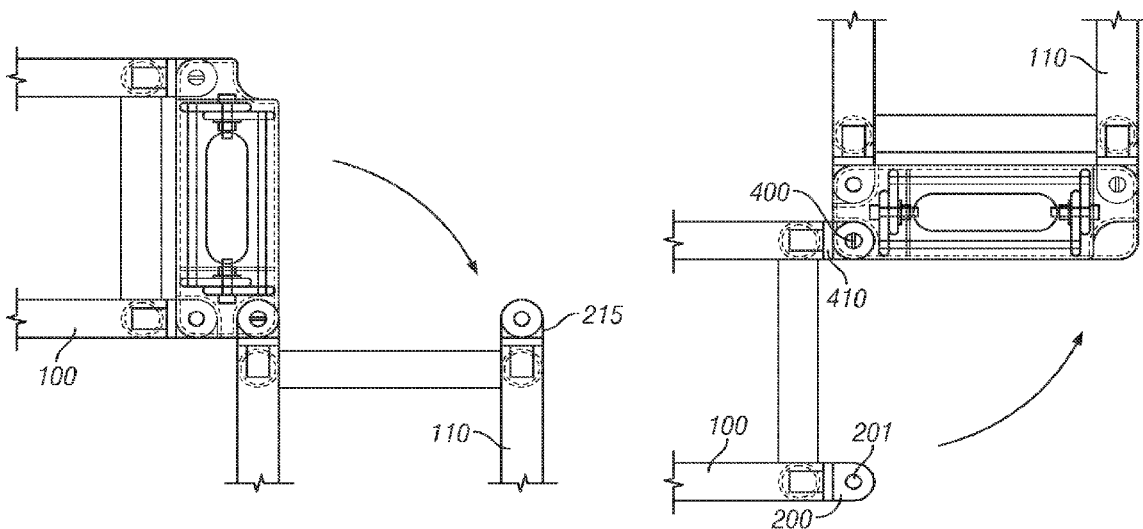

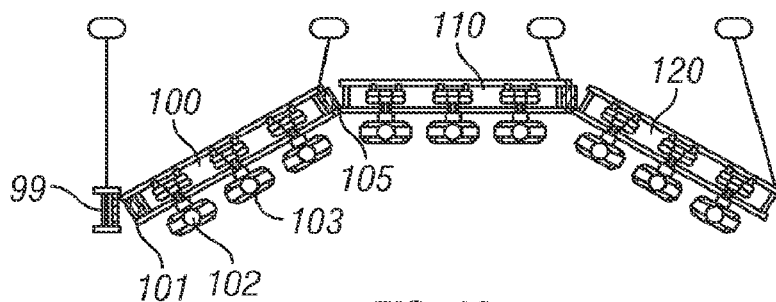


FIG. 1A

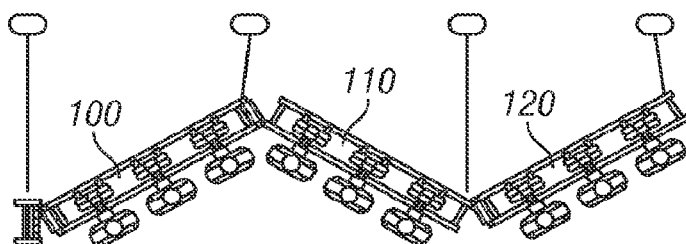


FIG. 1B

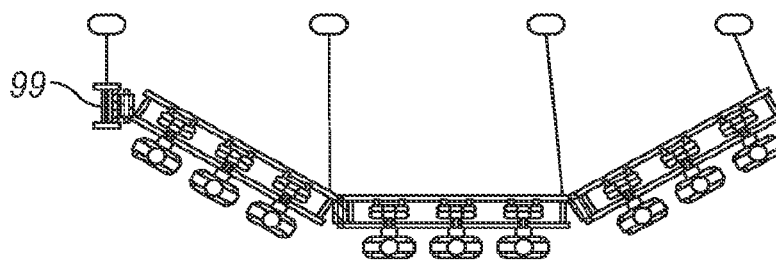


FIG. 1C

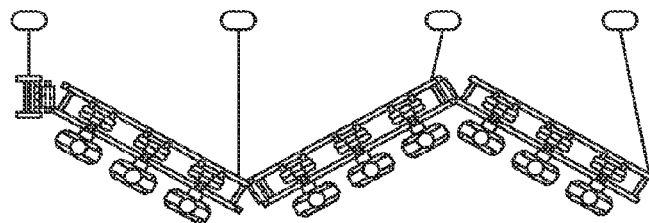


FIG. 1D

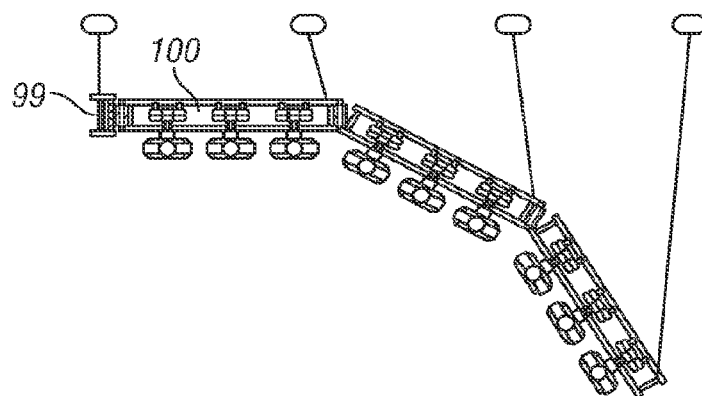


FIG. 1E

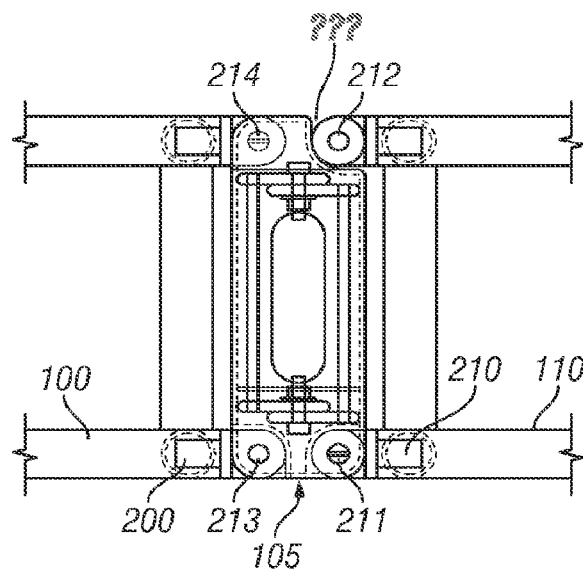


FIG. 2

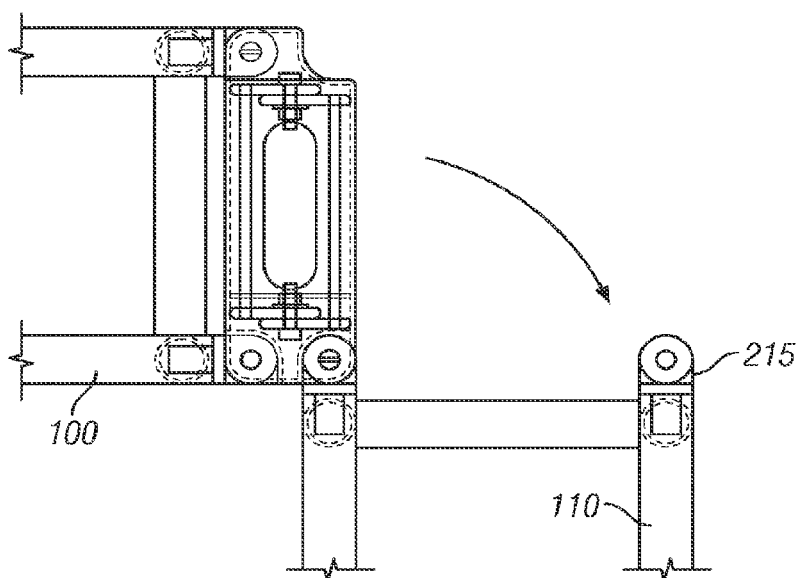


FIG. 3

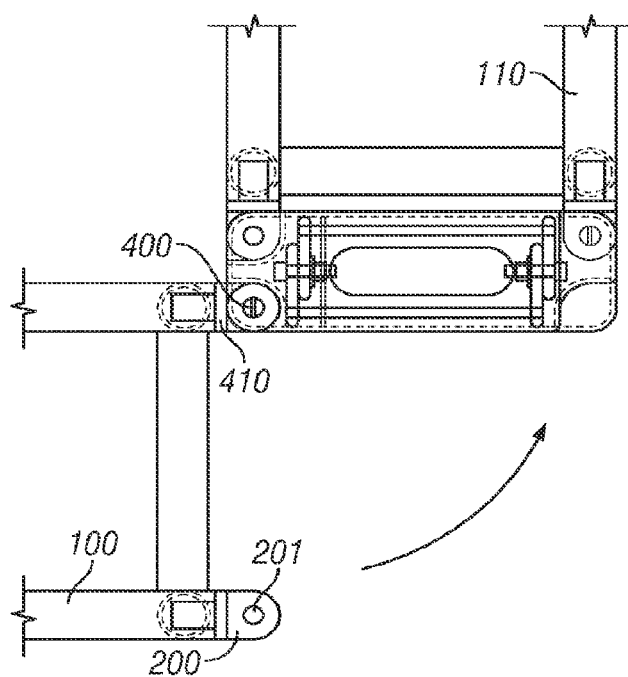


FIG. 4

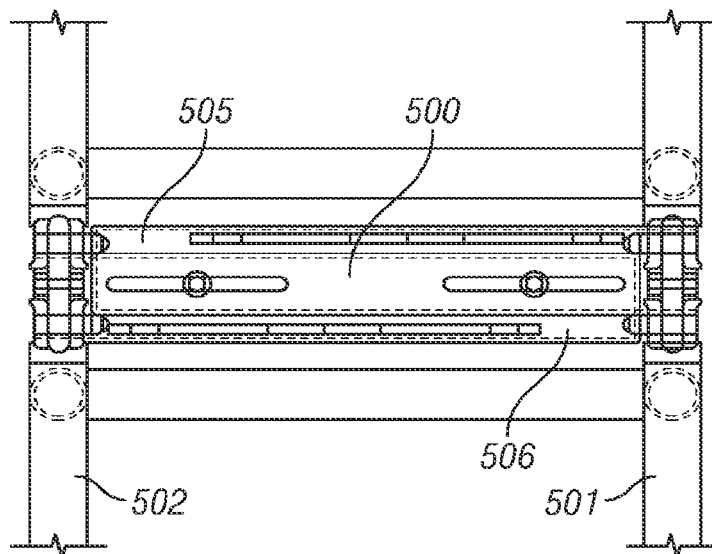


FIG. 5A

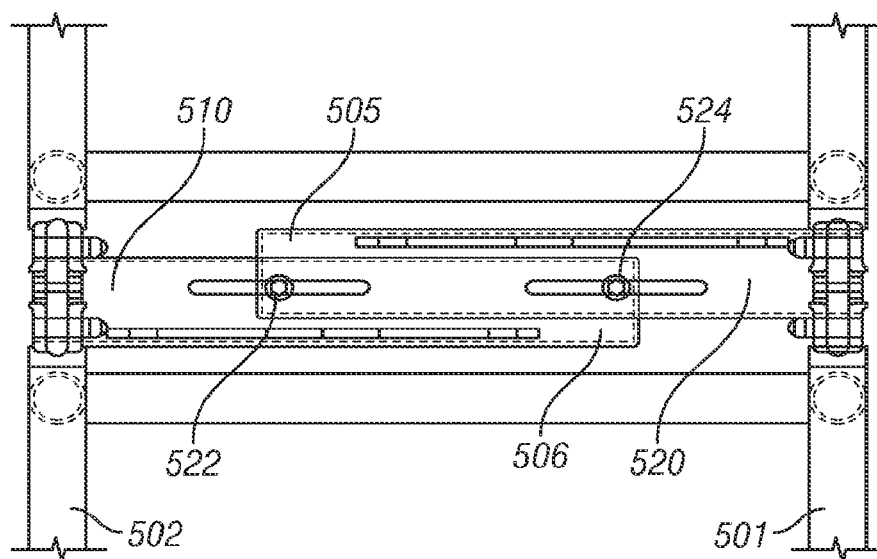


FIG. 5B

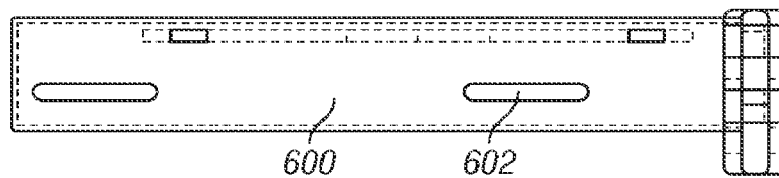


FIG. 6

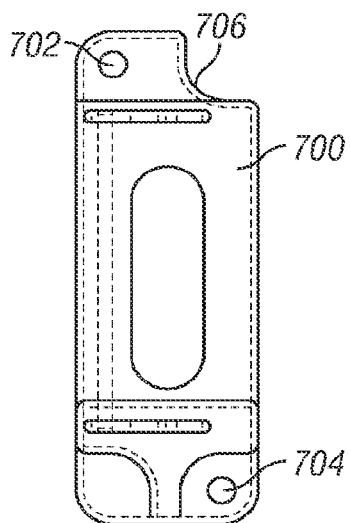


FIG. 7

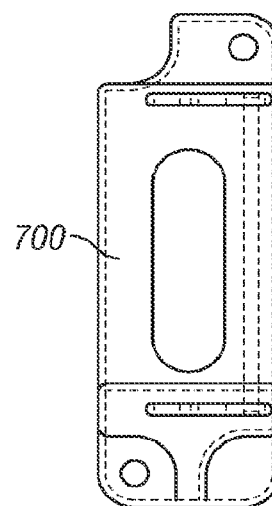


FIG. 8

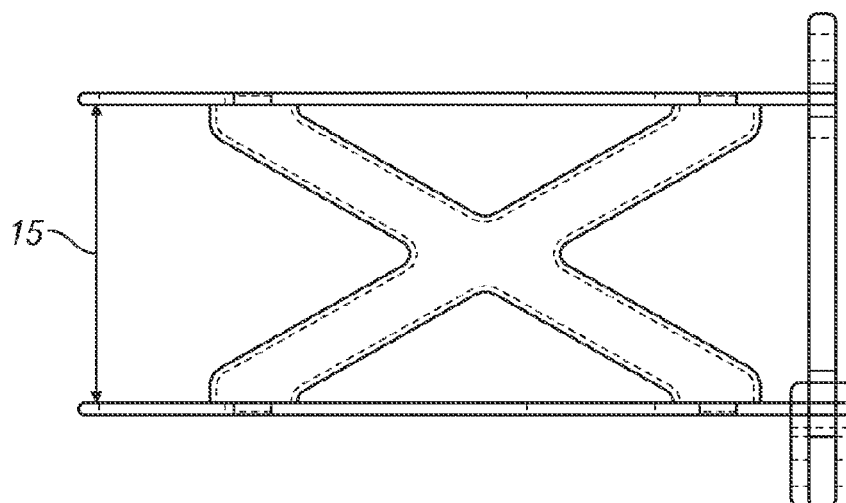


FIG. 9



FIG. 10

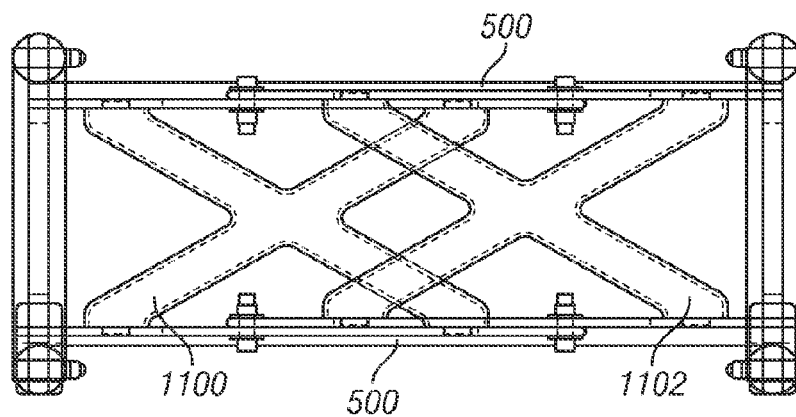


FIG. 11

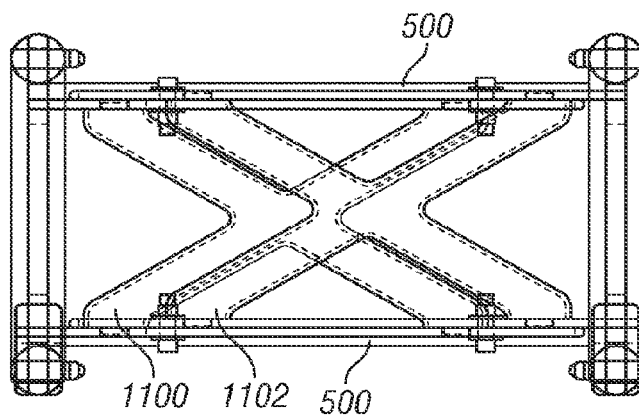


FIG. 12

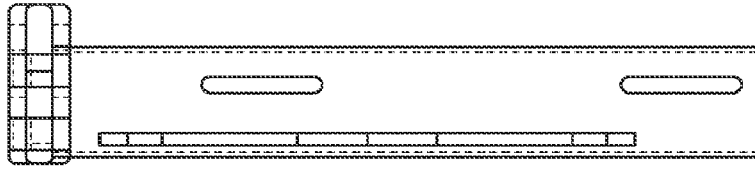


FIG. 13A

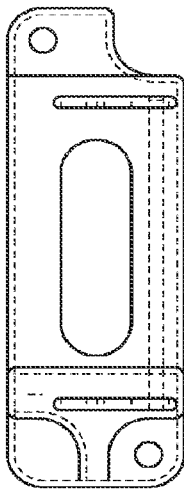


FIG. 13B

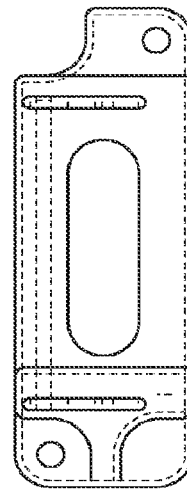


FIG. 13C

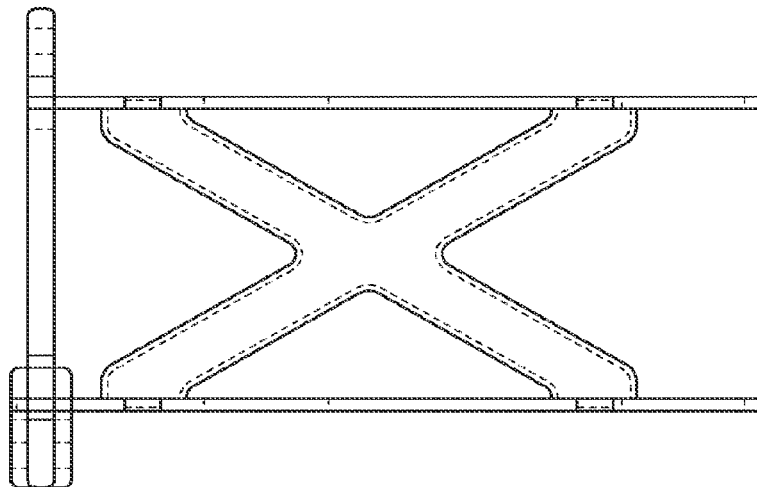


FIG. 13D

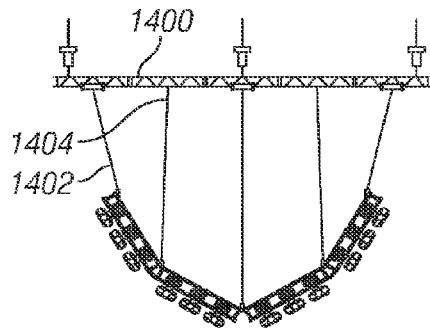


FIG. 14A

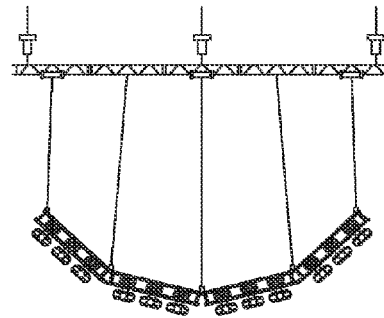


FIG. 14B

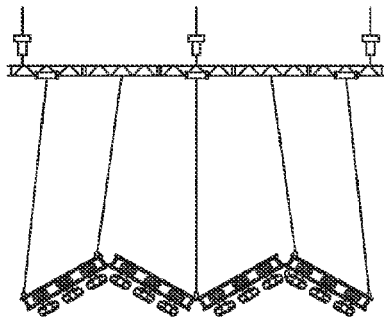


FIG. 14C

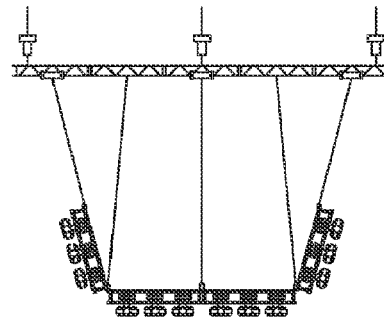


FIG. 14D

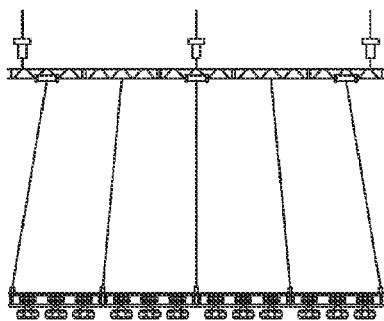


FIG. 14E

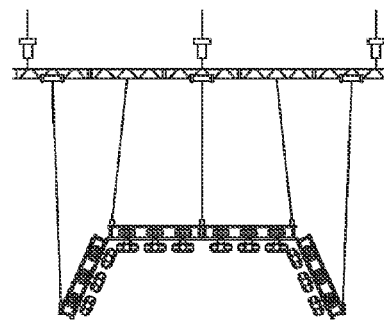


FIG. 14F

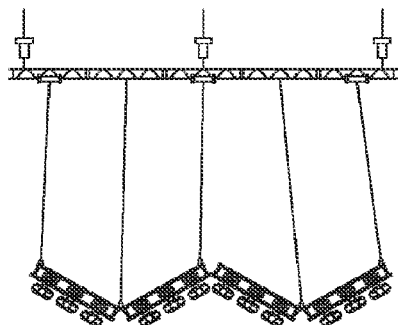


FIG. 15A

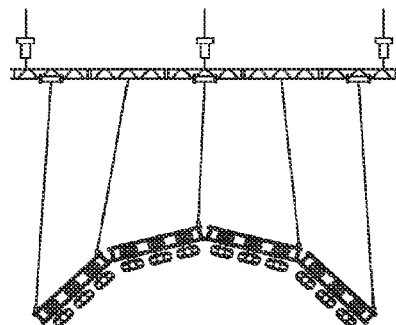


FIG. 15B

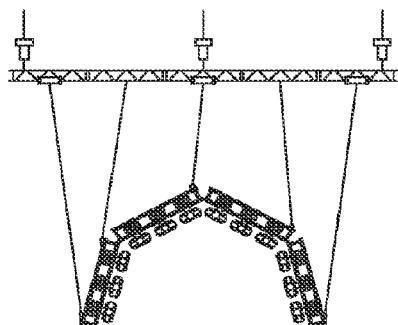


FIG. 15C

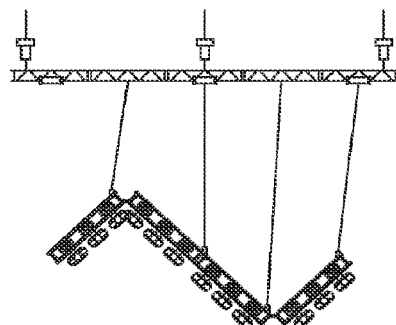


FIG. 15D

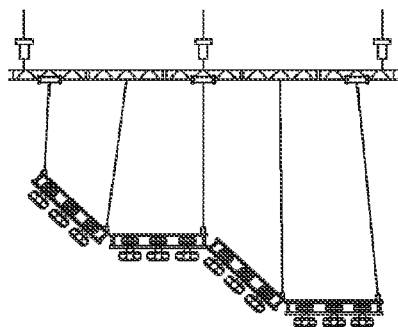


FIG. 15E

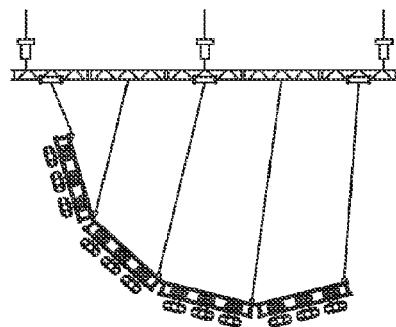


FIG. 15F

1

TRUSS HINGE WITH ANGULAR VARIABILITY

This application claims priority from provisional application No. 61/329,842, filed Apr. 30, 2010, the entire contents of which are herewith incorporated by reference.

BACKGROUND

Trusses are often used in stage lighting applications to hold stage lights and other items as supports relative to the stage, e.g., above the stage level as supported from a supporting beam above a stage or other object of lighting. Two pieces of truss may be connected together to form longer overall trusses.

SUMMARY

An embodiment describes a truss hinge that connects to truss parts, and allows hinging between different parts.

According to one embodiment, the hinge allows movement of the two hinge parts in two opposite directions.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A-1E show exemplary truss configurations using the truss hinge according to an embodiment;

FIG. 2 shows a close-up of the different parts forming the hinging part of the truss hinge;

FIG. 3 shows the truss hinge in a 90° rotated down configuration;

FIG. 4 shows the truss and hinge in a 90° rotated up configuration;

FIGS. 5A and 5B show the spreader bars that provide the truss hinge with different configurability;

FIGS. 6-9 shows the different parts that make up the right side hinge half;

FIGS. 11 and 12 show a side view of respectively expanded and contracted spreaders;

FIGS. 13 A-13 D show the different parts that make up the left side hinge half; and

FIGS. 14 and 15 show different hanging configurations for the hinged trusses and their parts.

DETAILED DESCRIPTION

The truss hinges used herein have hinged connection parts between the trusses. The trusses are each attached to one side of the hinge. The hinge can move between different angles and in different directions, thereby hinging the truss pieces at different angles between one another.

In an embodiment shown in FIGS. 1A-1E, a number of truss parts **100**, **110**, **120** are connected together by truss hinges **105** according to an embodiment, to form a connected truss assembly. The different truss parts can be configured to have different angles between them using the truss hinge **105**.

FIGS. 1A-1E show the different ways in which the different truss parts can be connected. FIG. 1A shows three truss parts **100**, **110**, **120**. The truss part **100** is an end piece and is connected to a typical truss hub **99** via the truss end piece **101**. The truss parts have hanging items such as **101**, **102**, **103** supported therefrom. The hanging items can be moving lights or winches, or any other device that can be supported from a truss for use in a theatrical production, for example. These hinges can use adjustable spreaders that fit the PRG 15×24 and 15×30 BAT Truss™ for concert touring lighting. Note in FIG. 1B, truss **100** and **110** have a first direction hinging

2

between them, and truss **110** and **120** have a second direction hinging between them. The first direction and second direction are opposite directions.

Each truss such as **100** can be hinged by a hinging connection such as **105** relative to each truss piece to which it is attached. In the embodiment, each truss piece may have spigots at its end part. The hinging connection connects between spigots of the two truss parts **100**, **110**, to connect one spigot of one truss part to another spigot of another truss part via the hinge connection **105**.

FIG. 2 illustrates a detail of the connection between the different truss parts. The first truss part **100** has its end adjacent area **105** with a female spigot **200**. The second truss part **110** has its end adjacent area **105** with a male spigot **210**. The hinge device **105** connects the two spigots to one another, and also allows disconnection relative to one another to allow the two parts to hinge relative to one another. For example, to allow the hinge to rotate downward (in the perspective of FIG. 2), the system as shown in FIG. 2 is configured with no retaining pin in the male spigot location **212**, but does have a pin **211** in the connection area near spigot **210**. This allows the top parts of the trusses to freely rotate on the pin **211** adjacent the male spigot **210**. The area **213** may also be configured with no pin, thereby allowing hinging on the oppositely placed pin **214**.

The pins such as **215** may be 3/4 inch cotter pins, for example.

According to one embodiment, the hinge can itself have left and right portions, with the left portion in FIG. 2 connected to the truss **100**, and the right portion configured to connect to the truss **110**. The left portion and right portions can be connected to one another, or can be hinged relative to one another.

FIG. 3 shows how the part **110** can rotate down relative to the part **100**, because there is no pin holding the male spigot **215**. This may allow the hinging in the first direction.

FIG. 4 shows how the spigot **200** may also be formed with no pin in the hole **201** the side of the hinge that is opened by the pivoting. A pin **400** forms a rotational part that holds to the spigot **410**. This allows the part **110** to pivot "up", thus hinging in the second direction, opposite to the first direction. Thus, the same hinge allows pivoting in two opposite directions. The opposite directions are opposite angular directions, in the sense that the angle may get "larger" in the first direction, and may get "smaller" in the second direction, or vice versa.

More generally, the hinge assembly allowing the hinging on the pinned spigot holes, relative to the non-pinned spigot holes.

FIGS. 1A-1E show different configurations that can be obtained from the trusses with these hinges. FIGS. 1A and 1B show alternate views of zigzag configurations. FIGS. 1A and 1B shows how the end piece **101** may be hinged relative to the hub **99**, and how each piece such as **100** may be hinged relative to another piece. FIGS. 1C and 1D shows how the end piece may be completely oppositely hinged relative to the hub piece **99**. FIG. 1E shows how the first piece **100** may be connected flat to the hub **99**. In the embodiment, the different pieces can be hinged differently relative to the hub and relative to one another. All of these use the same truss hinge.

According to an embodiment, the hinges also allow connection to different size trusses by adjustment of the hinge size. FIG. 5A shows a 15×24 truss length configuration, while a 15×30 truss is shown in FIG. 5B. A special adjustment plate **500** is located between the truss parts **501**, **502**. The adjustment plate has two partly overlapping plates **505** and **506**. When the adjustment plate **500** is in the position shown in

3

FIG. 5A, its two plates **505,506** are completely overlapping in length, causing the minimum length between their edges. Here, each plate **505, 506** is 24 inches long, and this causes the truss to be contracted to a 24 inch size between the truss bar **501** and the opposite truss bar **502**.

When the adjustment plate **500** is in its extended position as in FIG. 5B, the two plates **505, 506** only partly overlap leaving areas **510** and **520** extending and not overlapping. The areas **510** and **520** are each 3 inches long. This forms parts of the spreader bar that do not overlap completely with one another and increase the distance between bars **501** and **502** by 3 inches each, for a total of 6 inches, to form a 30 inch spread.

The two plates **505, 506** of the spreader are screwed together at **522, 524**.

FIG. 6 illustrates the different parts making up the hinge assembly according to the embodiments. For example, element **600** may form the spreader plates **505, 506** that is connected to the other spreader plate. The spreader plate includes a long slotted portion **602** which enable screwing to another corresponding plate.

FIGS. 7 and 8 illustrate details of the left and right hinged pieces. The left side view shown in FIG. 7 shows the hinge part **700**, with its hinging holes **702** and **704**. Note that there are no holes in the area **706**, allowing free hinging in those areas. The first and second parts respectively shown in FIGS. 7 and 8 are shaped to be mirror images of one another. Taking FIG. 7 as representative, it can be seen that each of the parts in essence is a rectangle with rounded corners. Two of those corners near **702** and **704** are extending corners, and the other two of the corners, such as near **706**, are indented rounded corners. The two corners **702** and **706** with tens therein are opposite one another both in horizontal and vertical directions. The other two corners are free and unpinned portions in opposite corners from said first and second corners.

FIG. 9 shows a cross piece style support **900** across the 15 inch portion of the cross pieces between the top and bottom of the truss.

As described above, the hinge can be used on either a 15x30 truss or a 15x24 non-extended position using the spreaders **500**. The spreaders **500** in their extended position are shown in FIG. 11, where the truss is extended into its extended form. In this position, the two cross shaped areas **1100, 1102** are offset from one another. When the plates are moved to their fully overlapped position as shown in FIG. 5A, the truss is in the position shown in FIG. 12, where the two cross shaped portions **1100** and **1102** mostly overlap in position.

The left hinge half is mirrored from the right hinge half, shown in FIGS. 13A-13D.

FIG. 14 shows another embodiment, where the connections to the truss ends and other parts that are not connected to a fixed hub at least at one end. In FIG. 14, the main support **1400** is shown, and the main support has a number of cables connected. The cables **1402, 1404** are each connected to hold a truss piece, with one cable at each end. FIG. 14 shows a first truss connection set, and FIG. 15 shows a second truss connection set. The cables can be connected, for example, to at least one of the first and second parts forming the hinges.

Although only a few embodiments have been disclosed in detail above, other embodiments are possible and the inventors intend these to be encompassed within this specification. The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative which

4

might be predictable to a person having ordinary skill in the art. For example other shapes besides the ones shown in the figures can be formed.

Also, the inventors intend that only those claims which use the words "means for" are intended to be interpreted under 35 USC 112, sixth paragraph. Moreover, no limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims.

Where a specific numerical value is mentioned herein, it should be considered that the value may be increased or decreased by 20%, while still staying within the teachings of the present application, unless some different range is specifically mentioned. Where a specified logical sense is used, the opposite logical sense is also intended to be encompassed.

The previous description of the disclosed exemplary embodiments is provided to enable any person skilled in the art to make or use the present invention. Various modifications to these exemplary embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without departing from the spirit or scope of the invention. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

What is claimed is:

1. A truss hinge, comprising:

a first connecting part that connects to a first truss that is of a type to hold hanging equipment, where said first truss has both first and second support pieces and where said first connecting part forms a first hinging point between said truss hinge and said first truss; and

a second connecting part, that connects to a second truss, separate from the first truss and of a same type as the first truss, said second connecting part forming a second hinging point between said truss hinge and said second truss,

where said first hinging point hinges in a first rotational direction between said first connecting part and said first truss, and said second hinging point hinges in a second rotational direction, opposite to said first rotational direction, between said first connecting part and said second truss.

2. The hinge as in claim 1, wherein said first hinging point is at a place where the first connecting part connects to the first truss, and said second hinging point is at a place where the second connecting part connects to the second truss.

3. The hinge as in claim 1, further comprising a spreader part, that separates a distance of both said first part and said second part, to accommodate different sized trusses for both said first connecting part and said second connecting part.

4. The hinge as in claim 1, wherein said first connecting part is connected to only said first support piece of said first truss and has a non-connecting surface for pressing against said second support piece of said first truss, and wherein said second connecting part is connected to only said second support piece of said second truss, and has a second non-connecting surface for pressing against said first support piece of said first truss.

5. The hinge as in claim 4, wherein said non-connecting surface and said second non-connecting surface each comprise a rounded surface that presses against a rounded spigot end of said trusses without connecting to said rounded spigot end.

6. The hinge as in claim 5, wherein said first part and said second part each have free and unpinned portions in opposite corners at said non-connecting surface and said second non-connecting surface.

7. The hinge as in claim 1, wherein said first connecting part and said second connecting part are shaped to be mirror images of one another.

8. The hinge as in claim 1, wherein said truss hinge has corners which are substantially rounded. 5

9. The hinge as in claim 8, wherein said truss hinge has first and second corners which are substantially rounded, and opposite corners which are indented and substantially rounded.

10. The hinge as in claim 1, wherein said hinge is substantially rectangular with rounded edges, with first and second oppositely facing rounded edges that are convex and respectively connect with, and allow hinging of the first support piece of the first truss, and the second support piece of the second truss, and having third and fourth oppositely facing rounded edges that are concave, and respectively press against the second support piece of the first truss and the first support piece of the second truss. 10 15

* * * * *