

(12) **United States Patent**
Snyder et al.

(10) **Patent No.:** **US 9,342,157 B2**
(45) **Date of Patent:** **May 17, 2016**

(54) **VIDEO BUTTONS FOR A STAGE LIGHTING CONSOLE**

(75) Inventors: **Michael Snyder**, Southlake, TX (US);
James Bornhorst, DeSoto, TX (US);
Charles Reese, Grapevine, TX (US);
Rusty Brutsche, Austin, TX (US)

(73) Assignee: **Production Resource Group, LLC**,
New Windsor, NY (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 2725 days.

(21) Appl. No.: **11/777,028**

(22) Filed: **Jul. 12, 2007**

(65) **Prior Publication Data**

US 2008/0012849 A1 Jan. 17, 2008

Related U.S. Application Data

(60) Provisional application No. 60/830,490, filed on Jul.
12, 2006.

(51) **Int. Cl.**
G06F 3/00 (2006.01)
G06F 3/023 (2006.01)

(52) **U.S. Cl.**
CPC **G06F 3/0238** (2013.01)

(58) **Field of Classification Search**

USPC 345/1.1–6, 173
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,001,807	A *	1/1977	Dallimonti	345/1.3
6,492,978	B1 *	12/2002	Selig et al.	345/173
6,992,659	B2 *	1/2006	Gettemy	345/173
2003/0128191	A1 *	7/2003	Strasser et al.	345/173
2006/0158461	A1 *	7/2006	Reese et al.	345/620
2006/0163945	A1	7/2006	Bornhorst et al.	
2006/0181517	A1 *	8/2006	Zadesky et al.	345/173
2007/0147054	A1	6/2007	Bornhorst	
2007/0211171	A1	9/2007	Hunt et al.	

* cited by examiner


Primary Examiner — Michael Faragalla

(74) *Attorney, Agent, or Firm* — Law Office of Scott C
Harris, Inc

(57) **ABSTRACT**

Video buttons controlling stage lights. Each of the buttons includes a video part, which displays either video or an image that previews the function that is carried out by the button when it is pressed. The buttons can be full-color buttons that show full color videos. An array of buttons can be grouped together, so that the array can operate in different modes, one of which in which the array shows an overall display, and another of which in which the array shows a single function per button. Different technologies including analog switches, touch screens, and the like can be used.

33 Claims, 5 Drawing Sheets

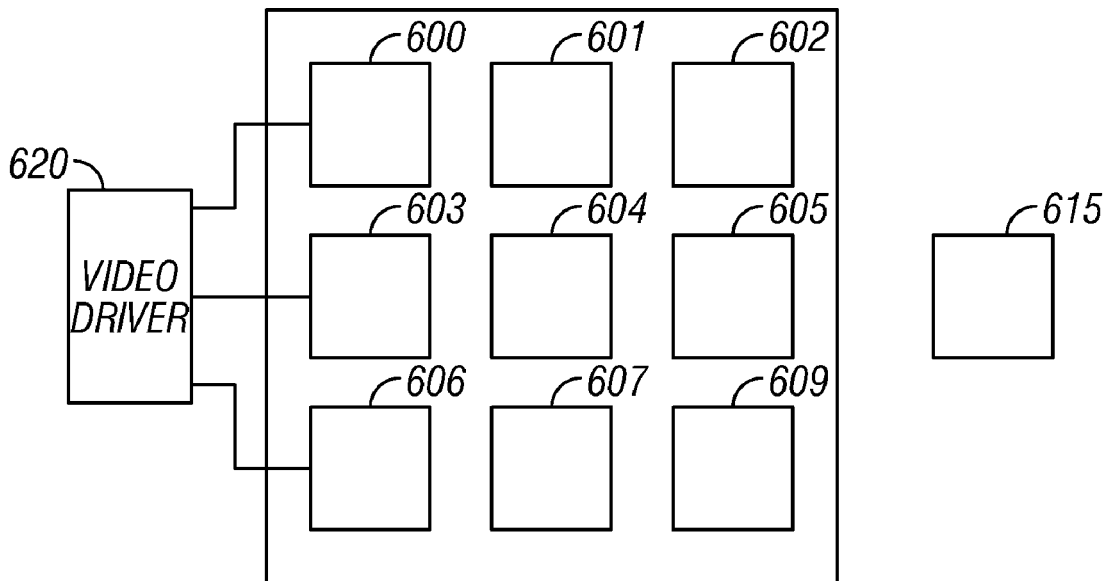

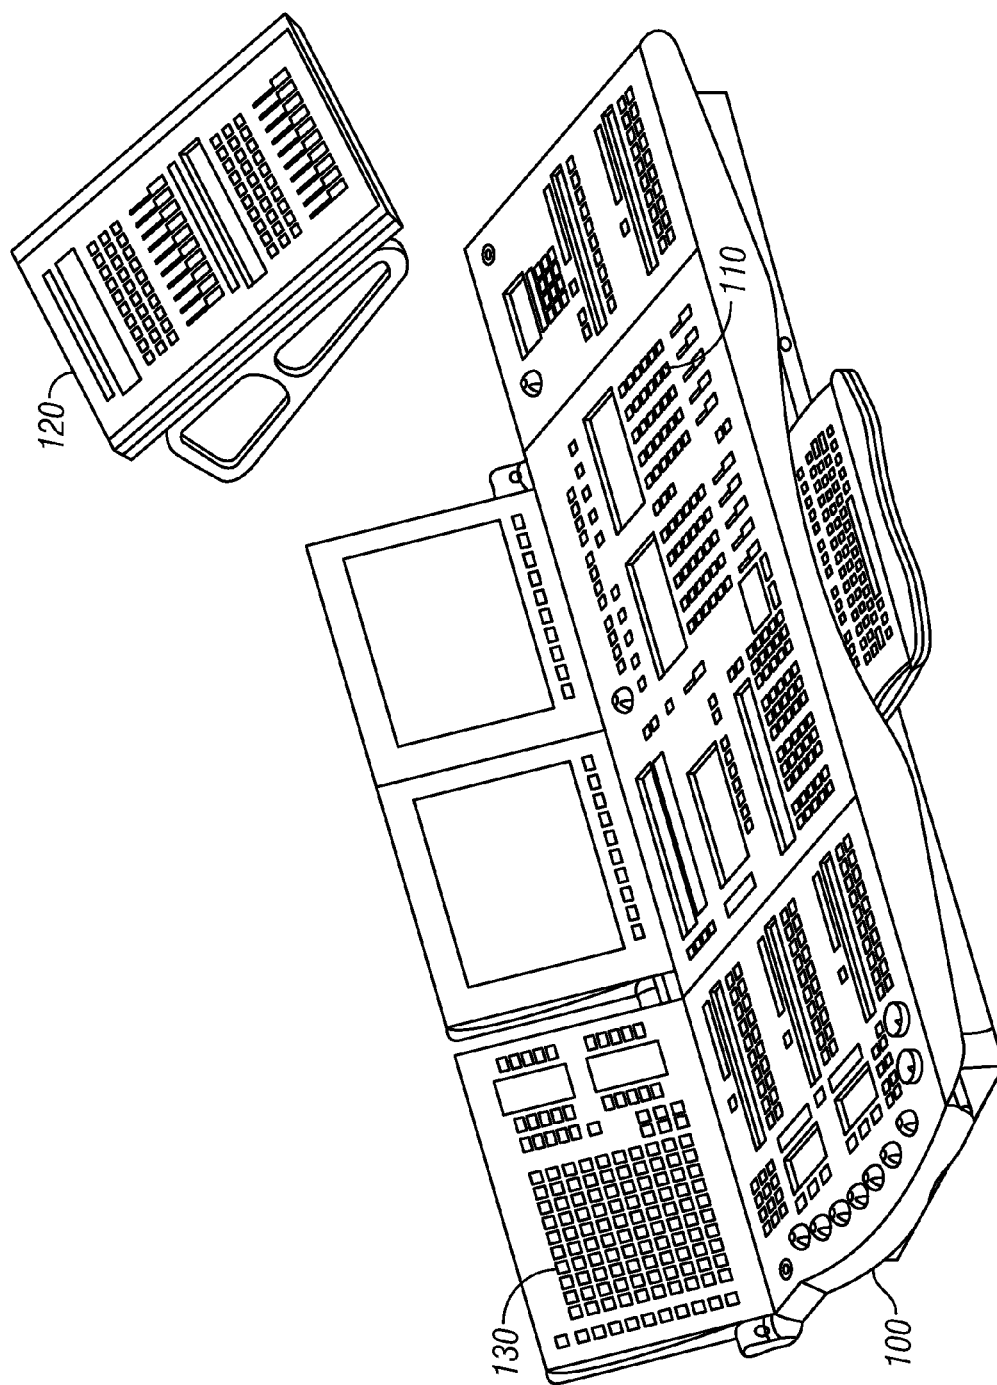


FIG. 1

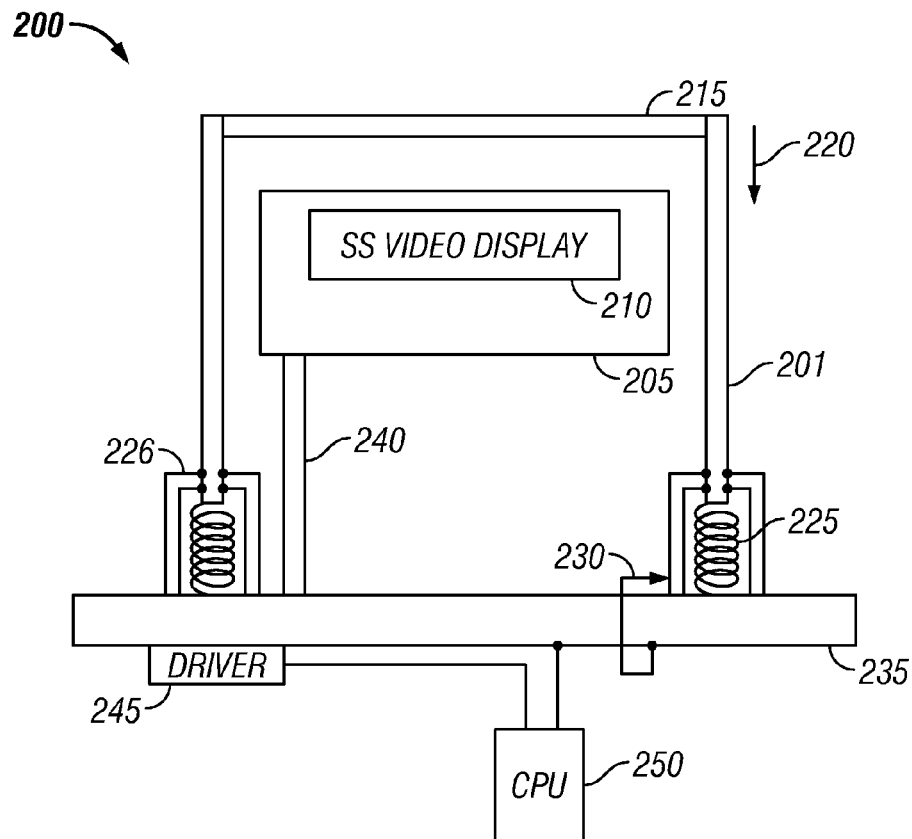


FIG. 2

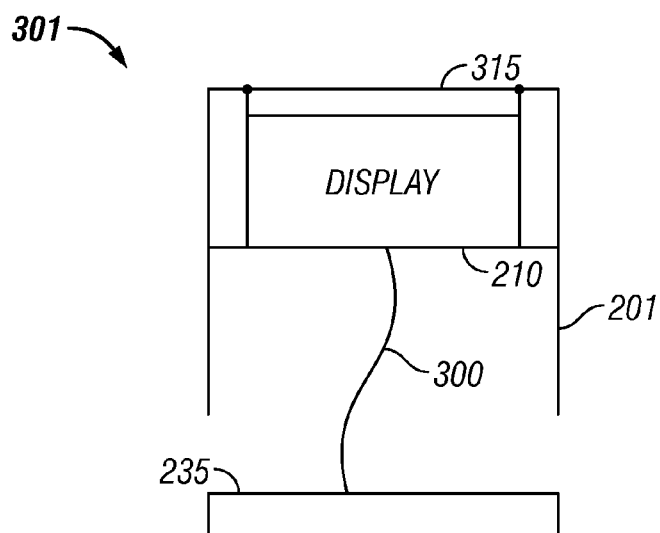


FIG. 3

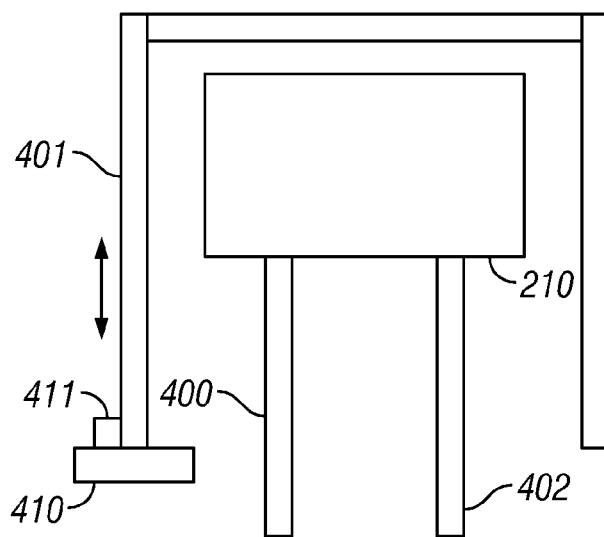


FIG. 4

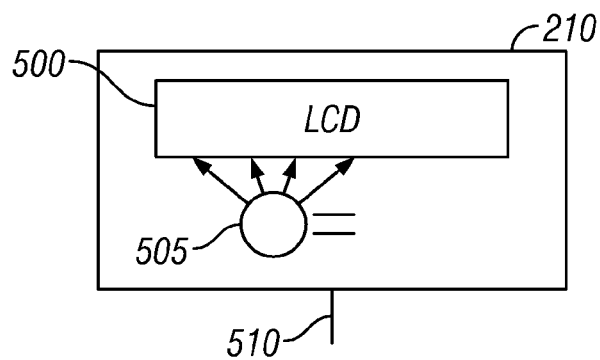


FIG. 5A

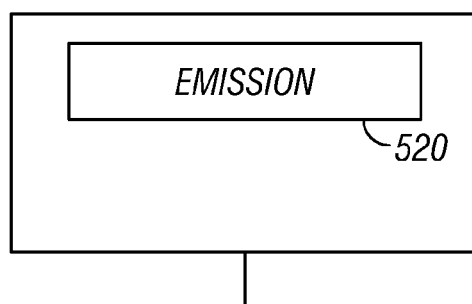


FIG. 5B

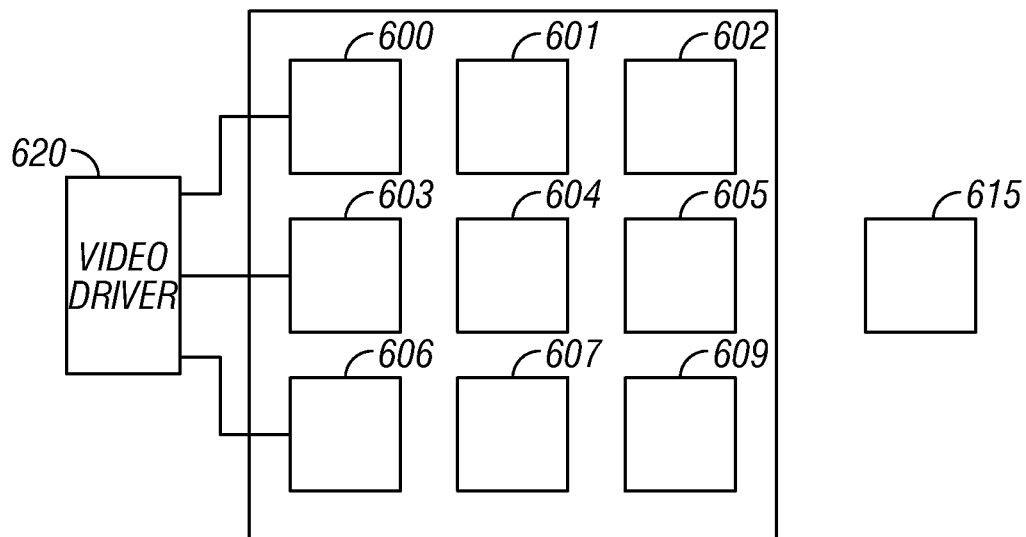


FIG. 6

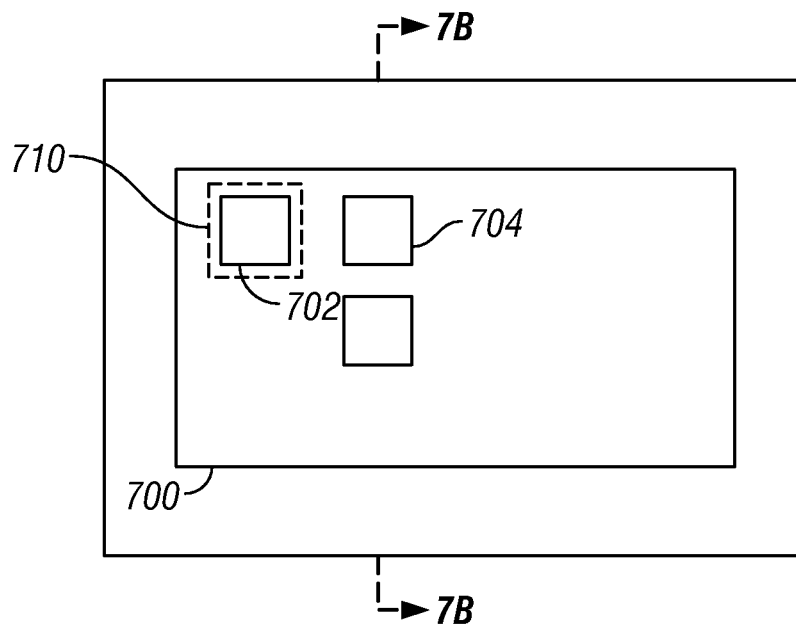


FIG. 7A

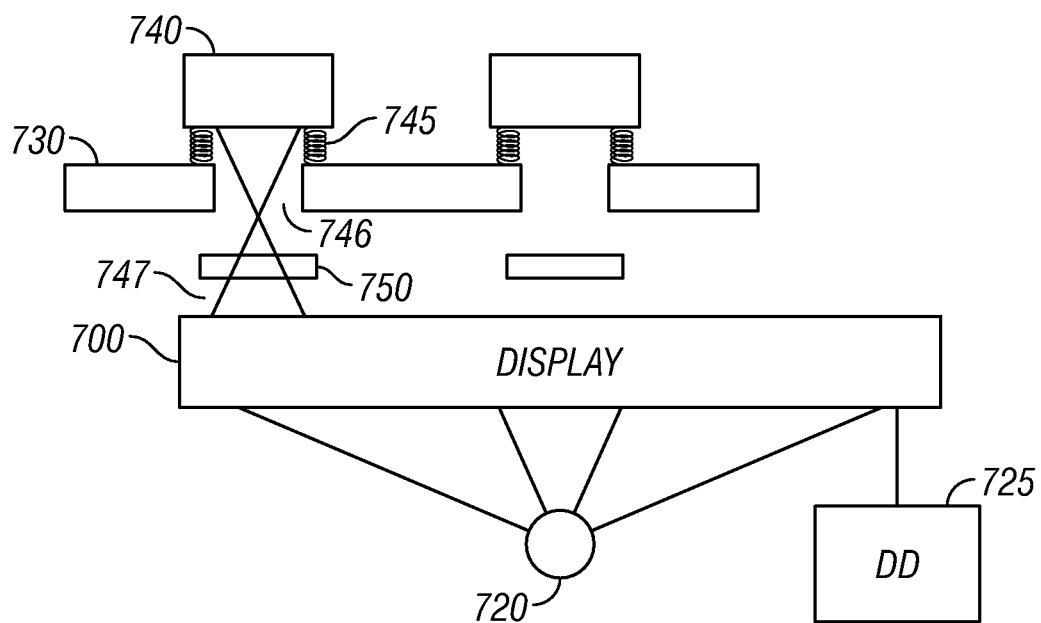


FIG. 7B

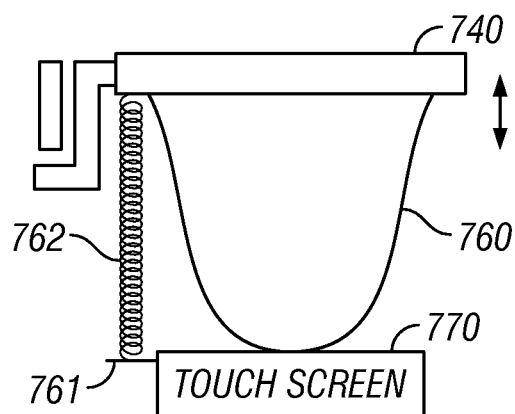


FIG. 7C

VIDEO BUTTONS FOR A STAGE LIGHTING CONSOLE

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to U.S. Provisional Application No. 60/830,490, filed Jul. 12, 2006.

BACKGROUND

Stage lighting consoles, such as the Virtuoso® series of consoles, allow control of a number of different parameters on stage lights and other controllable devices. These remote lights may all be located at different locations. For example, the Virtuoso® console may allow control of 2000 multiple parameter luminaires via the DMX 512 control format, and control between 2000 and 10,000 cues per fixture, with multiple presets, effects, beam selects, macros, and snapshots, as well as other effects.

FIG. 1 illustrates an exemplary console **100**. The console includes many different controlling buttons, shown as **110**. Since multiple parameters and multiple luminaires may be controlled by these buttons, these buttons may be dynamically assigned to different parameters. The parameters controlled by the dynamically-assigned buttons should be viewable in some way.

The console may include the main button area **110**, auxiliary areas such as **120**, and other areas.

Control of digital lights and other digitally and/or electronically controllable lights may control various effects on the digital lights, including for example video, color, shape, and the like. The complex control of the digital lights allows control of many different functions.

Touch screens are known, in which different areas of the touch screen can be used for different functions. However, touch screens typically provide no tactile response to a user. The so-called “feel” of a control board may be extremely important. While a designer or operator is looking at the stage, they want to be able to control by feel. Such is not possible in a conventional touch screen.

SUMMARY

The present application describes the use of buttons which can display information about the control which is currently assigned to the buttons.

Embodiments describe buttons that may display pictures, video and the like.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other aspects will now be described in detail with reference to the accompanying drawings, wherein:

FIG. 1 shows an exemplary console layout;

FIG. 2 shows an embodiment with a solid-state video display mounted inside a button, where the display can show the function of the button;

FIG. 3 illustrates an embodiment where the display moves as the button is actuated;

FIG. 4 illustrates an embodiment where the display is fixed in position on the button mode;

FIGS. 5A and 5B show respectively nonemissive and emissive display systems used in this button embodiment;

FIG. 6 shows an embodiment using multiple different buttons in an array;

FIGS. 7A and 7B illustrates an embodiment where the single display forms the video for multiple buttons; and

FIG. 7C illustrates an embodiment using a touchscreen for a video button.

DETAILED DESCRIPTION

The general structure and techniques, and more specific embodiments which can be used to effect different ways of carrying out the more general goals, are described herein.

A first embodiment uses a solid-state display element in conjunction with any or all of a plurality of selectable buttons, such as any of the buttons in areas **110**, **120** or **130**, in the console of FIG. 1.

A first embodiment is shown in FIG. 2. Each module **200** forms one switch of an array of switches such as **110**. The module includes a switch housing **201**, surrounding a video module **205** which includes a video display element **210**. The video display element **210** can be a liquid crystal, light emitting diode, LCOS type device, or any other solid-state device which allows full color and full-motion display. The video display is located under a clear plastic window **215** that forms a top part of the housing. The plastic window **215** is movable as shown by the arrow **220**.

A spring assembly **225** maintains the housing **201**, and the clear plastic window **215** in the up position. However, when the window **215** is depressed, it can be depressed against the force of the spring bias, into the downward position. A switch assembly **230** is placed in a location to be actuated by the movement of housing **201**, to cause an actuation.

A circuit board **235** may be associated with the switch. The actuation is sensed by circuit board **235**. The video element **205** is also connected via a connection **240** to the circuit board **235**. The circuit board can be a convenient package for holding these elements. Alternatively, however, the elements may be attached directly to the housing **201**, or packaged in some other way.

Also, mechanical elements shown as guide elements **226** hold or guide the walls forming the switch element into place. The guide elements **226** guide the housing **201** in its movements between the up and down positions. The housing **201** is typically normally spring biased in the up position, and pressed into the down position in order to actuate the switch assembly **230**. The actuation causes an indication of the actuation via the switch **230**, to the circuit board.

A video driver **245** is connected via a connection **240** to the video display **210**, and allows displaying video information indicative of the current operation and/or function of the switch.

The switch may be configured to control a specific function by operation of a remote controller, shown generically as CPU **250**. The CPU may operate according to a stored program to dynamically assign different switches to different functions. The CPU provides information to the switch **200** about the different image or other information that the switch will control.

For example, if the switch **200** is configured to currently control a lamp to display a “cloud” type environment, then clouds may be displayed on the display **210**. The CPU **250**, which may be a media server, or any other kind of processing element, controls the driver **245** to make the appropriate display. CPU **250** is also connected to the circuit board **235**. CPU **250** receives an indication of switch actuation from the circuit board.

The CPU and driver can control full color graphic video display **210**, and can control the display **210** to display, for example, video, gobos, colors, text, graphical signals, or

thumbnail clips of video or short displays of video. These displayed items that are displayed on the video display **210** can be provided by the CPU **250**, especially when the CPU is or is connected to a media server.

The switch may take a number of different forms. FIG. **3** illustrates a first form, which may avoid or reduce a parallax error. In FIG. **2**, the housing moves independently of the display, and hence the distance between the display **210** and the window **215** varies during pressing. In this embodiment, the display **210** is rigidly coupled to the housing **201**. The housing **201** moves up and down as a whole with the display **210** attached thereto. Hence, the distance between the display **210**, and the window **315** through which the display is viewed, is always substantially the same.

A flexible cable, e.g., a ribbon cable **300** forms the connection between the display and the circuit board **235**. Although this describes a circuit board **235**, it should be understood that any kind of connection could be used in place of the circuit board.

The display **210** moves with the button **301**, and therefore the display always has the same spatial relationship with the housing. This avoids parallax.

In an alternative embodiment, shown in FIG. **4**, the display **210** remains fixed in place e.g. by a pair of standoffs **400**, **402** which may include connections therein. The housing **401** moves up and down. A switch **410** is connected to a portion of the housing via a spring bias connection. The housing **401** is usually spring biased into the upward position, and can be pressed down against the force of the spring **411**, to actuate the switch **410**. In this way, the movement of the housing **401** causes an actuation. This may be a simpler connection technique, but may cause some parallax during its operation.

An alternative embodiment may move only the window **215**, without moving the rest of the walls of housing **201**. Other alternatives may allow moving the housing in other directions other than downward; for example a housing may be moved up to actuate or maybe move side to side to actuate.

In all of these above embodiments, since the switch device **230** is used, the tactile feel of the switch can be obtained when the housing is moved to actuate it.

FIGS. **5a** and **5b** illustrate the two alternative embodiments for producing the display. These embodiments can be used with any of the embodiments of FIGS. **2-4**.

In a first embodiment, the display assembly **210** is formed of a transmissive device **500**, such as a liquid crystal device. A light source **505**, such as a white LED, produces light that illuminates the liquid crystal. Of course, multiple LEDs, such as an array of LEDs, may be used, or alternative light sources can be used. The light source can be powered by the same power line that produces the drive to the liquid crystal **500**.

In a second embodiment, shown in FIG. **5b**, an emissive device is used as display **520**, such as an emissive LED, or other electronically emissive device.

As shown in FIG. **1**, buttons may be arranged in a two-dimensional rectangular array. According to an embodiment, each of the buttons of the array show what they are going to represent. Another embodiment, shown in FIG. **6**, may have certain advantages. In this other embodiment, an array of buttons, such as **600**, are arranged together. A separate actuator **615**, which may be a button or some other actuator, commands a preview mode. When the preview mode is actuated, the buttons **600** through **609** collectively form a video wall-type device, where each button forms one pixel of an overall display. In this embodiment, there is preferably less distance between the buttons, for example the ratio of area between the buttons and area of the buttons may be 20% or less; more preferably 10% or less.

Upon actuating the preview mode button **615**, a larger display is formed among all the buttons **600** through **609**. When not in preview mode, each button can individually show what it is going to represent. Each of those representations can represent a function of any of the buttons, or a function of the entire group of the buttons.

An advantage of this embodiment, at least in one form, is that a single video driver **620** may be used for all the buttons **609**. In an embodiment where each button must produce its own display, it may be required that each button includes its own display driver.

Another embodiment may avoid the use of multiple drivers. This system uses a single display part shown as **702** displaying multiple different sub images shown as **702**, **704**. Each sub image is associated with an actuator, shown as **710**, which is co-located with the image. However, since a single screen **702** displays an entire image, only one video driver **725** is necessary.

FIG. **7b** illustrates a cross-section along the line **7B-7B** in FIG. **7a**. The screen, **700**, which may be a liquid crystal screen or a touch screen, forms the bottommost portion. An illumination part **720** may illuminate the screen **700** if it is not emissive. The display **700** is driven by a single display driver shown as **725**, which in turn receives information from a processor. A connection part, for example a PC board **730**, is located over the display **700**. PC board **730** includes different connections, for a movable spring device. The actuation device **740** is spring-loaded using springs and a tactile response mechanism **745**, relative to the PC boards **730**. A hole **746** in the PC board allows the light from the display shown as **747** to reach through the button portion **740**. The buttons **740** may be, for example, transparent, so that the light and portions of the screen, may be seen therethrough.

Alternatively, the actuation portion **745** may include some kind of lensing system therein, for example, a magnifying lens. Hence, the actuation part **740** forms both the display and the button. The spring **745** forms both the spring, contact and tactile mechanism. A lensing system **750** is optionally provided between the display **700** and the actuator **740**, in order to maintain or focus the image from the display on the proper portion of the actuation surface of the button **740**.

An alternative system may operate as shown in FIG. **7c**, which allows using a touch screen for the operation. Actuation mechanism is connected to an actuator part **760** which includes a bottom surface **761** adapted to touch the touch screen **770** which displays the display. The actuator part **760** allows the light from the touch screen **770** to pass therethrough. A first embodiment may use a transparent actuator **760**. A second embodiment includes a hole therethrough, through which the image of the touch screen can be seen either directly or through a lensing system.

The actuation device **760** may be spring-loaded using a spring **762**.

In any of the embodiments disclosed above, the video buttons can each be used for controlling any function of any of a plurality of remotely located stage lights. For example, a button can be used for fading, cross-fading, assigning an image or gobo to a light, assigning a color to a light, or any other function conventionally carried out by stage lighting systems. However, this control can also be used for other kinds of controlling.

The above has described a snap action element, however it should be understood that any tactile element such as a dome or clicking element can be used.

Although only a few embodiments have been disclosed in detail above, other embodiments are possible and the inventors intend these to be encompassed within this specification.

5

The specification describes specific examples to accomplish a more general goal that may be accomplished in another way. This disclosure is intended to be exemplary, and the claims are intended to cover any modification or alternative which might be predictable to a person having ordinary skill in the art. For example, different display techniques, types and drivers may be used.

The computers described herein may be any kind of computer, either general purpose, or some specific purpose computer such as a workstation. The computer may be a Pentium class computer, running Windows XP or Linux, or may be a Macintosh computer. The programs may be written in C, or Java, or any other programming language. The programs may be resident on a storage medium, e.g., magnetic or optical, e.g. the computer hard drive, a removable disk or other removable medium. The programs may also be run over a network, for example, with a server or other machine sending signals to the local machine, which allows the local machine to carry out the operations described herein.

Also, the inventors intend that only those claims which use the words "means for" are intended to be interpreted under 35 USC 112, sixth paragraph. Moreover, no limitations from the specification are intended to be read into any claims, unless those limitations are expressly included in the claims.

What is claimed is:

1. A method, comprising:
 - providing an array of actuator controls as an array of physical buttons that can be physically moved to control a function associated therewith;
 - enabling any of said actuator controls to control a specified function by moving one of said physical buttons, where at least one of said actuator controls a different function than another of said actuator controls, and where the buttons are moved to control functions;
 - providing a pixel based image displaying part, in each of said actuator controls such that said pixel based image displaying part can be seen through the actuator control; and
 - providing an overall single display that is displayed using all of the actuator controls of the entire array of pixel based image displaying parts, such that the entire array of actuator controls displays said display, and each individual control of the array of actuator controls shows said displaying part through the actuator control and the single scene on the display being seen through all of the actuator control such that each actuator forms a single pixel of the single scene.
2. A method as in claim 1, wherein said display is related to functions of one of said buttons.
3. A method as in claim 1, wherein said display is related to functions of buttons forming the array.
4. A method as in claim 1, further comprising providing an additional control, which selects an array preview function, said additional control, when actuated, causing the entire array to define a preview function, and when deactivated, each button displaying a separate display indicative of its individual function.
5. A method as in claim 1, further comprising providing a single display driver for the entire array.
6. A method as in claim 1, wherein said providing a display comprises providing a still image display.
7. A method as in claim 1, wherein said providing a display comprises providing a video display.
8. A method as in claim 1, further comprising changing a function of one of said actuator controls, and automatically changing said overall display based on said function.

6

9. A method as in claim 1, wherein said display comprises an individual display for each actuator in the array.

10. A method as in claim 1, wherein said display comprises a single display, which is logically driven to provide a plurality of different portions, one of said portions associated with each for said actuator controls.

11. A method as in claim 1, wherein said display comprises a touch screen display, and said physical button is moved to touch the touch screen display.

12. An apparatus comprising:
a single display;

a video driver, providing in a first mode a single overall display on said single display, and providing in a second mode, multiple separated displays on said single display;

a plurality of actuatable buttons, each having a window through which said display can be seen, and where said plurality of actuatable movable buttons show a single overall display formed of each of the plurality of displays seen through multiple windows on the plurality of actuatable buttons in said first mode, and where said plurality of actuatable buttons show, in said second mode, said multiple separated displays with each separated display seen through one of said plurality of actuatable buttons, and where each of said buttons is moved to actuate a function.

13. An apparatus as in claim 12, further comprising a controller, which provides information to said video driver indicative of functions of said buttons.

14. An apparatus as in claim 13, wherein said functions of said buttons include an overall function of a single button.

15. An apparatus as in claim 13, wherein said functions of said buttons include an overall functions of said plurality of buttons.

16. An apparatus as in claim 13, further comprising a mote selection, but which allows selecting between a first mode in which a single display is displayed on all of said buttons, and a second mode, in which each button receives an individual display.

17. An apparatus as in claim 16, in which in said second mode, each individual display provides a preview of a function that will be controlled when the button is actuated.

18. An apparatus as in claim 13, wherein said controller adaptively defines a function to be carried out by each of said buttons, and controls sending display information to said buttons indicative of the function to be carried out.

19. An apparatus as in claim 18, wherein said controller allows changing a function to be carried out by a button, and automatically sending new display information to said button.

20. An apparatus as in claim 1, further comprising a control board, mounted over said display, having holes therein through which said display can be used, said control board having at least one connection thereon.

21. An apparatus as in claim 20, further comprising at least one switch, associated with said actuatable buttons, said at least one switch mounted on said control board.

22. An apparatus as in claim 12, further comprising at least one spring-loaded element, spring loading each of said actuatable buttons into an actuated state, and wherein each of said actuatable buttons can be pressed into an actuated state against a force of said spring force.

23. An apparatus as in claim 22, further comprising a plurality of optical elements, associated with said actuatable buttons.

24. An apparatus as in claim 23, wherein said optical elements comprise lenses.

7

25. An apparatus as in claim 12, wherein said display is a touch screen, and said actuatable buttons comprise buttons that can be moved with actuators thereon to touch said touch screen.

26. An apparatus as in claim 25, wherein said actuatable buttons include see-through actuators. 5

27. An apparatus as in claim 26, wherein said actuators include at least one portion formed of a transparent material.

28. An apparatus as in claim 26, wherein said actuators include at least one hole therein through which the screen below can be seen. 10

29. An apparatus as in claim 25, further comprising at least one spring, biasing at least one of said actuatable buttons into an upward position.

30. An apparatus, comprising:

a single display device, an array of controlling buttons, arranged adjacent said display device, such that different buttons can be seen through to see portions of said display device below said buttons, and wherein each button uses a different portion of said display device; 15

8

an actuation part, associated with each button; and

a preview control, controlling whether said single display device displays either a single display that is seen through the group of said buttons such that each button forms a single pixel of the single scene, or whether said single display displays multiple separate displays, each seen through one of said buttons.

31. An apparatus as in claim 30, wherein said actuation part comprises a mechanical switch.

32. An apparatus as in claim 30, wherein said single display device includes a touch screen, and said button moves to touch a surface of said touch screen.

33. An apparatus as in claim 30, further comprising a processor, controlling an association between each controlling button, and a function that it carries out, and also providing information to the display device indicative of a display that previews said function.

* * * * *